

AWK-3262A Series

Advanced industrial Wi-Fi 6 (802.11ax) wireless AP/bridge/clients



Features and Benefits

- IEEE 802.11ax Wi-Fi 6 AP/bridge/client
- Concurrent dual-band Wi-Fi with aggregated data rates up to 1.775 Gbps
- Wi-Fi 6 OFDMA and Spatial Reuse technologies enable multi-client communication in high-density environments
- Adaptive self-forming, self-healing, and controller-agnostic mesh network with AeroMesh
- -40 to 75°C wide operating temperature (-T) models provided for smooth wireless communication in harsh environments
- Built-in 2.4 GHz and 5 GHz band pass filter for more reliable wireless connections
- Power and antenna port isolation for enhanced ESD/surge protection and durability in extreme conditions

Certifications



Introduction

The AWK-3262A Series is engineered for reliable wireless connectivity in demanding indoor industrial environments such as automated factories and warehouses. Its robust enclosure provides superior protection against the elements, combined with antenna and power isolation to protect against ESD and power surges. The built-in 2.4/5 GHz band-pass filter minimizes out-of-band interference while the Wi-Fi 6 OFDMA and spatial reuse technologies ensure stable connections in crowded networks.

Featuring AeroMesh technology, the AWK-3262A Series simplifies network deployment where cabling is impractical or costly. Self-forming and self-healing wireless paths speed up deployment and configuration in highly dynamic applications while minimizing downtime.

Tailored Industrial Wireless Technology

- Auto Channel Selection automatically scans and selects the optimal operating channel based on real-time analysis to minimize interference and enhance wireless performance
- AP-agnostic seamless roaming with client-based Turbo Roaming¹ for sub-150 ms roaming recovery times between APs (in Client mode)
- 802.11k/v/r Fast Roaming enables faster, more reliable Wi-Fi client roaming and improved third-party interoperability
- DFS channel support for a wider range of 5 GHz channels to avoid interference from existing wireless infrastructure
- AP-based client disconnection mechanism to help wireless clients without roaming intelligence obtain optimal AP services
- Universal (UN) models with configurable country for more flexible global deployment
- Dedicated MXview Wireless network management software with dynamic topology view, interactive roaming history playback, and detailed device information and performance indicator charts
- Troubleshooting SSID functionality for client-based operation modes activates a temporary SSID when the connection to the AP to perform wireless diagnostics
- Latest WPA3 encryption for enhanced wireless network security

Industrial Compliance and Certifications

- CC-Link IE TSN certified time-sensitive performance required to integrate wireless devices into advanced factory automation networks
- Compliant with EN 18031-1 to ensure both EU regulatory alignment and enhanced protection against cyberthreats

1. The Turbo Roaming recovery time indicated herein is an average of test results documented, in optimized conditions, across APs configured with interference-free 20-MHz RF channels, WPA2-PSK security, and default Turbo Roaming parameters. The clients are configured with 3-channel roaming at 100 Kbps traffic load. Other conditions may also impact roaming performance. For more information about Turbo Roaming parameter settings, refer to the product manual.

Specifications

WLAN Interface	
WLAN Standards	2.4 GHz: 802.11ax with 1024 QAM support, 20/40 MHz 5 GHz: 802.11ax with 1024 QAM support, 20/40/80 MHz WMM for QoS
Frequency Band for US (20 MHz operating channels)	AWK-3262A-US models only: 2.412 to 2.462 GHz (11 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ² 5.500 to 5.700 GHz (11 channels) ² 5.745 to 5.825 GHz (5 channels)
Frequency Band for UN (20 MHz operating channels)	AWK-3262A-UN models only: 2.412 to 2.472 GHz (13 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ² 5.500 to 5.700 GHz (11 channels) ² 5.745 to 5.825 GHz (5 channels) Available channels change depending on the selected country or region code.
Wireless Security	WPA/WPA2/WPA3-Enterprise (IEEE 802.1X/RADIUS, TKIP, AES) WPA/WPA2/WPA3-Personal
Wireless Roaming	Turbo Roaming ³ 802.11k/v/r ⁴
Transmission Rate	2.4 GHz: Up to 573.5 Mbps 5 GHz: Up to 1,201 Mbps
Transmitter Power for 802.11a (Dual Chain)	27 ⁵ ±1.5 dBm @ 6 Mbps 24.5 ⁵ ±1.5 dBm @ 54 Mbps
Transmitter Power for 802.11n (5 GHz, Dual Chain)	26±1.5 dBm @ MCS0 20 MHz 22±1.5 dBm @ MCS7 20 MHz 26±1.5 dBm @ MCS0 40 MHz 22±1.5 dBm @ MCS7 40 MHz
Transmitter Power for 802.11ac (Dual Chain)	26±1.5 dBm @ MCS0 20 MHz 22±1.5 dBm @ MCS8 20 MHz 25±1.5 dBm @ MCS0 40 MHz 21±1.5 dBm @ MCS9 40 MHz 25±1.5 dBm @ MCS0 80 MHz 21±1.5 dBm @ MCS9 80 MHz
Transmitter Power for 802.11ax (Dual Chain)	25±1.5 dBm @ MCS0 20 MHz 20±1.5 dBm @ MCS11 20 MHz 25±1.5 dBm @ MCS0 40 MHz 20±1.5 dBm @ MCS11 40 MHz 25±1.5 dBm @ MCS0 80 MHz 20±1.5 dBm @ MCS11 80 MHz
Transmitter Power for 802.11b (Dual Chain)	29 ⁶ ±1.5 dBm @ 1 Mbps 29 ⁶ ±1.5 dBm @ 11 Mbps
Transmitter Power for 802.11g (Dual Chain)	27±1.5 dBm @ 6 Mbps 26±1.5 dBm @ 54 Mbps
Transmitter Power for 802.11n (2.4 GHz, Dual Chain)	26±1.5 dBm @ MCS0 20 MHz 24±1.5 dBm @ MCS7 20 MHz

- DFS (Dynamic Frequency Selection) channel support: In AP mode, when a radar signal is detected, the device will automatically switch to another channel. However, according to regulations, after switching channels, a 60-second availability check period is required before starting the service.
- The Turbo Roaming recovery time indicated herein is an average of test results documented, in optimized conditions, across APs configured with interference-free 20-MHz RF channels, WPA2-PSK security, and default Turbo Roaming parameters. The clients are configured with 3-channel roaming at 100 Kbps traffic load. Other conditions may also impact roaming performance. For more information about Turbo Roaming parameter settings, refer to the product manual.
- 802.11k/v are not supported in Client-based modes.
- When the ambient operating temperature exceeds 70°C, the maximum transmitter power should be set to 24 dBm to prevent performance degradation.
- When the ambient operating temperature exceeds 70°C, the maximum transmitter power should be set to 26 dBm to prevent performance degradation.

	26±1.5 dBm @ MCS0 40 MHz 24±1.5 dBm @ MCS7 40 MHz
Transmitter Power for 802.11ac (2.4 GHz, Dual Chain)	26±1.5 dBm @ MCS0 20 MHz 24±1.5 dBm @ MCS8 20 MHz 26±1.5 dBm @ MCS0 40 MHz 23±1.5 dBm @ MCS9 40 MHz
Transmitter Power for 802.11ax (2.4 GHz, Dual Chain)	26±1.5 dBm @ MCS0 20 MHz 21±1.5 dBm @ MCS11 20 MHz 26±1.5 dBm @ MCS0 40 MHz 21±1.5 dBm @ MCS11 40 MHz
Receiver Sensitivity for 802.11a	Typ. -90 dBm @ 6 Mbps Typ. -72 dBm @ 54 Mbps
Receiver Sensitivity for 802.11n (5 GHz)	Typ. -89 dBm @ MCS0 20 MHz Typ. -69 dBm @ MCS7 20 MHz Typ. -86 dBm @ MCS0 40 MHz Typ. -66 dBm @ MCS7 40 MHz
Receiver Sensitivity for 802.11ac (5 GHz)	Typ. -89 dBm @ MCS0 20 MHz Typ. -66 dBm @ MCS8 20 MHz Typ. -86 dBm @ MCS0 40 MHz Typ. -62 dBm @ MCS9 40 MHz Typ. -83 dBm @ MCS0 80 MHz Typ. -58 dBm @ MCS9 80 MHz
Receiver Sensitivity for 802.11ax (5 GHz)	Typ. -90 dBm @ MCS0 20 MHz Typ. -59 dBm @ MCS11 20 MHz Typ. -87 dBm @ MCS0 40 MHz Typ. -56 dBm @ MCS11 40 MHz Typ. -84 dBm @ MCS0 80 MHz Typ. -53 dBm @ MCS11 80 MHz
Receiver Sensitivity for 802.11b	Typ. -96 dBm @ 1 Mbps Typ. -88 dBm @ 11 Mbps
Receiver Sensitivity for 802.11g	Typ. -91 dBm @ 6 Mbps Typ. -75 dBm @ 54 Mbps
Receiver Sensitivity for 802.11n (2.4 GHz)	Typ. -91 dBm @ MCS0 20 MHz Typ. -72 dBm @ MCS7 20 MHz Typ. -88 dBm @ MCS0 40 MHz Typ. -69 dBm @ MCS7 40 MHz
Receiver Sensitivity for 802.11ac (2.4 GHz)	Typ. -91 dBm @ MCS0 20 MHz Typ. -68 dBm @ MCS8 20 MHz Typ. -88 dBm @ MCS0 40 MHz Typ. -64 dBm @ MCS9 40 MHz
Receiver Sensitivity for 802.11ax (2.4 GHz)	Typ. -91 dBm @ MCS0 20 MHz Typ. -59 dBm @ MCS11 20 MHz Typ. -88 dBm @ MCS0 40 MHz Typ. -56 dBm @ MCS11 40 MHz
WLAN Operation Mode	Access point Client Client-Router Master Slave Sniffer Mesh
Antenna	External, 2/2 dBi Omni-directional
Antenna Connectors	2 RP-SMA female

Ethernet Interface

Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3bz for 2.5GBaseT IEEE 802.3at for PoE IEEE 802.3bt for PoE IEEE 802.3az for Energy-Efficient Ethernet IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication
10/100/1000BaseT(X) Ports (RJ45 connector)	1
PoE Ports (10/100/1000/2500BaseT(X), RJ45 connector)	1

Ethernet Software Features

Management	DHCP Server DHCP Client DNS HTTP IPv4/IPv6 LLDP SMTP SNMPv1/v2c/v3 Syslog TCP/IP UDP VLAN MXconfig MXview One MXview Wireless Turbo Roaming Analyzer
Routing	Port forwarding Static Route NAT
Security	HTTPS/SSL RADIUS SSH Certificate Management
Time Management	SNTP Client
Firewall	
Filter	ICMP MAC address IP protocol Port-based Wi-Fi ACL Client Isolation

Serial Interface

Console Port	RS-232 8-pin RJ45
--------------	----------------------

USB Interface

Storage Port	USB Type A (for ABC-02 use only)
--------------	----------------------------------

LED Interface

LED Indicators	PWR1, PWR2, PoE, SYS, 2.4G, 5G
----------------	--------------------------------

Input/Output Interface

Digital Inputs	2 Max. input current: 8 mA +13 to +30 V for state 1 +3 to -30 V for state 0
Alarm Contact Channels	Relay output with current carrying capacity of 1 A @ 24 VDC
Buttons	Reset button

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	45 x 130 x 100 mm (1.77 x 5.12 x 3.94 in)
Weight	755 g (1.7 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Power Parameters

Input Current	12 to 48 VDC, 2 to 0.5 A
Input Voltage	12 to 48 VDC Redundant dual inputs 48 VDC Power over Ethernet
Power Connector	1 removable 8-contact terminal block(s)
Power Consumption	24 W (max.)

Environmental Limits

Operating Temperature	Standard models: -25 to 60°C (-13 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 61000-6-2/-6-4 EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V/m IEC 61000-4-8 PFMF: 30 A/m
Safety	IEC 62368-1 UL 62368-1
Cybersecurity	EN 18031-1
Vibration	IEC 60068-2-6
Radio	EN 300 328, EN 301 489-1/17, EN 301 893, FCC, MIC, NCC, RCM, SRRC, KC, IC

MTBF

Time	2,407,106 hrs
Standards	Telcordia Standard SR-332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x AWK-3262A Series wireless AP/bridge/client
Installation Kit	1 x DIN-rail kit
Antenna	2 x 2.4/5 GHz antenna
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

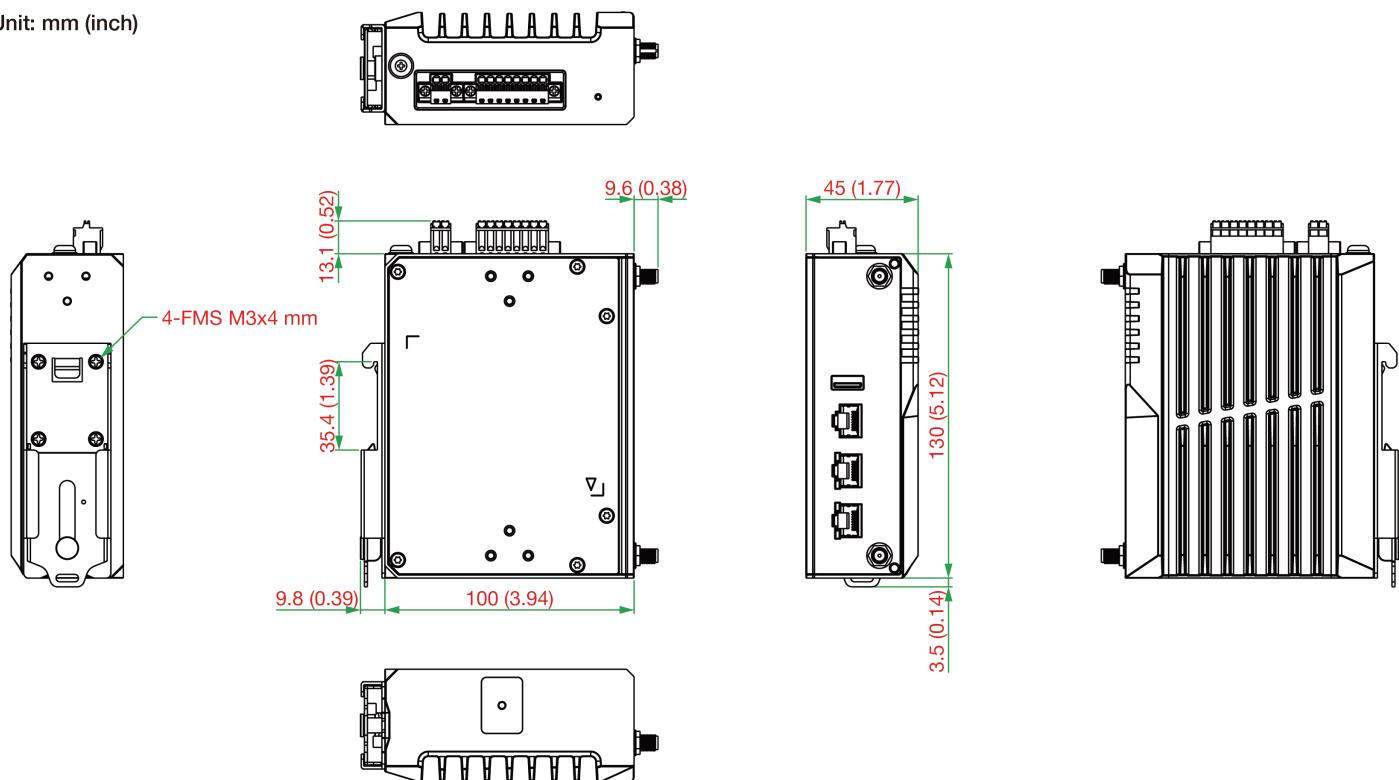

Ordering Information

Model Name	Band	Standards	Operating Temp.
AWK-3262A-UN	UN	802.11a/b/g/n/ac/ax	-25 to 60°C
AWK-3262A-UN-T	UN	802.11a/b/g/n/ac/ax	-40 to 75°C
AWK-3262A-US	US	802.11a/b/g/n/ac/ax	-25 to 60°C
AWK-3262A-US-T	US	802.11a/b/g/n/ac/ax	-40 to 75°C

Accessories (sold separately)

Antennas

ANT-WSB-PNF-12-02	12 dBi at 2.4 GHz, N-type (female), single-band directional antenna
ANT-WSB5-PNF-16	16 dBi at 5 GHz, N-type (female), single-band directional antenna
ANT-WDB-ONM-0707	07 dBi at 2.4 GHz and 07 dBi at 5 GHz, N-type (male), dual-band omnidirectional antenna
ANT-WDB-PNF-1011	10 dBi at 2.4 GHz and 11 dBi at 5 GHz, N-type (female), dual-band directional antenna
ANT-WDB-ONF-0709	7 dBi at 2.4 GHz or 9 dBi at 5 GHz, N-type (female), dual-band, omnidirectional antenna
ANT-WDB-ANM-0306	3 dBi at 2.4 GHz or 6 dBi at 5 GHz, N-type (male), omnidirectional antenna
ANT-WDB-ARM-02	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male) omnidirectional rubber-duck antenna
ANT-WDB-ARM-0202	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male), dual-band, omnidirectional antenna
ANT-WSB-AHRM-05-1.5m	5 dBi at 2.4 GHz, RP-SMA (male), omnidirectional/dipole antenna, 1.5 m cable
MAT-WDB-CA-RM-2-0205	2.4/5 GHz, ceiling antenna, 2/5 dBi, MIMO 2x2, RP-SMA-type (male)
MAT-WDB-DA-RM-2-0203-1m	2.4/5 GHz, desktop antenna, 2/3 dBi, MIMO 2x2, RP-SMA-type (male), 1 m cable
MAT-WDB-PA-NF-2-0708	2.4/5 GHz, panel antenna, 7/8 dBi, MIMO 2x2, N-type (female)
ANT-WDB-ANM-0502	5 dBi at 2.4 GHz or 2 dBi at 5 GHz, N-type (male), omnidirectional antenna

Wireless Antenna Cables

A-CRF-RFRM-R5-60	Wireless antenna cable with RP-SMA (female) to RP-SMA (male) connectors, RG-402 type, 0.6 m
A-CRF-RFRM-R4-150	Wireless antenna cable with RP-SMA (female) to RP-SMA (male) connectors, magnetic base, RG-174 type, 1.5 m
A-CRF-RMNM-L1-300	N-type (male) to RP SMA (male) LMR-195 Lite cable, 3 m
A-CRF-RMNM-L1-600	N-type (male) to RP SMA (male) LMR-195 Lite cable, 6 m
A-CRF-RMNM-L1-900	N-type (male) to RP SMA (male) LMR-195 Lite cable, 9 m

Surge Arrestors

A-SA-NMNF-02	0 to 6 GHz, N-type (male) to N-type (female) surge arrester
A-SA-NFNF-02	0 to 6 GHz, N-type (female) to N-type (female) surge arrester

Wireless Terminating Resistors

A-TRM-50-NM	50-ohm termination resistor with N-type male connector
-------------	--

Cables

CBL-RJ45F25-150	8-pin RJ45 to DB25 female serial cable, 1.5 m
CBL-RJ45F9-150	8-pin RJ45 to DB9 female serial cable, 1.5m

Wall-Mounting Kits

WK-35-05	Wall-mounting kit with 2 plates (35 x 44 x 2.5 mm), 6 NYLOK screws
----------	--

© Moxa Inc. All rights reserved. Updated Jan 07, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.