

TAP-213 Series

Wi-Fi 4 (802.11n) railway train-to-ground IP68 wireless AP/clients



Features and Benefits

- Powered by redundant dual DC power inputs or PoE
- Seamless train-to-ground communication with sub-50 ms controller-based Turbo Roaming
- Onboard wireless network redundancy with AeroLink Protection

Certifications



Introduction

The TAP-213 Series Wi-Fi 4 (802.11n) railway train-to-ground IP68-rated wireless AP/clients are built for CBTC, CCTV, and BBRS communications, supporting seamless controller-based Turbo Roaming with handover times under 50 ms. They offer dual DC and PoE power inputs for reliable and flexible power options. With AeroLink Protection for wireless redundancy, the TAP-213 Series ensures high network availability for robust wireless connectivity.

Specifications

WLAN Interface

WLAN Standards	2.4 GHz: 802.11b/g/n with 64 QAM support, 20/40 MHz 5 GHz: 802.11a/n with 64 QAM support, 20/40 MHz
Frequency Band for US (20 MHz operating channels)	TAP-213-US models only: 2.412 to 2.462 GHz (11 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) 5.500 to 5.700 GHz (8 channels) Excludes 5.600 to 5.640 ¹ 5745 to 5825 GHz (5 channels)
Frequency Band for EU (20 MHz operating channels)	TAP-213-EU models only: 2.412 to 2.472 GHz (13 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) 5.500 to 5.700 GHz (11 channels)
Frequency Band for JP (20 MHz operating channels)	TAP-213-JP models only: 2.412 to 2.484 GHz (14 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) 5.500 to 5.700 GHz (11 channels)
Receiver Sensitivity for 802.11a (measured at 5.680 GHz)	Typ. -90 @ 6 Mbps Typ. -88 @ 9 Mbps Typ. -88 @ 12 Mbps Typ. -85 @ 18 Mbps Typ. -81 @ 24 Mbps Typ. -78 @ 36 Mbps Typ. -74 @ 48 Mbps

1. DFS (Dynamic Frequency Selection) channel support: In AP mode, when a radar signal is detected, the device will automatically switch to another channel. However, according to regulations, after switching channels, a 60-second availability check period is required before starting the service.

	<p>Typ. -74 @ 54 Mbps</p> <p>Note: Due to a limitation in the receiver sensitivity performance for channels 153 and 161, it is recommended to avoid using these channels in your critical applications.</p>
Receiver Sensitivity for 802.11n (5 GHz; measured at 5.680 GHz)	<p>Typ. -88 dBm @ MCS0 20 MHz</p> <p>Typ. -85 dBm @ MCS1 20 MHz</p> <p>Typ. -82 dBm @ MCS2 20 MHz</p> <p>Typ. -79 dBm @ MCS3 20 MHz</p> <p>Typ. -76 dBm @ MCS4 20 MHz</p> <p>Typ. -71 dBm @ MCS5 20 MHz</p> <p>Typ. -70 dBm @ MCS6 20 MHz</p> <p>Typ. -69 dBm @ MCS7 20 MHz</p> <p>Typ. -95 dBm @ MCS8 20 MHz</p> <p>Typ. -91 dBm @ MCS9 20 MHz</p> <p>Typ. -87 dBm @ MCS10 20 MHz</p> <p>Typ. -80 dBm @ MCS11 20 MHz</p> <p>Typ. -78 dBm @ MCS12 20 MHz</p> <p>Typ. -74 dBm @ MCS13 20 MHz</p> <p>Typ. -72 dBm @ MCS14 20 MHz</p> <p>Typ. -71 dBm @ MCS15 20 MHz</p> <p>Typ. -84 dBm @ MCS0 40 MHz</p> <p>Typ. -81 dBm @ MCS1 40 MHz</p> <p>Typ. -77 dBm @ MCS2 40 MHz</p> <p>Typ. -75 dBm @ MCS3 40 MHz</p> <p>Typ. -71 dBm @ MCS4 40 MHz</p> <p>Typ. -67 dBm @ MCS5 40 MHz</p> <p>Typ. -64 dBm @ MCS6 40 MHz</p> <p>Typ. -63 dBm @ MCS7 40 MHz</p> <p>Typ. -90 dBm @ MCS8 40 MHz</p> <p>Typ. -85 dBm @ MCS9 40 MHz</p> <p>Typ. -82 dBm @ MCS10 40 MHz</p> <p>Typ. -81 dBm @ MCS11 40 MHz</p> <p>Typ. -77 dBm @ MCS12 40 MHz</p> <p>Typ. -73 dBm @ MCS13 40 MHz</p> <p>Typ. -71 dBm @ MCS14 40 MHz</p> <p>Typ. -68 dBm @ MCS15 40 MHz</p> <p>Note: Due to a limitation in the receiver sensitivity performance for channels 153 and 161, it is recommended to avoid using these channels in your critical applications.</p>
Receiver Sensitivity for 802.11b (measured at 2.437 GHz)	<p>Typ. -93 dBm @ 1 Mbps</p> <p>Typ. -93 dBm @ 2 Mbps</p> <p>Typ. -93 dBm @ 5.5 Mbps</p> <p>Typ. -88 dBm @ 11 Mbps</p>
Receiver Sensitivity for 802.11g (measured at 2.437 GHz)	<p>Typ. -90 dBm @ 6 Mbps</p> <p>Typ. -88 dBm @ 9 Mbps</p> <p>Typ. -88 dBm @ 12 Mbps</p> <p>Typ. -85 dBm @ 18 Mbps</p> <p>Typ. -81 dBm @ 24 Mbps</p> <p>Typ. -78 dBm @ 36 Mbps</p> <p>Typ. -74 dBm @ 48 Mbps</p> <p>Typ. -74 dBm @ 54 Mbps</p>
Receiver Sensitivity for 802.11n (2.4 GHz; measured at 2.437 GHz)	<p>Typ. -89 dBm @ MCS0 20 MHz</p> <p>Typ. -85 dBm @ MCS1 20 MHz</p> <p>Typ. -85 dBm @ MCS2 20 MHz</p> <p>Typ. -82 dBm @ MCS3 20 MHz</p> <p>Typ. -78 dBm @ MCS4 20 MHz</p> <p>Typ. -74 dBm @ MCS5 20 MHz</p> <p>Typ. -72 dBm @ MCS6 20 MHz</p> <p>Typ. -70 dBm @ MCS7 20 MHz</p> <p>Typ. -95 dBm @ MCS8 20 MHz</p> <p>Typ. -90 dBm @ MCS9 20 MHz</p> <p>Typ. -87 dBm @ MCS10 20 MHz</p> <p>Typ. -83 dBm @ MCS11 20 MHz</p> <p>Typ. -80 dBm @ MCS12 20 MHz</p> <p>Typ. -74 dBm @ MCS13 20 MHz</p> <p>Typ. -71 dBm @ MCS14 20 MHz</p> <p>Typ. -69 dBm @ MCS15 20 MHz</p> <p>Typ. -87 dBm @ MCS0 40 MHz</p> <p>Typ. -83 dBm @ MCS1 40 MHz</p> <p>Typ. -83 dBm @ MCS2 40 MHz</p> <p>Typ. -80 dBm @ MCS3 40 MHz</p>

	Typ. -76 dBm @ MCS4 40 MHz Typ. -73 dBm @ MCS5 40 MHz Typ. -69 dBm @ MCS6 40 MHz Typ. -67 dBm @ MCS7 40 MHz Typ. -93 dBm @ MCS8 40 MHz Typ. -88 dBm @ MCS9 40 MHz Typ. -85 dBm @ MCS10 40 MHz Typ. -82 dBm @ MCS11 40 MHz Typ. -78 dBm @ MCS12 40 MHz Typ. -73 dBm @ MCS13 40 MHz Typ. -69 dBm @ MCS14 40 MHz Typ. -67 dBm @ MCS15 40 MHz
Transmission Rate	802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11n HT20: 6.5 to 144.4 Mbps (MCS0 to MCS15) 802.11n HT40: 13.5 to 300 Mbps (MCS0 to MCS15)
Transmitter Power for 802.11a	23±1.5 dBm @ 6 Mbps 23±1.5 dBm @ 12 Mbps 23±1.5 dBm @ 24 Mbps 21±1.5 dBm @ 36 Mbps 20±1.5 dBm @ 48 Mbps 18±1.5 dBm @ 54 Mbps
Transmitter Power for 802.11n (5 GHz)	23±1.5 dBm @ MCS0 20 MHz 20±1.5 dBm @ MCS1 20 MHz 20±1.5 dBm @ MCS2 20 MHz 20±1.5 dBm @ MCS3 20 MHz 19±1.5 dBm @ MCS4 20 MHz 18±1.5 dBm @ MCS5 20 MHz 18±1.5 dBm @ MCS6 20 MHz 18±1.5 dBm @ MCS7 20 MHz 23±1.5 dBm @ MCS8 20 MHz 20±1.5 dBm @ MCS9 20 MHz 20±1.5 dBm @ MCS10 20 MHz 20±1.5 dBm @ MCS11 20 MHz 19±1.5 dBm @ MCS12 20 MHz 19±1.5 dBm @ MCS13 20 MHz 18±1.5 dBm @ MCS14 20 MHz 18±1.5 dBm @ MCS15 20 MHz 23±1.5 dBm @ MCS0 40 MHz 20±1.5 dBm @ MCS1 40 MHz 20±1.5 dBm @ MCS2 40 MHz 20±1.5 dBm @ MCS3 40 MHz 19±1.5 dBm @ MCS4 40 MHz 18±1.5 dBm @ MCS5 40 MHz 18±1.5 dBm @ MCS6 40 MHz 18±1.5 dBm @ MCS7 40 MHz 23±1.5 dBm @ MCS8 40 MHz 20±1.5 dBm @ MCS9 40 MHz 20±1.5 dBm @ MCS10 40 MHz 20±1.5 dBm @ MCS11 40 MHz 19±1.5 dBm @ MCS12 40 MHz 19±1.5 dBm @ MCS13 40 MHz 18±1.5 dBm @ MCS14 40 MHz 18±1.5 dBm @ MCS15 40 MHz
Transmitter Power for 802.11b	26±1.5 dBm @ 1 Mbps 26±1.5 dBm @ 2 Mbps 26±1.5 dBm @ 5.5 Mbps 25±1.5 dBm @ 11 Mbps
Transmitter Power for 802.11g	23±1.5 dBm @ 6 Mbps 23±1.5 dBm @ 12 Mbps 23±1.5 dBm @ 24 Mbps 21±1.5 dBm @ 36 Mbps 20±1.5 dBm @ 48 Mbps 18±1.5 dBm @ 54 Mbps
Transmitter Power for 802.11n (2.4 GHz)	23±1.5 dBm @ MCS0 20 MHz 21±1.5 dBm @ MCS1 20 MHz 21±1.5 dBm @ MCS2 20 MHz

21±1.5 dBm @ MCS3 20 MHz
20±1.5 dBm @ MCS4 20 MHz
19±1.5 dBm @ MCS5 20 MHz
18±1.5 dBm @ MCS6 20 MHz
18±1.5 dBm @ MCS7 20 MHz
23±1.5 dBm @ MCS8 20 MHz
21±1.5 dBm @ MCS9 20 MHz
21±1.5 dBm @ MCS10 20 MHz
21±1.5 dBm @ MCS11 20 MHz
20±1.5 dBm @ MCS12 20 MHz
19±1.5 dBm @ MCS13 20 MHz
18±1.5 dBm @ MCS14 20 MHz
18±1.5 dBm @ MCS15 20 MHz
23±1.5 dBm @ MCS0 40 MHz
20±1.5 dBm @ MCS1 40 MHz
20±1.5 dBm @ MCS2 40 MHz
20±1.5 dBm @ MCS3 40 MHz
19±1.5 dBm @ MCS4 40 MHz
19±1.5 dBm @ MCS5 40 MHz
18±1.5 dBm @ MCS6 40 MHz
17±1.5 dBm @ MCS7 40 MHz
23±1.5 dBm @ MCS8 40 MHz
20±1.5 dBm @ MCS9 40 MHz
20±1.5 dBm @ MCS10 40 MHz
20±1.5 dBm @ MCS11 40 MHz
20±1.5 dBm @ MCS12 40 MHz
19±1.5 dBm @ MCS13 40 MHz
18±1.5 dBm @ MCS14 40 MHz
17±1.5 dBm @ MCS15 40 MHz

Wireless Security	WEP encryption (64-bit and 128-bit) WPA/WPA2-Enterprise (IEEE 802.1X/RADIUS, TKIP, AES) WPA/WPA2-Personal
WLAN Operation Mode	Access point Client Client-Router Sniffer
Antenna Connectors	2 x N-type female

Input/Output Interface	
Buttons	Reset button
Ethernet Interface	
Standards	IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3u for 100BaseT(X) IEEE 802.3at for PoE
1000BaseSFP Slots	1
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin female connector)	1
Total Port Count	2

Ethernet Software Features

Management	SNMPv1/v2c/v3 DHCP Server/Client IPv4 LLDP SMTP Syslog TCP/IP Telnet TFTP UDP Web Console Wireless Search Utility
Routing	Port forwarding
Security	HTTPS/SSL RADIUS SSH
Time Management	NTP Client SNTP

USB Interface

M12 Connector	M12 A-coded 5-pin female (for ABC-02 USB storage)
---------------	---

LED Interface

LED Indicators	PWR, FAULT, STATE, WLAN, LAN1, LAN2
----------------	-------------------------------------

Firewall

Filter	IP protocol MAC address Port-based
--------	--

Serial Interface

Console Port	USB-M12 console (M12 B-coded 5-pin female connector)
Parity	None, Even, Odd, Space, Mark

Power Parameters

Input Current	0.65 A @ 24 VDC, 0.16 A @ 110 VDC
Input Voltage	24 to 110 VDC Redundant dual inputs
Power Connector	M12 A-coded 4-pin male connector
Power Consumption	17.6 W (max.)
Reverse Polarity Protection	Supported
Source of Input Power	PoE (IEEE 802.3at)

Physical Characteristics


Housing	Metal
Dimensions	220 x 150 x 50.5 mm (8.66 x 5.91 x 1.99 in)
IP Rating	IP68
Weight	1,500 g (3.31 lb)

Installation	Wall mounting Pole mounting (with optional kit) DIN-rail mounting (with optional kit)
Protection	PCB conformal coating
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Safety	UL 60950-1 IEC 60950-1 EN 60950-1
Cybersecurity	EN 18031-1
Radio	EN 300 328 EN 301 489-1/17 EN 301 893 FCC IC WPC
Railway	EN 50121-4 EN 50155
Railway Fire Protection	EN 45545-2
MTBF	
Time	758,369 hrs
Standards	Telcordia Standard SR-332
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/warranty
Package Contents	
Device	1 x TAP-213 Series wireless AP/client
Installation Kit	1 x cap, metal, for ABC-02 USB storage port 1 x cap, metal, for LAN fiber port 1 x cap, metal, for USB console port 1 x cap, plastic, for LAN X-coded port 1 x metal M12 male 4-pin A-coded screw-type crimp circular connector for power 1 x wall-mounting kit

Antenna	2 x ANT-WDB-ANM-0502 2.4/5 GHz antenna
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

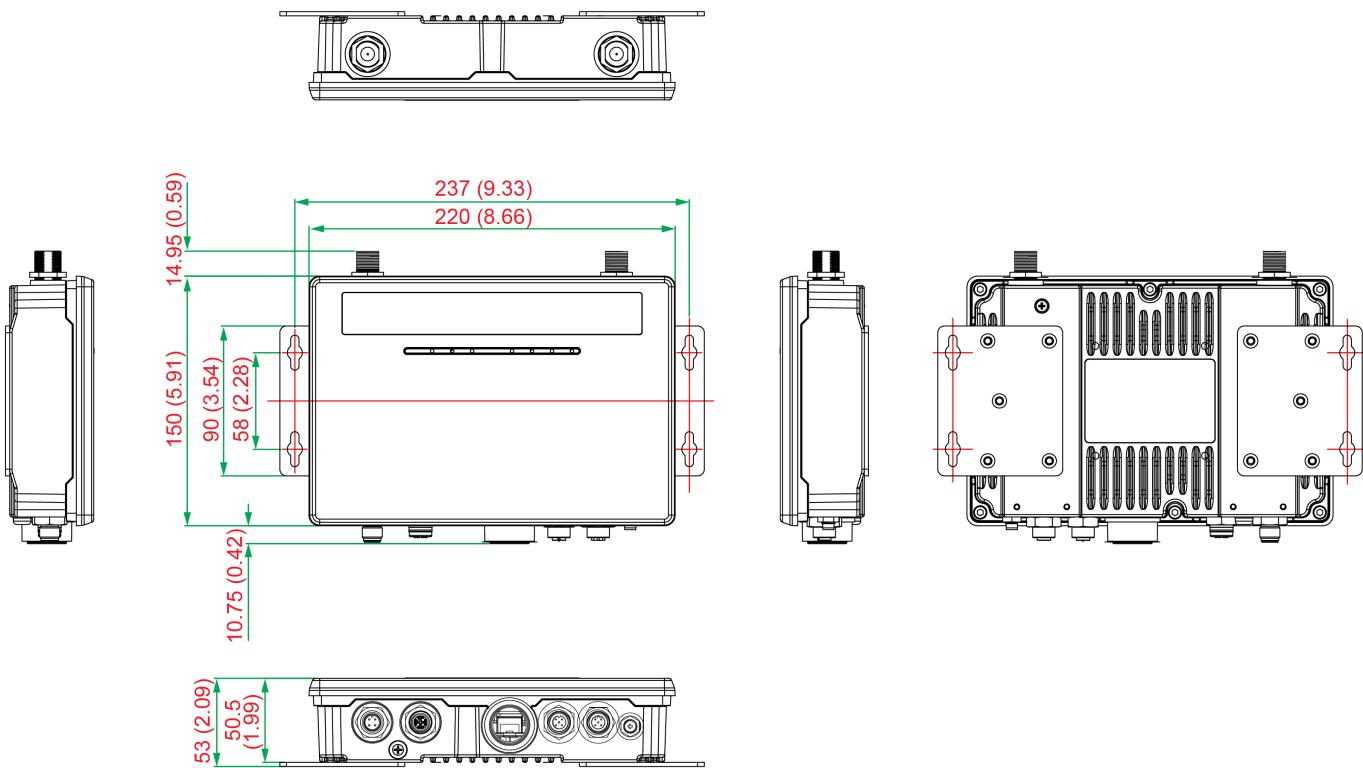

Ordering Information

Model Name	Band	Wi-Fi Standard	Application	Operating Temp.	Indoor/Outdoor, IP Code	Single/Dual RF
TAP-213-EU-CT-T	EU	802.11a/b/g/n	Railway onboard AP/client	-40 to 75°C	Outdoor, IP68	Single RF
TAP-213-US-CT-T	US	802.11a/b/g/n	Railway onboard AP/client	-40 to 75°C	Outdoor, IP68	Single RF
TAP-213-JP-CT-T	JP	802.11a/b/g/n	Railway onboard AP/client	-40 to 75°C	Outdoor, IP68	Single RF

Accessories (sold separately)

Antennas

ANT-WDB-ANM-0502	5 dBi at 2.4 GHz or 2 dBi at 5 GHz, N-type (male), omnidirectional antenna
ANT-WDB-ARM-02	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male) omnidirectional rubber-duck antenna
ANT-WDB-PNF-1518	15 dBi at 2.4 GHz or 18 dBi at 5 GHz, N-type (female), panel antenna

Wireless Antenna Cables

A-CRF-NMNM-LL4-900	N-type (male) to N-type (male) LMR-400 Lite cable, 9 m
A-CRF-NMNM-LL4-300	N-type (male) to N-type (male) LMR-400 Lite cable, 3 m
A-CRF-NMNM-LL4-600	N-type (male) to N-type (male) LMR-400 Lite cable, 6 m

M12 Connector Caps

A-CAP-M12F-M

Metal cap for M12 female connector

Wireless AP Connector Cables

A-PLG-WPM30IP67-01

Field-Installation for M30 plug

Wireless Terminating Resistors

A-TRM-50-RM

50-ohm terminating resistor with RP-SMA male connector

Wireless Connector Caps

A-CAP-M30M-MIP67

Metal cap for M30 male connector

Surge Arrestors

A-SA-NFNF-01

N-type (female) to N-type (female) surge arrester

© Moxa Inc. All rights reserved. Updated Jan 23, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.