

# IEX-402 系列

## 工業網管型 VDSL2/SHDSL 乙太網路延伸器



### 特色與優點

- 自動 CO/CPE 協商可減少配置時間
- Link Fault Pass-Through (LFPT) 支援 Turbo Ring 和 Turbo Chain 並且可與其互通
- LED 指示燈可簡化故障排除步驟
- 透過網頁瀏覽器、Telnet/串列主控台、Windows 公用程式、ABC-01和 MXview 輕鬆進行網路管理

### 認證



EN 50121-4



### 簡介

IEX-402 系列是配備一個 10/100BaseT(X) 和一個 DSL 埠的入門級工業網管型乙太網路延伸器。乙太網路延伸器可根據 G.SHDSL 或是 VDSL2 標準在銅製絞線提供點對點延伸。裝置支援高達 15.3 Mbps 的資料速率以及高達 8 公里的長傳輸距離以進行 G.SHDSL 連線；對於 VDSL2 連線，資料速率可支援高達 100 Mbps 以及高達 3 公里的長傳輸距離。

IEX-402 系列適用於嚴苛的環境。DIN 導軌安裝、寬操作溫度範圍 ( -40 到 75°C ) 以及雙電源輸入使其非常適合工業應用的安裝。

為簡化配置，IEX-402 使用了 CO/CPE 自動協商。根據原廠預設值，裝置會自動將 CPE 狀態指派給每對 IEX 裝置中的其中一個。此外，Link Fault Pass-through (LFP) 和網路備援互通性可提升通訊網路的可靠性和存取性。此外，透過 Mxview 的進階管理和監控功能 ( 包括虛擬面板 )，可改善使用者在快速故障排除的體驗。

### 附加特色與優點

- 標準 G.SHDSL 資料速率高達 5.7 Mbps，以及高達 8 公里傳輸距離 ( 效能會因纜線品質而有所不同 )
- Moxa 專利的 Turbo Speed 連線高達 15.3 Mbps
- 支援 Link Fault Pass-Through (LFP) 以及線路切換快速恢復
- 支援 SNMP v1/v2c/v3，適用不同層級的網路管理
- 可與 Turbo Ring 和 Turbo Chain 網路備援互通
- 支援 Modbus TCP 通訊協定以進行裝置管理與監控
- 與 EtherNet/IP 和 PROFINET 通訊協定相容以進行透通式傳輸
- IPv6 Ready

### 規格

#### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	1 Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
Combo Port, RJ-11 (RJ45 connector) or Detachable 2-Contact Terminal Block	1
Standards	IEEE 802.1p for Class of Service IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3x for flow control IEX-402-VDSL2 Series: ITU G.993.2 IEX-402-SHDSL Series: ITU-T G.991.2

## Ethernet Software Features

Management	SNMPv1/v2c/v3, Modbus TCP, Back Pressure Flow Control, DHCP Client, HTTP, LLDP, Syslog, Telnet, TFTP
MIB	MIB-II
Time Management	SNTP

## Switch Properties

MAC Table Size	1 K
Packet Buffer Size	512 kbits

## LED Interface

LED Indicators	PWR1, PWR2, FAULT, STATE, LINK/ACT, CO/CPE, 10/100 (TP port)
----------------	--

## Serial Interface

Console Port	RS-232 (Tx/D, Rx/D, GND), 10-pin RJ45 (115200, n, 8, 1)
--------------	---

## DIP Switch Configuration

Ethernet Interface	All models: CO/CPE, SNR/SPEED IEX-402-VDSL2 Series: STD/INP IEX-402-SHDSL Series: ANNEX B/ANNEX A, STD/TURBO
--------------------	--

## Power Parameters

Power Connector	2 removable 2-contact terminal block(s)
Input Voltage	12/24/48 VDC, 9.6 to 60 VDC
Input Current	IEX-402-SHDSL Series: 0.388 A @ 12 VDC, 0.196 A @ 24 VDC, 0.097 A @ 48 VDC IEX-402-VDSL2 Series: 0.34 A @ 24 VDC
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

## Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	35 x 130 x 105 mm (1.38 x 5.12 x 4.13 in)
Weight	IEX-402-SHDSL Series: 290 g (0.64 lb) IEX-402-VDSL2 Series: 275 g (0.61 lb)
Installation	DIN-rail mounting, Rack mounting (with optional kit)

## Environmental Limits

Altitude	2000 m <sup>1</sup>
Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

1. 如果您需要產品能在高海拔地區正常運作，請與 Moxa 公司聯繫。

## Standards and Certifications

Safety	UL 508
Hazardous Locations	IEX-402-VDSL2 Series: ATEX, Class I Division 2
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-8 PFMF
Traffic Control	IEX-402-VDSL2 Series: NEMA TS2
Railway	EN 50121-4
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

## MTBF

Time	IEX-402-SHDSL Series: 1,311,455 hrs IEX-402-VDSL2 Series: 1,498,312 hrs
Standards	Telcordia (Bellcore), GB

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/tw/warranty">www.moxa.com/tw/warranty</a>

## Package Contents

Device	1 x IEX-402 Series switch
Cable	1 x RJ45-to-DB9 console cable
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese

# 尺寸

單位：公釐 (英吋)

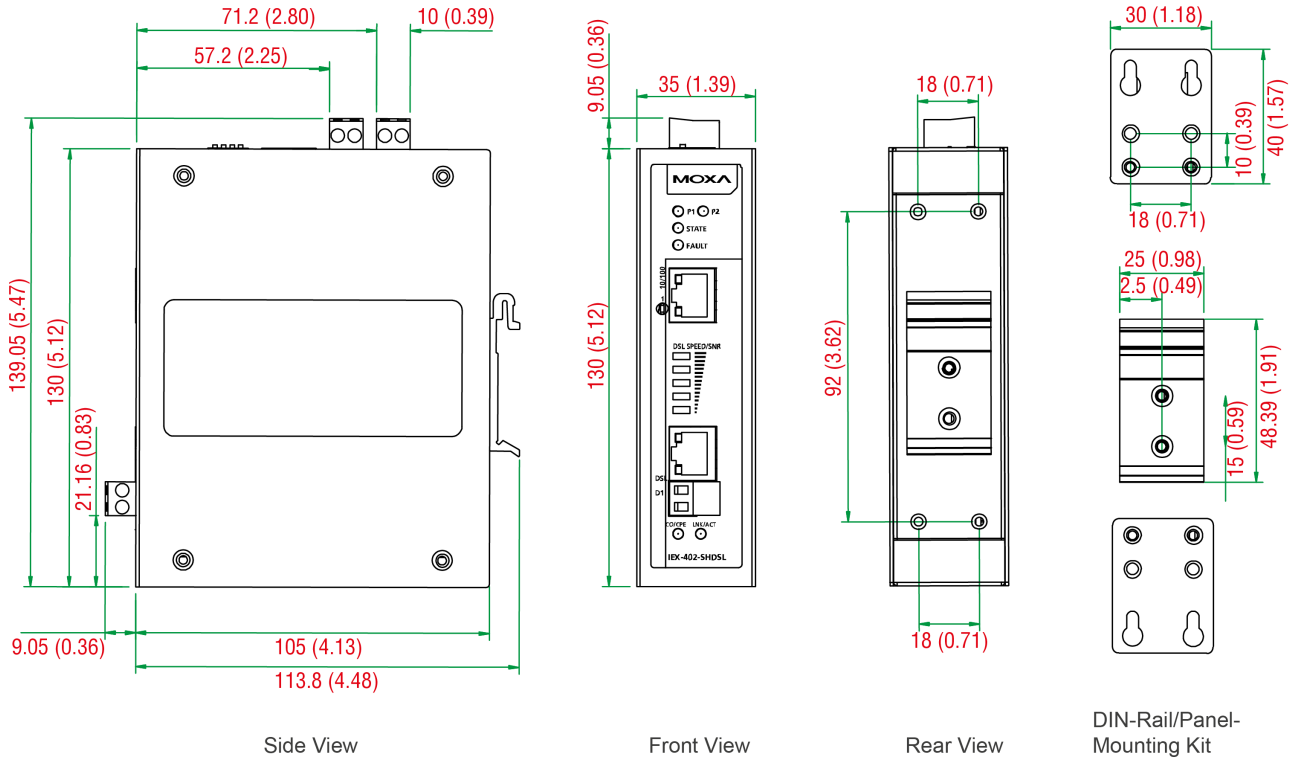

## 訂購資訊

Model Name	ITU G.993.2 for very high speed digital subscriber line transceivers	ITU-T G.991.2 for single-pair high-speed digital subscriber line (G.SHDSL) transceivers	10/100BaseT(X) Ports RJ45 Connector	Combo Port, RJ-11 (RJ45 connector) or detachable 2-contact terminal	Operating Temp.
IEX-402-VDSL2	P	-	1	1	-10 to 60°C
IEX-402-VDSL2-T	P	-	1	1	-40 to 75°C
IEX-402-SHDSL	-	P	1	1	-10 to 60°C
IEX-402-SHDSL-T	-	P	1	1	-40 to 75°C

## 配件 (選購)

### Storage Kits

ABC-01	Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature
--------	--

### Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

## Wall-Mounting Kits

WK-30	Wall-mounting kit, 2 plates, 4 screws, 40 x 30 x 1 mm
-------	---

## Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

## Software

MXview-50	Industrial network management software with a license for 50 nodes (by IP address)
MXview-100	Industrial network management software with a license for 100 nodes (by IP address)
MXview-250	Industrial network management software with a license for 250 nodes (by IP address)
MXview-500	Industrial network management software with a license for 500 nodes (by IP address)
MXview-1000	Industrial network management software with a license for 1000 nodes (by IP address)
MXview-2000	Industrial network management software with a license for 2000 nodes (by IP address)
MXview Upgrade-50	License expansion of MXview industrial network management software by 50 nodes (by IP address)

© Moxa Inc. 版權所有.2019 年 8 月 2 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。