

Product Discontinuance Notification—PDN# 0000445504

June 24, 2026

Dear Valued Customer,

We would like to inform you that the NPort 6000 and CN2500/CN2600 will reach its End of Life (EoL) phase, starting May 01, 2026.

This transition is driven by two critical priorities:

1. **Futureproof Cybersecurity Resilience:** As global security standards intensify, legacy hardware faces inherent limitations in addressing modern cyberthreats. The NPort 6000-G2 is IEC 62443-4-2 SL2 certified, providing the robust, hardware-level security required for today's mission critical networks and performance that's ready for future upgrades.

2. **Long-term Supply Sustainability:** To uphold our commitment to long-term availability, we are migrating to new G2 platforms with more sustainable component life cycles. This move mitigates the risks associated with aging key components and ensures a stable supply for your future expansions.

If you need any of these products for an existing project, please contact your Moxa sales representative to place orders by the last-buy date of March 31, 2027. The last shipment date is September 30, 2027. Please note that last-buy orders may be subject to product availability.

The End of Service (EoS) date will be March 31, 2033. Following this date, all support services—including technical assistance, new software upgrades, and new security fixes—will no longer be available. Hardware warranty, repair, and replacement services remain subject to the standard warranty policy for these products.

Please review the details below to determine how these discontinuances will affect your products and/or operations.

Which products will be EoL?

The following products will be EoL. Also, see the models recommended to replace the soon to-be-EoL models, as well as when the replacement models will be available for order.

EOL	Recommended Replacement	Available for Order
NPort 6150	NPort 6150-G2	Available now
NPort 6250	NPort 6250-G2	

NPort 6250-S-SC	NPort 6450-2S-SC-G2 or NPort 6250-G2 + IMC-21A-S-SC	
NPort 6250-M-SC	NPort 6450-2M-SC-G2 or NPort 6250-G2 + IMC-21A-M-SC	
NPort 6450	NPort 6450-G2	
NPort 6450 + NM Series	NPort 6450-2TX-G2 or NPort 6450-2M-SC-G2-T/2S-SC-G2-T	
NPort 6610-8/16/32	NPort 6610-8/16/32-G2	
NPort 6610-8/16/32-48V	NPort 6650-8/16/32-48V-G2	
NPort 6650-8/16/32	NPort 6650-8/16/32-G2	
NPort 6650-8/16/32-48V	NPort 6650-8/16/32-48V-G2	
CN2610-8/16	NPort 6610-8/16/32-G2	
CN2610-8/16-2AC	NPort 6610-8/16/32-2AC-G2	
CN2650-8/16	NPort 6650-8/16/32-G2	
CN2650-8/16-2AC	NPort 6650-8/16/32-2AC-G2	
CN2650I-8/16	NPort 6650I-8/16/32-G2	
CN2650I-8/16-2AC	NPort 6650I-8/16/32-2AC-G2	
CN2510-8/16	NPort 6610-8/16/32-G2	
CN2510-8/16-48V	NPort 6650-8/16/32-48V-G2	
NPort 6650-8/16/32-HV-T	-HV planned in NPort 5000-G2 Series	By March 31, 2027
CN2650I-8/16-HV-T		


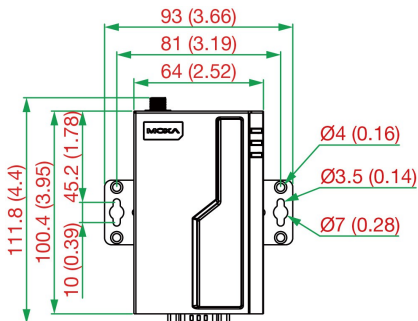
The existing NM Series network module that applies to NPort 6400/6600 Series will also be replaced by the NM-G2 Series with changes, and it will only support the NPort 6600-G2 Series

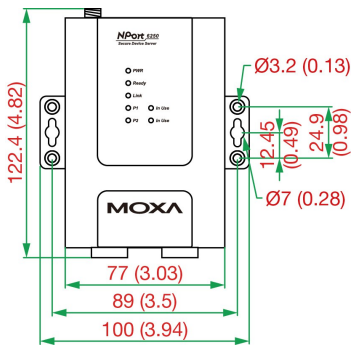
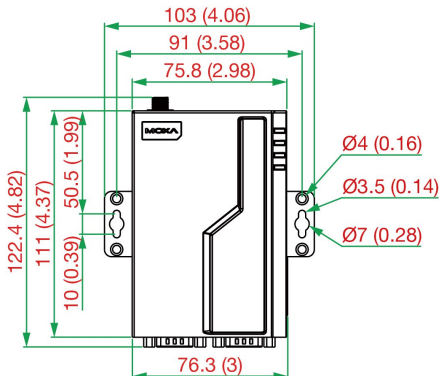
because of size consideration.

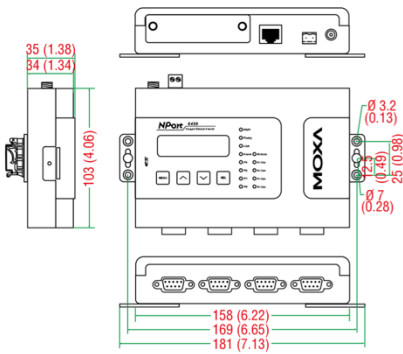
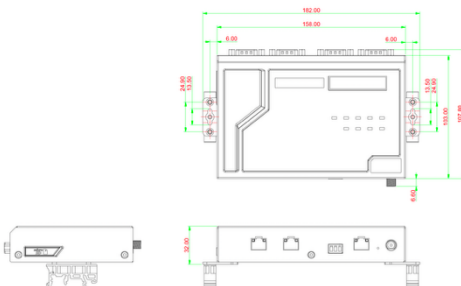
Discontinued Product	Recommended Replacement	Available for Order
NM-TX01 & NM-TX02	NM-TX02-G2 or NM-SFP02-G2-T	Available now
NM-FX01-M-SC & NM-FX02-M-SC	NM-FX02-M-SC-G2 or NM-SFP02-G2-T	
NM-FX01-S-SC & NM-FX02-S-SC	NM-FX02-S-SC-G2 or NM-SFP02-G2-T	

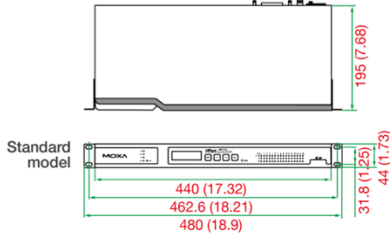
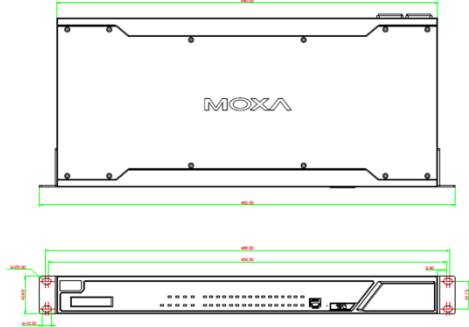
Applicable differences in specifications

In this table, we list the differences in specifications between the EoL products and the recommended replacement products.

Specification	NPort 6150 (EoL)	NPort 6150-G2 (Replacement)
Dimensions (with ears)	90 x 111.8 x 29 mm 	93 x 111.8 x 25 mm 

Specification	NPort 6250 (EoL)	NPort 6250-G2 (Replacement)
Dimensions (with ears)	100 x 122.4 x 29 mm  Front view dimensions: 122.4 (4.82) mm height, 77 (3.03) mm width, 89 (3.5) mm width, 100 (3.94) mm width. Mounting hole dimensions: Ø3.2 (0.13) mm, 12.45 (0.49) mm, 24.9 (0.98) mm, Ø7 (0.28) mm.	103 x 122.4 x 25 mm  Front view dimensions: 122.4 (4.82) mm height, 111 (4.37) mm height, 10 (0.39) mm height, 76.3 (3) mm width. Mounting hole dimensions: Ø4 (0.16) mm, Ø3.5 (0.14) mm, Ø7 (0.28) mm. Other dimensions: 103 (4.06) mm, 91 (3.58) mm, 75.8 (2.98) mm, 50.5 (1.99) mm.

Specification	NPort 6450 (EoL)	NPort 6450-G2 (Replacement)
Dimensions (with ears)	120 x 181 x 35 mm Unit: mm (inch)  Front view dimensions: 158 (6.22) mm, 169 (6.65) mm, 181 (7.13) mm. Mounting hole dimensions: Ø3.2 (0.13) mm, Ø7 (0.28) mm, 25 (0.98) mm. Other dimensions: 35 (1.38) mm, 34 (1.34) mm, 103 (4.06) mm.	114.4 x 182 x 32 mm  Front view dimensions: 182 (7.17) mm, 114.4 (4.5) mm. Mounting hole dimensions: Ø3.2 (0.13) mm, Ø7 (0.28) mm, 25 (0.98) mm. Other dimensions: 158 (6.22) mm, 169 (6.65) mm, 181 (7.13) mm, 35 (1.38) mm, 34 (1.34) mm, 103 (4.06) mm.

Specification	NPort 6600-8/16/32 (EoL)	NPort 6600-8/16/32-G2 (Replacement)
Dimensions (with ears)	200 x 480 x 44 mm  Standard model 440 (17.32) 462.6 (18.21) 480 (18.9) 195 (7.68) 44 (1.73) 31.8 (1.25)	200 x 480 x 43.65 mm 

For a more detailed migration guide, including product installation, software migration guide, and product hardening guide for a guided transition toward the next-generation G2 product, see Related Support Documents>Tech Note on the Moxa official website page:

<https://www.moxa.com/en/support/product-support/software-and-documentation/search?psid=148613>

(Scan the QR code on the right to link to the above page)



Please note that all service rules (e.g., warranty) still apply to the EoL products.

If you have any questions, please contact your regional sales representative.