

TRC-2190 Series

18-slot rackmount chassis managed media converter



Features and Benefits

- 19-inch chassis for rackmount use
- 18 slots for high-density applications
- Supports dual power inputs with redundancy
- Fanless chassis design reduces servicing costs
- SNMP/web console for easy management
- -20 to 55°C operating temperature range

Certifications



Introduction

The TRC-2190 Series provides 18 slots for media converter modules from the CSM-400 Series of Ethernet-to-fiber management modules. It also supports SNMP/web console for remote management and monitoring. A TRC-2190 chassis comes with one AC or DC power input, with an optional redundant power expansion module available for greater reliability. The TRC-2190 Series' power input module supports a fanless chassis design, as well as a -20 to 55°C operating temperature range.

Specifications

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	2
---------------------------------------	---

Ethernet Software Features

Industrial Protocols	SNMPv1/v2c, SNMPv1/v2c Trap
Management	DHCP Client, IPv4/IPv6, SNMPv1/v2c, Syslog, TCP/IP, Telnet, TFTP, UDP, Web Console
MIB	MIB-II
Security	HTTPS/SSL, Local Account Accessibility, TACACS+, RADIUS, SSH
Time Management	NTP Client

Security Functions

Authentication	Local database (password only) RADIUS TACACS+
Encryption	HTTPS, AES-128, AES-256, RSA-1024, SHA-1, SHA-256, SHA-384
Security Protocols	SNMPv3 SSHv2 HTTPS (TLS 1.2)

Power Parameters

Input Voltage	TRC-2190-AC: 110 to 240 VAC TRC-2190-DC-48V: 48 VDC
No. of Power Inputs	2
Overload Current Protection	Supported
Power Consumption	TRC-2190-AC: 1.5 A @ 100 to 240 VAC TRC-2190-DC-48V: 3.2 A @ 48 VDC

Physical Characteristics

IP Rating	IP30
Dimensions	440 x 260 x 77 mm (18.6 x 11 x 3.3 in)
Weight	5.2 g (11.4 lb)
Installation	19-inch rack mounting

Environmental Limits

Operating Temperature	-20 to 55°C (-4 to 131°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV(AC), 1 kV(DC); Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-14 IEC 60068-2-2 IEC 60068-2-3
Safety	UL 62368-1, IEC 62368-1
Vibration	IEC 60068-2-6

MTBF

Time	1,055,112 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x TRC-2190 Series converter
Documentation	1 x quick installation guide 1 x warranty card
Note	This product requires additional modules (sold separately) to function.

Dimensions

Unit: mm (inch)

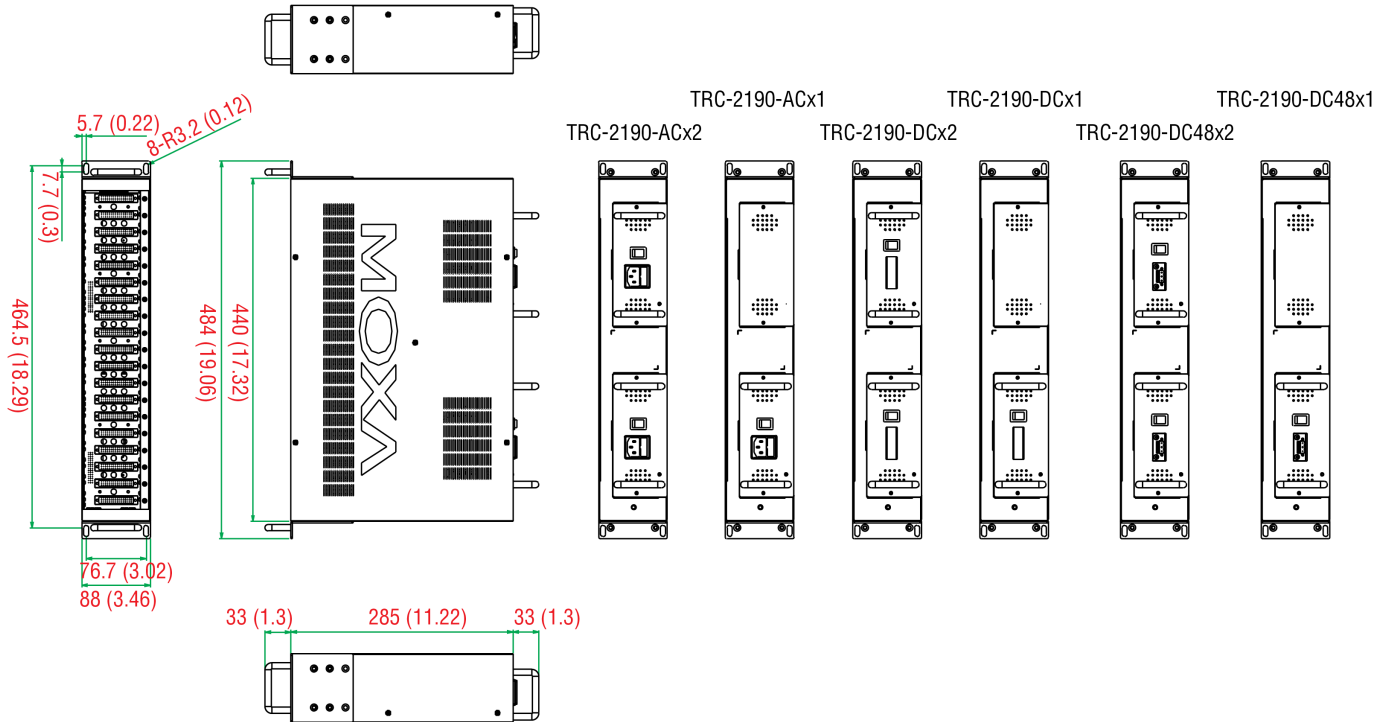

Ordering Information

Model Name	Input Voltage
TRC-2190-AC	100-240 VAC (47-63 Hz)
TRC-2190-DC-48V	48 VDC

Accessories (sold separately)

Brackets

Plate-1	Chassis converter bracket accessory package, 9 brackets, 9 screws (FMS M3 X 6 mm)
BKT-PWR	Chassis converter rackmount kit accessory package, 2 L-shaped metal plates, 8 screws (FMS M4 x 6 mm)

Communication Modules

CSM-400-1213	10/100BaseT(X)-to-100BaseFX slide-in management module converter with ST connector, multi-mode, 0 to 55°C operating temperature
CSM-400-1213-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, multi-mode ST connector, -40 to 75°C operating temperature
CSM-400-1214	10/100BaseT(X) to 100BaseFX slide-in management module converter, multi-mode SC connector, -20 to 55°C operating temperature
CSM-400-1214-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, multi-mode SC connector, -40 to 75°C operating temperature

CSM-400-1218	10/100BaseT(X) to 100BaseFX slide-in management module converter, single-mode SC connector, -20 to 55°C operating temperature
CSM-400-1218-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, single-mode SC connector, -40 to 75°C operating temperature
CSM-400-1224	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-A single-mode SC connector, -20 to 55°C operating temperature
CSM-400-1224-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-A single-mode SC connector, -40 to 75°C operating temperature
CSM-400-1225	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-B single-mode SC connector, -20 to 55°C operating temperature
CSM-400-1225-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-B single-mode SC connector, -40 to 75°C operating temperature

Power Cords

PWC-C13AU-3B-183	Power cord with AU plug, 1.83 m
PWC-C13CN-3B-183	Power cord with three-prong CN plug, 1.83 m
PWC-C13EU-3B-183	Power cord with EU plug, 1.83 m
PWC-C13JP-3B-183	Power cord with JP plug plug, 7A/125V, 1.83 m
PWC-C13UK-3B-183	Power cord with UK plug, 1.83 m
PWC-C13US-3B-183	Power cord with US plug, 1.83 m

Power Supplies

PWR-2190-AC	110 to 240 VAC power supply for the TRC-2190-AC
PWR-2190-DC-48V	36 to 53 VDC power supply for the TRC-2190-DC-48
ME-10-T	1-slot chassis with redundant 12 to 48 VDC power inputs

© Moxa Inc. All rights reserved. Updated Jul 28, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.