

RKS-G4028シリーズ

28Gポート（802.3bt PoEオプション付き）フルギガビットモジュラーマネージド・イーサネット・スイッチ



機能と特長

- ・ファストイーサネットからフルギガビット産業ネットワーク（最大28ギガビットポート）まで、幅広い要求に対応
- ・柔軟なコネクタタイプの組み合わせを可能にするモジュラーインターフェース
- ・ポートあたり最大90Wの出力を実現するIEEE 802.3bt PoEをサポート
- ・IEC 61850-3およびIEEE 1613に準拠した高いEMC耐性
- ・高精度な時間同期を実現するハードウェアベースのIEEE 1588 PTP
- ・Turbo RingとTurbo Chain（回復時間 < 20 ミリ秒 @ 250 スイッチ）¹ ネットワーク冗長性のためのSTP/RSTP/MSTP
- ・動作温度範囲-40～75°C
- ・簡単で視覚化された産業用ネットワーク管理を行うためのMXstudioに対応
- ・IEC 62443-4-1に従って開発され、IEC 62443-4-2産業サイバーセキュリティ規格に準拠

認証



製品紹介

RKS-G4028シリーズは、変電所自動化システム(IEC 61850-3、IEEE 1613)、鉄道アプリケーション(EN 50121-4)、工場自動化システムなど、産業およびビジネスのミッションクリティカルなアプリケーションの厳しい要求を満たすように設計されています。RKS-G4028シリーズのギガビットおよび高速イーサネットバックボーン、冗長リング、24 VDC、48 VDC、または110/220 VDC/VACデュアル絶縁冗長電源により、通信の信頼性が向上するとともに、配線にかかるコストを削減できます。

また、RKS-G4028のモジュール設計により、ネットワーク計画が容易にできるようになり、そしてさまざまなコネクタタイプを備える最大28のギガビットポートを設置できるようになることで、柔軟性が向上します。

その他の機能とメリット

- ・ネットワーク間でデータと情報を移動するレイヤー3スイッチング機能(L3モデルのみ)
- ・IEEEネットワーク時間同期のためのIEEE 1588v2 PTP (Precision Time Protocol)
- ・主なマネージド機能をすばやく設定するためのコマンドラインインターフェース (CLI)
- ・マルチキャストトラフィックをフィルタリングするIGMPスヌーピングおよびGMRP
- ・ポートベースのVLAN、IEEE 802.1Q VLAN、GVRPでネットワークプランニングを簡素化
- ・可用性を向上させるQoS (IEEE 802.1p/1QおよびTOS/DiffServ)
- ・最適な帯域幅利用のIEEE 802.3ad、LACP
- ・ラインスワップ高速リカバリ
- ・TACACS+、IEEE 802.1x、SNMPv3、HTTPS、およびSSHで、ネットワークセキュリティを強化
- ・異なるレベルのネットワーク管理を実現するSNMPv1/v2c/v3
- ・プロアクティブで効率の高いネットワーク監視のためのRMON
- ・帯域幅管理により、許可されたMACアドレスへのアクセスを制限する「ポートロック」で、予期しないネットワークアクセスを防止
- ・オンラインデバッグ用のポートミラーリング
- ・メールとリレー出力を通じた異常検出による自動警告
- ・接続されたデバイスのIPアドレスの自動復旧
- ・Web ブラウザ、Telnet/シリアルコンソール、CLI、Windowsユーティリティ、およびABC-02またはABC-03自動バックアップコンフィギュレーターで設定可能

1. ポートリンク速度が1ギガビット以上の場合、回復時間は50ミリ秒未満で、

仕様

Input/Output Interface

Alarm Contact Channels	1 relay output with current carrying capacity of 2 A @ 24 VDC
Buttons	Reset button

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	RKS-G4028-4GT models: 4 RKS-G4028-L3-4GT models: 4
100/1000BaseSFP Slots	RKS-G4028-4GS models: 4 RKS-G4028-L3-4GS models: 4 RKS-G4028-PoE-4GS models: 4 RKS-G4028-L3-PoE-4GS models: 4
Module	<p>There are 3 module slots on the switch. Users can select different types of modules to insert into the switch. The modules that can be selected include 8-port/6-port modules with 10/100/1000BaseT(X), 10/100BaseT(X), 100/1000BaseSFP, or 100BaseFX (SC/ST connector) interfaces.</p> <p>Refer to Expansion Modules in the Accessories section for a full list of supported interface modules.</p>
Standards	IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX

Ethernet Software Features

Management	IPv4/IPv6 Note: IPv6 is available for L2 models only. Flow control Back Pressure Flow Control DHCP Server/Client Note: DHCP Server/Client is available for L2 models only. ARP RARP LLDP Linkup Delay SMTP SNMP Trap SNMP Inform SNMPv1/v2c/v3 RMON TFTP SFTP HTTP HTTPS Telnet Syslog Private MIB Fiber check DHCP Relay Agent (Option 82) Port Mirroring (SPAN, RSPAN)
Filter	GMRP GVRP GARP 802.1Q IGMP Snooping v1/v2/v3 IGMP Querier

Redundancy Protocols	<p>STP RSTP Turbo Ring v2 Turbo Chain Ring Coupling Dual-Homing MRP Link Aggregation Network Loop Protection MSTP</p>
Routing Redundancy	L3 models: VRRP
Security	<p>Broadcast storm protection Rate Limit Access control list Static port lock Sticky MAC HTTPS/SSL SSH RADIUS TACACS+ Login and password policy Secure boot MAC authentication bypass Trust access control Dynamic ARP Inspection DHCP Snooping IP Source Guard</p>
Time Management	<p>SNTP IEEE 1588v2 PTP (hardware-based) Supported power profiles: IEEE 1588 Default 2008, IEC 61850-9-3-2016, IEEE C37.238-2017 NTP Server/Client NTP Authentication</p>
Protocols	<p>IPv4/IPv6 Note: IPv6 is available for L2 models only. TCP/IP UDP ICMP ARP RARP TFTP DNS NTP Client DHCP Server Note: DHCP Server is available for L2 models only. DHCP Client Note: DHCP Client is available for L2 models only. 802.1X QoS HTTPS HTTP Telnet SMTP SNMPv1/v2c/v3 RMON Syslog</p>
Industrial Protocols	<p>EtherNet/IP Modbus TCP</p>
Unicast Routing	L3 models: OSPF, Static Route

MIB	P-BRIDGE MIB Q-BRIDGE MIB IEEE8021-SPANNING-TREE-MIB IEEE8021-PAE-MIB IEEE8023-LAG-MIB LLDP-EXT-DOT1-MIB LLDP-EXT-DOT3-MIB SNMPv2-MIB RMON MIB Groups 1, 2, 3, 9
Power Substation	MMS 1588 PTP Power Profile IEC 61850-9-3 1588 PTP Power Profile C37.238-2017

Switch Properties

IGMP Groups	1024
Jumbo Frame Size	9.216 KB
MAC Table Size	16 K
Max. No. of VLANs	256
Packet Buffer Size	1.5 MB
Priority Queues	8
VLAN ID Range	VID 1 to 4094

USB Interface

Storage Port	USB Type A
--------------	------------

MicroSD Interface

Storage Port	microSD card
--------------	--------------

LED Interface

LED Indicators	PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC, EPS
----------------	---

Serial Interface

Console Port	RS-232 (RJ45)
--------------	---------------

Power Parameters

Total PoE Power Budget	300 W
Max. PoE Power Output per Port	IEEE 802.3af: 15.4 W IEEE 802.3at: 30 W IEEE 802.3bt: 90 W
Input Voltage	RKS-G4028-LV models: 24/48 VDC RKS-G4028-2LV models: 24/48 VDC (redundant power supplies) RKS-G4028-HV models: 110/220 VAC, 110/220 VDC RKS-G4028-2HV models: 110/220 VAC, 110/220 VDC (redundant power supplies) PoE models: 48 VDC (for the PoE system)
Operating Voltage	RKS-G4028-LV/2LV models: 18 to 72 VDC RKS-G4028-HV/2HV models: 88 to 300 VDC, 85 to 264 VAC PoE models: 46 to 57 VDC (for the PoE system)
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

Input Current	<p>RKS-G4028-LV/2LV models: Max. 2.53 A @ 24 VDC Max. 1.25 A @ 48 VDC</p> <p>RKS-G4028-HV/2HV models: Max. 0.55 A @ 110 VDC Max. 0.29 A @ 220 VDC Max. 1.01 A @ 110 VAC Max. 0.62 A @ 220 VAC</p> <p>EPS (PoE models only): Max. 7.50 A @ 48 VDC</p>
Power Consumption (Max.)	<p>RKS-G4028-LV/2LV models: Max. 60.72 W @ 24 VDC Max. 60 W @ 48 VDC</p> <p>RKS-G4028-HV/2HV models: Max. 60.5 W @ 110 VDC Max. 63.8 W @ 220 VDC Max. 62.2 W @ 110 VAC Max. 64.1 W @ 220 VAC</p> <p>Note: These are the maximum power consumption ratings for the device with the maximum number of modules installed.</p>

Physical Characteristics

IP Rating	IP30
Dimensions	440 x 44 x 300 mm (17.32 x 1.37 x 11.81 in)
Weight	<p>RKS-G4028-LV/HV models: 4900 g (10.80 lb) RKS-G4028-2LV/2HV models: 5200 g (11.46 lb) RKS-G4028-PoE-LV/HV models: 5000 g (11.02 lb) RKS-G4028-PoE-2LV/2HV models: 5300 g (11.68 lb)</p>
Installation	Rack mounting

Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	<p>EN IEC 62368-1 IEC 60950-1 IEC 62368-1 UL 61010 UL 62368-1</p>
EMC	<p>EN 55032/35 EN 61000-6-2/-6-4</p>
EMI	CISPR 32, FCC Part 15B Class A
Traffic Control	NEMA TS2
EMS	<p>IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 35 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 Voltage Dips & Interruptions</p>
Power Substation	<p>IEC 61850-3 IEEE 1613</p>

Railway	EN 50121-4
Freefall	IEC 60068-2-32
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Industrial Cybersecurity	IEC 62443-4-1 IEC 62443-4-2

MTBF

Time	RKS-G4028-4GT-HV models: 572,888 hours RKS-G4028-4GT-2HV models: 518,894 hours RKS-G4028-4GS-HV models: 529,925 hours RKS-G4028-4GS-2HV models: 483,436 hours RKS-G4028-4GT-LV models: 548,589 hours RKS-G4028-4GT-2LV models: 479,574 hours RKS-G4028-4GS-LV models: 508,639 hours RKS-G4028-4GS-2LV models: 449,160 hours RKS-G4028-PoE-4GS-HV models: 508,190 hours RKS-G4028-PoE-4GS-2HV models: 465,282 hours RKS-G4028-PoE-4GS-LV models: 488,598 hours RKS-G4028-PoE-4GS-2LV models: 433,472 hours
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x RKS-G4028 Series switch
Installation Kit	2 x rack-mounting ear 4 x protective caps for unused SFP ports (for RKS-G4028-GS models only) 8 x round stickers for module screws
Documentation	1 x quick installation guide 1 x warranty card
Note	<ol style="list-style-type: none"> 1. Only the RKS-G4028-PoE Series and RKS-G4028-L3-PoE models support PoE functionality with RM-G4000-8GPoE and/or RM-G4000-8PoE modules. 2. Power over Ethernet requires the 48 VDC external power supply (46 to 57 VDC). 3. The 48 VDC external power supply, SFP modules, and modules from the RM-G4000 Module Series need to be purchased separately for use with this product.

寸法

単位: mm (インチ)

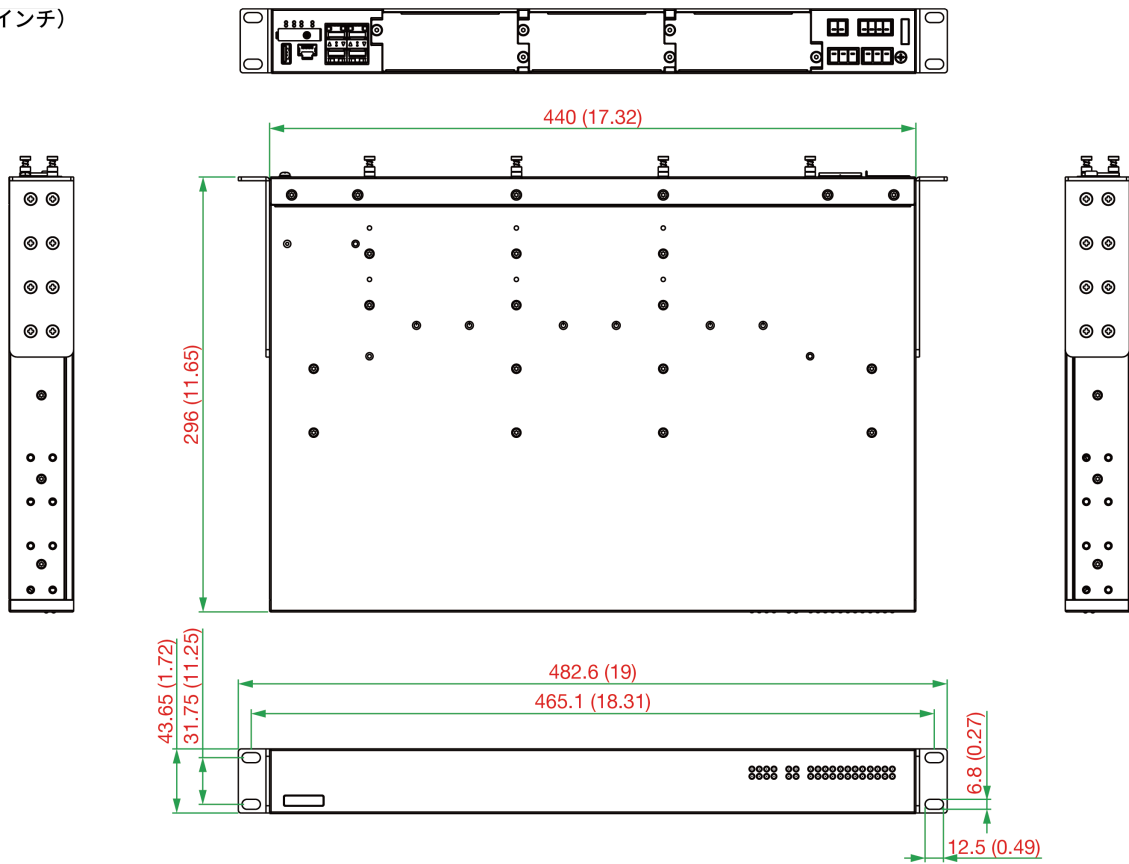

注文情報

Model Name	Max. No. of Ports	PoE Support	L3 Functionality	Input Voltage	Redundant Power Supplies	External Power Supply	Operating Temp.
RKS-G4028-4GT-HV-T	28	-	-	110/220 VAC/VDC	-	-	-40 to 75°C
RKS-G4028-4GT-2HV-T	28	-	-	110/220 VAC/VDC	P	-	-40 to 75°C
RKS-G4028-4GS-HV-T	28	-	-	110/220 VAC/VDC	-	-	-40 to 75°C
RKS-G4028-4GS-2HV-T	28	-	-	110/220 VAC/VDC	P	-	-40 to 75°C
RKS-G4028-4GT-LV-T	28	-	-	24/48 VDC	-	-	-40 to 75°C
RKS-G4028-4GT-2LV-T	28	-	-	24/48 VDC	P	-	-40 to 75°C
RKS-G4028-4GS-LV-T	28	-	-	24/48 VDC	-	-	-40 to 75°C
RKS-G4028-4GS-2LV-T	28	-	-	24/48 VDC	P	-	-40 to 75°C
RKS-G4028-L3-4GT-HV-T	28	-	P	110/220 VAC/VDC	-	-	-40 to 75°C
RKS-G4028-L3-4GT-2HV-T	28	-	P	110/220 VAC/VDC	P	-	-40 to 75°C
RKS-G4028-L3-4GS-HV-T	28	-	P	110/220 VAC/VDC	-	-	-40 to 75°C
RKS-G4028-L3-4GS-2HV-T	28	-	P	110/220 VAC/VDC	P	-	-40 to 75°C
RKS-G4028-L3-4GT-LV-T	28	-	P	24/48 VDC	-	-	-40 to 75°C

Model Name	Max. No. of Ports	PoE Support	L3 Functionality	Input Voltage	Redundant Power Supplies	External Power Supply	Operating Temp.
RKS-G4028-L3-4GT-2LV-T	28	-	P	24/48 VDC	P	-	-40 to 75°C
RKS-G4028-L3-4GS-LV-T	28	-	P	24/48 VDC	-	-	-40 to 75°C
RKS-G4028-L3-4GS-2LV-T	28	-	P	24/48 VDC	P	-	-40 to 75°C
RKS-G4028-PoE-4GS-HV-T	28	P	-	110/220 VAC/VDC	-	P	-40 to 75°C
RKS-G4028-PoE-4GS-2HV-T	28	P	-	110/220 VAC/VDC	P	P	-40 to 75°C
RKS-G4028-PoE-4GS-LV-T	28	P	-	24/48 VDC	-	P	-40 to 75°C
RKS-G4028-PoE-4GS-2LV-T	28	P	-	24/48 VDC	P	P	-40 to 75°C
RKS-G4028-L3-PoE-4GS-HV-T	28	P	P	110/220 VAC/VDC	-	P	-40 to 75°C
RKS-G4028-L3-PoE-4GS-2HV-T	28	P	P	110/220 VAC/VDC	P	P	-40 to 75°C
RKS-G4028-L3-PoE-4GS-LV-T	28	P	P	24/48 VDC	-	P	-40 to 75°C
RKS-G4028-L3-PoE-4GS-2LV-T	28	P	P	24/48 VDC	P	P	-40 to 75°C

アクセサリ（別売）

Expansion Modules

RM-G4000-8TX	Fast Ethernet module with 8 10/100BaseT(X) ports
RM-G4000-8SFP	Fast Ethernet module with 8 100BaseSFP slots
RM-G4000-8PoE	Fast Ethernet module with 8 10/100BaseT(X) IEEE 802.3bt PoE ports
RM-G4000-8GTX	Gigabit Ethernet module with 8 10/100/1000BaseT(X) ports
RM-G4000-8GSFP	Gigabit Ethernet module with 8 100/1000BaseSFP slots
RM-G4000-8GPoE	Gigabit Ethernet module with 8 10/100/1000BaseT(X) IEEE 802.3bt PoE ports
RM-G4000-6MSC	Fast Ethernet module with 6 multi-mode 100BaseFX ports with SC connectors
RM-G4000-6MST	Fast Ethernet module with 6 multi-mode 100BaseFX ports with ST connectors
RM-G4000-6SSC	Fast Ethernet module with 6 single-mode 100BaseFX ports with SC connectors
RM-G4000-4MSC2TX	Fast Ethernet module with 4 multi-mode 100BaseFX ports with SC connectors, 2 10/100BaseT(X) ports
RM-G4000-4MST2TX	Fast Ethernet module with 4 multi-mode 100BaseFX ports with ST connectors, 2 10/100BaseT(X) ports
RM-G4000-4SSC2TX	Fast Ethernet module with 4 single-mode 100BaseFX ports with SC connectors, 2 10/100BaseT(X) ports
RM-G4000-2MSC4TX	Fast Ethernet module with 2 multi-mode 100BaseFX ports with SC connectors, 4 10/100BaseT(X) ports
RM-G4000-2MST4TX	Fast Ethernet module with 2 multi-mode 100BaseFX ports with ST connectors, 4 10/100BaseT(X) ports
RM-G4000-2SSC4TX	Fast Ethernet module with 2 single-mode 100BaseFX ports with SC connectors, 4 10/100BaseT(X) ports

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
------------	---

ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature
ABC-03-microSD-T	MicroSD-based configuration backup and restoration tool, firmware upgrades, and log file storage tool for managed Ethernet switches and WLAN products, -40 to 85°C operating temperature

SFP Modules

SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXC	SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXC-120	SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHXLC	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLSXC	SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLXLC	SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GSXC	SFP module with 1 1000BaseSXC port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GZXC	SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXLC-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature

SFP-1GLSXLC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature

Cables

CN20070	10-pin RJ45 to DB9 female serial cable
---------	--

Software

MXview-100	MXview license for 100 nodes
MXview-50	MXview license for 50 nodes
MXview-250	MXview license for 250 nodes
MXview-500	MXview license for 500 nodes
MXview-1000	MXview license for 1000 nodes
MXview-2000	MXview license for 2000 nodes
MXview Upgrade-50	MXview license expansion for 50 nodes

© Moxa Inc. All rights reserved.2024年5月17日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。