


MiiNePort E2 Series

10/100 Mbps embedded pin header module serial device servers

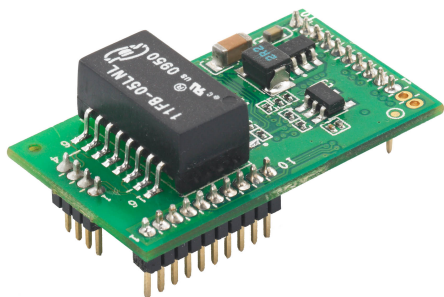

Features and Benefits

- Smallest embedded device server available—only 29 x 17 x 12.6 mm
- Supports EZPower for 3.3 to 5 VDC system power input
- Green design with extremely low power consumption
- Uses Moxa's high-quality and reliable second-generation MiiNe SoC
- MiiNePort NetEZ technology makes integration incredibly easy
- Operation versatility with Real COM/TCP/UDP/RFC2217/MCSC

Certifications




Introduction

Moxa's MiiNePort E2 Series embedded device servers are designed for manufacturers who want to add sophisticated network connectivity to their serial devices with minimal integration effort. The MiiNePort E2 is empowered by the MiiNe, Moxa's second-generation SoC, which supports 10/100 Mbps Ethernet, delivers a serial baudrate of up to 921.6 kbps, offers a versatile selection of ready-to-use operation modes, and requires a minimal amount of power. With Moxa's innovative NetEZ technology, the MiiNePort E2 can convert any device with a standard serial interface to an Ethernet-enabled device. In addition, the MiiNePort E2 is the smallest embedded device server without an RJ45 connector, making it easy to fit into virtually any existing serial device.

Moxa's Second-generation SoC

The MiiNe was created to provide manufacturers with a competitive embedded serial-to-Ethernet solution. The MiiNePort E2, which uses the MiiNe for its SoC, is one of the world's tiniest embedded device servers and has the lowest power consumption among similar products. The MiiNe's features include:

- Cost-effective serial-to-Ethernet conversions
- Arm core
- Advanced UART technology
- Internal 2 MB Flash and 4 MB SDRAM memory

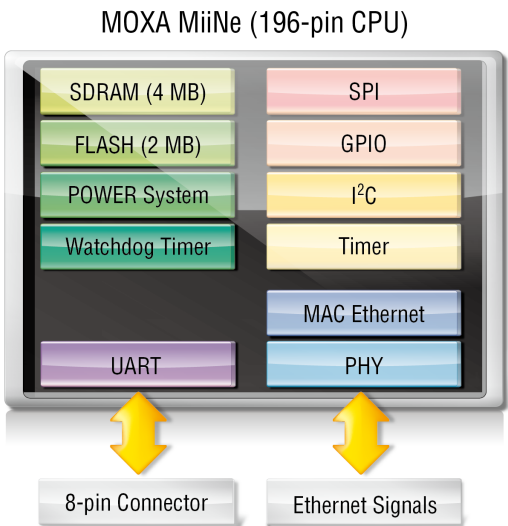

Specifications

Embedded System

CPU	32-bit Arm Core
Memory	
Flash	2 MB
SDRAM	4 MB

Input/Output Interface


Configurable DIO Channels (by software)	4
Ethernet Interface	
10/100BaseT(X) Ports, Auto MDI/MDI-X	4-pin pin header
Magnetic Isolation Protection	1.5 kV (built-in)
Ethernet Software Features	
Configuration Options	Web Console (HTTP) Windows Utility
Management	ARP BOOTP Device Search Utility (DSU) DHCP Client IPv4 SMTP SNMPv1 TCP/IP Telnet TFTP UDP ICMP
Windows Real COM Drivers	Windows 11, 10, 8.1, 8, 7, Vista, XP, ME, 98 and 95 Windows Server 2022, 2019, 2016, 2012 R2, 2012, 2008 R2, 2008, 2003, 2000 and NT Windows Embedded CE 5.0 and 6.0, Windows XP Embedded
Linux Real TTY Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x and 2.4.x
Fixed TTY Drivers	macOS versions: 14, 13, 12, 11 and 10.1x SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X
Virtual Machine	VMWare ESXi (Windows 11 / 10) VMware Fusion (Windows on macOS 14, 13, 12, 11 and 10.1x) Parallels Desktop (Windows on macOS 14, 13, 12, 11 and 10.1x)
Arm®-based Platform Support	Windows 11 Linux Kernel 6.x, 5.x and 4.x macOS 14, 13, 12 and 11
Android API	Android 3.1.x and later
Serial Interface	
No. of Ports	1
Serial Standards	TTL
Operation Modes	MiiNePort E2 Series: Real COM mode, RFC2217 mode, TCP Client mode, TCP Server mode, UDP mode, Ethernet Modem mode, MCSC mode MiiNePort E2-SDK: Real COM mode, Ethernet Modem mode
Baudrate	MiiNePort E2 Series: 50 bps to 230.4 kbps MiiNePort E2-H/-SDK Series: 50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2

Parity	None Even Odd Space Mark
Flow Control	None RTS/CTS DTR/DSR XON/XOFF
Serial Signals	
TTL	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RST (reset circuit), GND
NetEZ Technology	
NetEZ Functions	EZPower EZPage SCM (Serial Command Mode) AutoCFG MCSC (Multi-Channel Serial Communication)
Serial Software Features	
Serial to Ethernet Sample Source Code	MiiNePort E2-SDK (Integrated in MiiNePort-IDE): 1. TCP Server Echo 2. TCP Server to Serial (Single connection) 3. TCP Server to Serial (Multi-connection) 4. TCP Client Echo 5. TCP Client to Serial (Startup) 6. TCP Client to Serial (Any character) 7. TCP Client to Serial (Designed destination TCP/IP port from serial) 8. UDP Echo 9. UDP to Serial
Power Parameters	
Input Current	157 mA @ 3.3 VDC
Input Voltage	3.3 to 5 VDC
Physical Characteristics	
Dimensions	MiiNePort E2/E2-H/E2-SDK Series: 29 x 17 x 12.6 mm (1.14 x 0.67 x 0.50 in)
Weight	MiiNePort E2/E2-H Series: 5 g (0.01 lb) MiiNePort E2-ST/E2-H-ST/E2-SDK: 77 g (0.17 lb)
Form Factor Type	Drop-in modules
Environmental Limits	
Operating Temperature	Standard Models: 0 to 55°C (32 to 131°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 60°C (-40 to 140°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF

	IEC 61000-4-11
Environmental Testing	IEC 60068-2-1 IEC 60068-2-3
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Declaration	
Green Product	RoHS, CRoHS, WEEE
MTBF	
Time	5,696,350 hrs
Standards	Telcordia Standard SR-332
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/warranty
Package Contents	
Device	1 x MiiNePort E2 Series device server
Cable	1 x Ethernet, crossover cable (-ST/-SDK models) 1 x null modem serial cable (-ST/-SDK models) 1 x USB cable (-SDK model)
Power Supply	1 x power adapter, universal (-ST/-SDK models) 1 x power cord, EU type (-ST/-SDK models) 1 x power cord, US type (-ST/-SDK models)
Documentation	1 x quick installation guide (-ST/-SDK models) 1 x warranty card (-ST/-SDK models)

Dimensions

Unit: mm (inch)

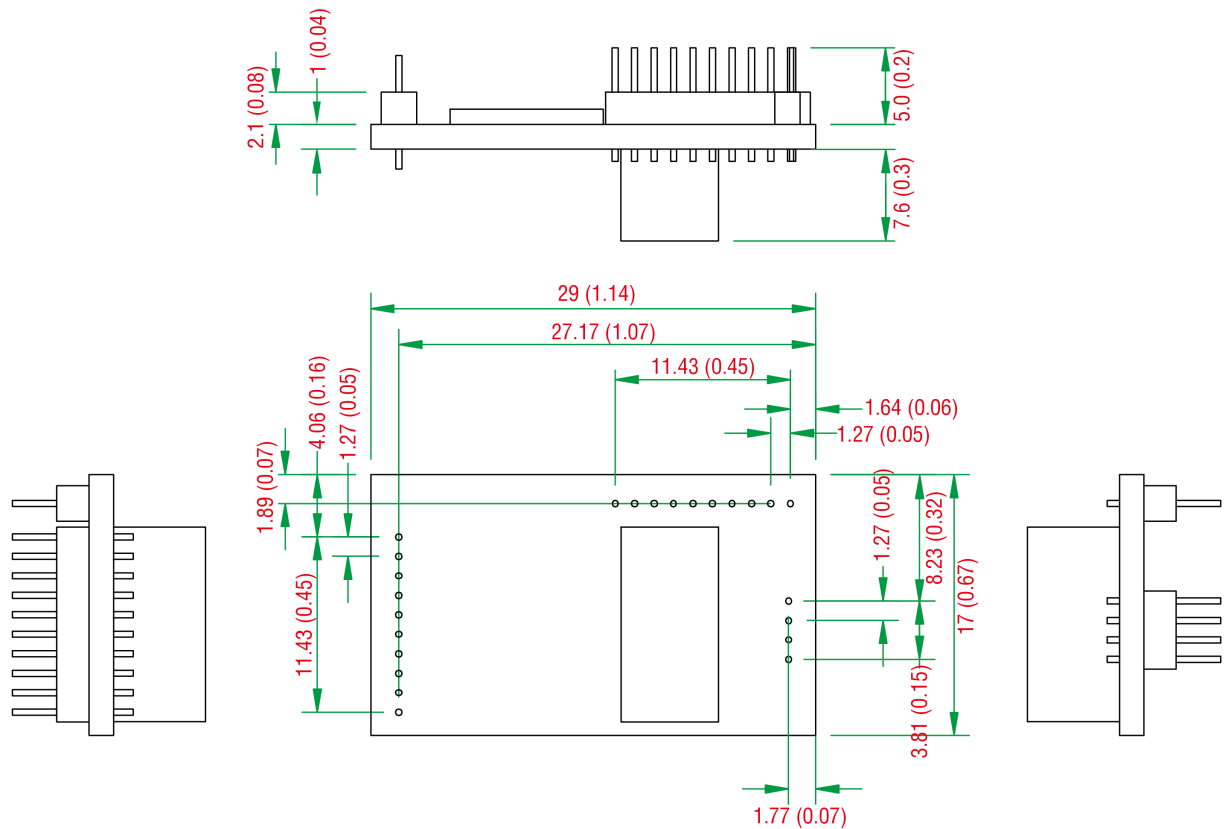

Ordering Information

Model Name	No. of Serial Ports	Supported Baudrates	Operating Temp.	With Evaluation Board	With Software Development Kit
MiiNePort E2	1	50 bps to 230.4 kbps	0 to 55°C	–	–
MiiNePort E2-H	1	50 bps to 921.6 kbps	0 to 55°C	–	–
MiiNePort E2-T	1	50 bps to 230.4 kbps	-40 to 85°C	–	–
MiiNePort E2-H-T	1	50 bps to 921.6 kbps	-40 to 85°C	–	–
MiiNePort E2-ST	1	50 bps to 230.4 kbps	0 to 55°C	✓	–
MiiNePort E2-H-ST	1	50 bps to 921.6 kbps	0 to 55°C	✓	–
MiiNePort E2-SDK	1	50 bps to 921.6 kbps	0 to 55°C	✓	✓

© Moxa Inc. All rights reserved. Updated Sep 21, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.