

# TN Series Managed Ethernet Switch User Manual

---

**Version 2.7, January 2024**

[www.moxa.com/products](http://www.moxa.com/products)

**Models covered by this user's manual**

**TN-4500A Series**

**TN-5500A Series**

**MOXA®**

© 2024 Moxa Inc. All rights reserved.

# TN Series Managed Ethernet Switch User Manual

The software described in this manual is furnished under a license agreement and may be used only in accordance with the terms of that agreement.

## Copyright Notice

© 2024 Moxa Inc. All rights reserved.

## Trademarks

The MOXA logo is a registered trademark of Moxa Inc.  
All other trademarks or registered marks in this manual belong to their respective manufacturers.

## Disclaimer

- Information in this document is subject to change without notice and does not represent a commitment on the part of Moxa.
- Moxa provides this document as is, without warranty of any kind, either expressed or implied, including, but not limited to, its particular purpose. Moxa reserves the right to make improvements and/or changes to this manual, or to the products and/or the programs described in this manual, at any time.
- Information provided in this manual is intended to be accurate and reliable. However, Moxa assumes no responsibility for its use, or for any infringements on the rights of third parties that may result from its use.
- This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

## Technical Support Contact Information

[www.moxa.com/support](http://www.moxa.com/support)

# Table of Contents

<b>1. About this Manual</b>	<b>5</b>
<b>2. Getting Started</b>	<b>6</b>
Serial Console Configuration (115200, None, 8, 1, VT100)	6
Configuration by Telnet Console	8
Configuration by Web Browser	10
Disabling Telnet and Browser Access	12
<b>3. Featured Functions</b>	<b>13</b>
Configuring Basic Settings	13
System Identification	13
Password (User Account)	15
Password Login Policy	17
Accessible IP List	17
Port Settings	18
Network Parameters	19
GARP Timer Parameters	21
System Time Settings	22
System File Update	23
Security	27
Restart	34
Reset to Factory Default	35
Loop Protection	35
Using Port Trunking	35
The Port Trunking Concept	36
Port Trunking Settings	36
Configuring SNMP	38
SNMP Read/Write Settings	39
Trap Settings	39
Private MIB Information	40
Using PoE (PoE Models Only)	41
Type 1	41
Type 2	44
Type 3	54
Using Traffic Prioritization	62
The Traffic Prioritization Concept	63
Configuring Traffic Prioritization	65
Using Virtual LAN	69
The Virtual LAN (VLAN) Concept	69
Sample Applications of VLANs Using Moxa Switches	71
Configuring Virtual LAN	72
Q in Q Setting	74
VLAN Table	75
Using Multicast Filtering	75
The Concept of Multicast Filtering	75
Configuring IGMP Snooping	79
Current Active IGMP Streams	81
Static Multicast MAC Addresses	82
Configuring GMRP	83
GMRP Table	83
Multicast Filtering Behavior	84
Using Bandwidth Management	84
Configuring Bandwidth Management	84
Using Auto Warning	88
Configuring Email Warning	88
Configuring Relay Warning	91
Event Log Settings	92
Using Line-Swap-Fast-Recovery	93
Configuring Line-Swap Fast Recovery	93
DNS Server	93

Using Set Device IP.....	94
Configuring Set Device IP (Type 1).....	96
Configuring Set Device IP (Type2).....	97
Configuring DHCP Relay Agent.....	98
Configuring DHCP Filter.....	99
Using Diagnosis.....	100
Mirror Port.....	100
Ping.....	101
LLDP Function.....	101
Using Monitor.....	102
Monitor by Switch.....	102
Monitor by Port.....	103
Using the MAC Address Table.....	103
Using Access Control List.....	104
The ACL Concept.....	104
Access Control List Configuration and Setup.....	105
Using Event Log.....	109
Using Syslog.....	111
Using HTTPS/SSL.....	111
<b>A. MIB Groups.....</b>	<b>113</b>

# 1. About this Manual

---

Thank you for purchasing a Moxa managed Ethernet switch. Read this user's manual to learn how to connect your Moxa switch to Ethernet-enabled devices used for industrial applications.

The following two chapters are covered in this user manual:

- **Getting Started**

This chapter explains how the initial installation process for Moxa switch. There are three ways to access Moxa switch's configuration settings: the serial console, Telnet console, and web console.

- **Featured Functions**

This chapter explains how to access Moxa switch's various configuration, monitoring, and administration functions. These functions can be accessed by serial, Telnet, or web console. The web console is the most user-friendly way to configure Moxa switch. In this chapter, we use the web console interface to introduce the functions.

## 2. Getting Started

In this chapter we explain how to install a Moxa switch for the first time. There are three ways to access the Moxa switch's configuration settings: serial console, Telnet console, or web console. If you do not know the Moxa switch's IP address, you can open the serial console by connecting the Moxa switch to a PC's COM port with a short serial cable. You can open the Telnet or web console over an Ethernet LAN or over the Internet.

### Serial Console Configuration (115200, None, 8, 1, VT100)



#### NOTE

- You cannot connect to the serial and Telnet console at the same time.
- You can connect to the web console and another console (serial or Telnet) at the same time. However, we strongly recommend that you do NOT do so. Following this advice will allow you to maintain better control over the Moxa switch's configuration.




#### NOTE

We recommend **using PComm Terminal Emulator** when opening the serial console. This software can be downloaded free of charge from the Moxa website.


Before running PComm Terminal Emulator, use an RJ45 to DB9-F (or RJ45 to DB25-F) cable to connect the Moxa switch's console port to your PC's COM port (generally COM1 or COM2, depending on how your system is set up).

After installing PComm Terminal Emulator, open the Moxa switch's serial console as follows:


1. From the Windows desktop, click **Start > Programs > PComm Lite 1.3 > Terminal Emulator**.

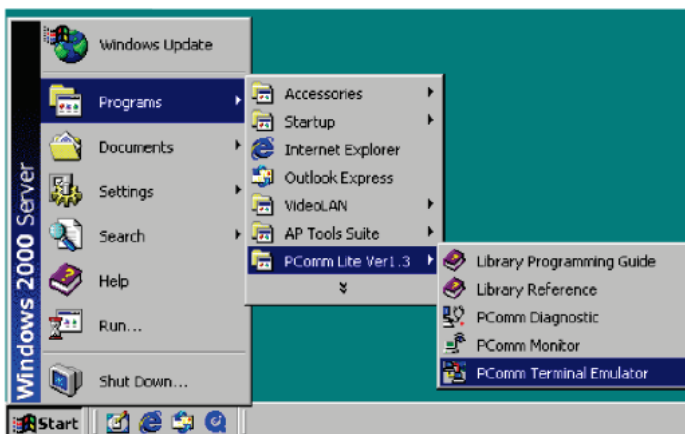


2. Select **Open** under the **Port Manager** menu to open a new connection.

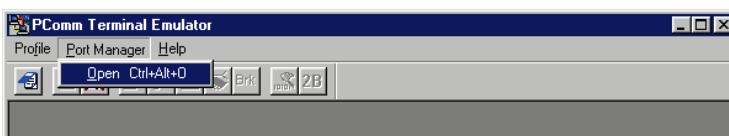

- The **Property** window should open. On the **Communication Parameter** tab for **Ports**, select the COM port that is being used for the console connection. Set the other fields as follows: **115200** for **Baud Rate**, **8** for **Data Bits**, **None** for **Parity**, and **1** for **Stop Bits**.

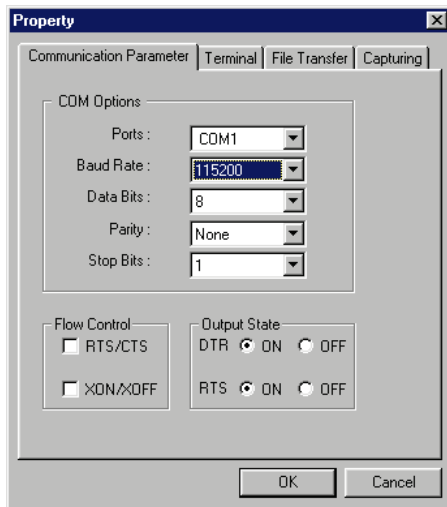

- On the **Terminal** tab, select **VT100** for **Terminal Type**, and then click **OK** to continue.

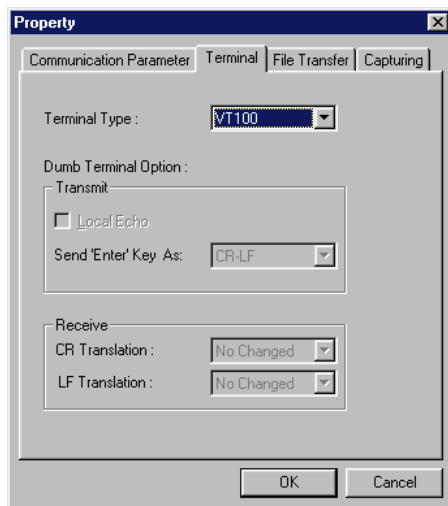

- In the terminal window, the Moxa switch will prompt you to select a terminal type. Enter **1** to select **ansi/vt100** and then press **Enter**.

```
MOXA ToughNet Switch TN-4516A-12POE-4GPOE-T
Console terminal type (1: ansi/vt100, 2: vt52) : 1_
```

- The serial console will prompt you to log in. Press **Enter** and select **admin** or **user**. Use the down arrow key on your keyboard to select the **Password** field and enter a password if desired. This password will be required to access any of the consoles (web, serial, Telnet). If you do not wish to create a password, leave the **Password** field blank and press **Enter**.

```
Model : TN-4516A-12POE-4GPOE-T
Name : Managed Redundant Switch 02135
Location : Switch Location
```

```
Firmware Version : V3.3 build 16012111
Serial No : 02135
IP : 192.168.127.253
MAC Address : 00-90-E8-1F-C8-0A
```

```
+-----+
| Account : admin |
| Password :      |
+-----+
```

7. The **Main Menu** of the Moxa switch's serial console should appear. (In PComm Terminal Emulator, you can adjust the font by selecting **Font...** from the **Edit** menu.)

```

TN-4516A series V3.3 build 16012111
-----
1. Basic Settings          - Basic settings for network and system parameter.
2. Port Trunking          - Allows multiple ports to be aggregated as a link.
3. SNMP Settings         - The settings for SNMP.
4. Comm. Redundancy       - Establish Ethernet communication redundant path.
5. Traffic Prioritization- Prioritize Ethernet traffic to help determinism.
6. Virtual LAN            - Set up a VLAN by IEEE802.1Q VLAN or Port-based VLAN.
7. Multicast Filtering    - Enable the multicast filtering capability.
8. Bandwidth Management  - Restrict unpredictable network traffic.
9. Port Access Control    - Port access control by IEEE802.1X or Static Port Lock.
  a. Auto Warning         - Warning email and/or relay output by events.
  b. Line Swap            - Fast recovery after moving devices to different ports.
  c. Set Device IP        - Assign IP addresses to connected devices.
  d. Diagnosis            - Ping command and the settings for Mirror port, LLDP.
  e. Monitor              - Monitor a port and network status.
  f. MAC Address Table    - The complete table of Ethernet MAC Address List.
  g. System log           - The settings for Syslog and Event log.
  h. Exit                 - Exit
                          - Use the up/down arrow keys to select a category,
                          and then press Enter to select. -

```

8. Use the following keys on your keyboard to navigate the Moxa switch's serial console:

Key	Function
Up, down, right, left arrow keys, Tab	Move the onscreen cursor
Enter	Display and select options
Space	Toggle options
Esc	Previous menu

## Configuration by Telnet Console

Opening the Moxa switch's Telnet or web console over a network requires that the PC host and Moxa switch are on the same logical subnet. You may need to adjust your PC host's IP address and subnet mask. By default, the Moxa switch's IP address is 192.168.127.253 and the Moxa switch's subnet mask is 255.255.255.0 (referred to as a Class B network). Your PC's IP address must be set to 192.168.xxx.xxx if the subnet mask is 255.255.0.0, or to 192.168.127.xxx if the subnet mask is 255.255.255.0.



### NOTE

To connect to the Moxa switch's Telnet or web console, your PC host and the Moxa switch must be on the same logical subnet.



### NOTE

When connecting to the Moxa switch's Telnet or web console, first connect one of the Moxa switch's Ethernet ports to your Ethernet LAN, or directly to your PC's Ethernet port. You may use either a straight-through or cross-over Ethernet cable.




### NOTE

The Moxa switch's default IP address is 192.168.127.253.



After making sure that the Moxa switch is connected to the same LAN and logical subnet as your PC, open the Moxa switch's Telnet console as follows:

1. Click **Start > Run** from the Windows Start menu and then Telnet to the Moxa switch's IP address from the Windows **Run** window. You may also issue the Telnet command from a DOS prompt.

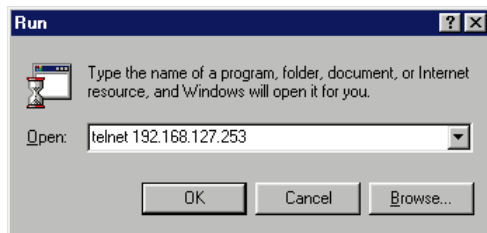

2. In the terminal window, the Telnet console will prompt you to select a terminal type. Type **1** to choose **ansi/vt100**, and then press **Enter**.

```
MOXA ToughNet Switch TN-4516A-12POE-4GPOE-T
Console terminal type (1: ansi/vt100, 2: vt52) : 1_
```


3. The Telnet console will prompt you to log in. Press **Enter** and then select **admin** or **user**. Use the down arrow key on your keyboard to select the **Password** field and enter a password if desired. This password will be required to access any of the consoles (web, serial, Telnet). If you do not wish to create a password, leave the **Password** field blank and press **Enter**.

```
Model :          TN-4516A-12POE-4GPOE-T
Name :          Managed Redundant Switch 02135
Location :      Switch Location
```

```
Firmware Version : V3.3 build 16012111
Serial No :      02135
IP :            192.168.127.253
MAC Address :   00-90-E8-1F-C8-0A
```


```
+-----+
| Account : admin |
| Password :      |
+-----+
```

4. The **Main Menu** of the Moxa switch's Telnet console should appear.

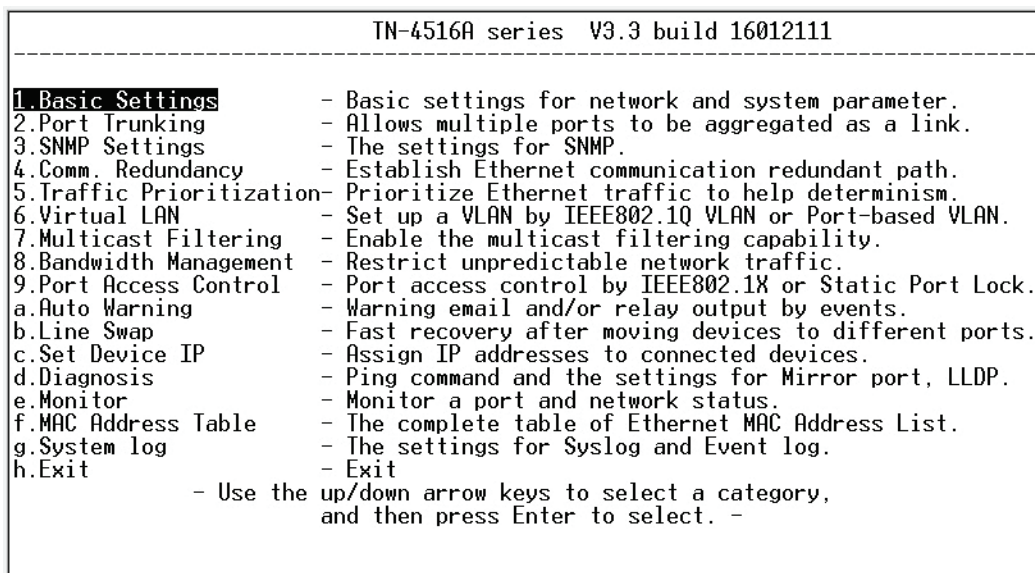

5. In the terminal window, select **Preferences...** from the **Terminal** menu on the menu bar.

6. The **Terminal Preferences** window should appear. Make sure that **VT100 Arrows** is checked.

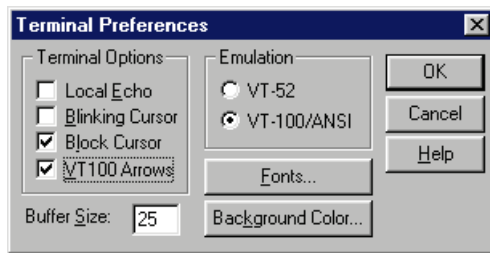

7. Use the following keys on your keyboard to navigate inside the Moxa switch's Telnet console:

Key	Function
Up, down, right, left arrow keys, Tab	Move the onscreen cursor
Enter	Display and select options
Space	Toggle options
Esc	Previous menu



## NOTE

The Telnet console looks and operates in precisely the same manner as the serial console.

## Configuration by Web Browser

The Moxa switch's web console is a convenient platform for modifying the configuration and accessing the built-in monitoring and network administration functions. You can open the Moxa switch's web console using a standard web browser, such as Internet Explorer.



## NOTE

To connect to the Moxa switch's Telnet or web console, your PC host and the Moxa switch must be on the same logical subnet.



## NOTE

If the Moxa switch is configured for other VLAN settings, you must make sure your PC host is on the management VLAN.



## NOTE

When connecting to the Moxa switch's Telnet or web console, first connect one of the Moxa switch's Ethernet ports to your Ethernet LAN, or directly to your PC's Ethernet port. You may use either a straight-through or cross-over Ethernet cable.




## NOTE


The Moxa switch's default IP address is 192.168.127.253.

After making sure that the Moxa switch is connected to the same LAN and logical subnet as your PC, open the Moxa switch's web console as follows:

1. Connect your web browser to the Moxa switch's IP address by entering it in the **Address** or **URL** field.

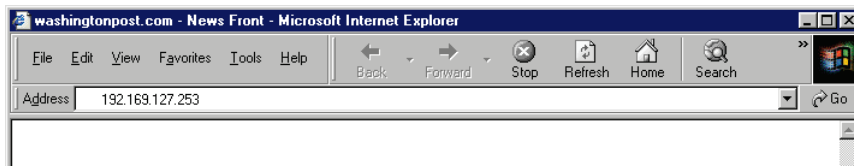


2. The Moxa switch's web console will open, and you will be prompted to log in. Select the login account (admin or user) and enter the **Password**. This password will be required to access any of the consoles (web, serial, Telnet). If you do not wish to create a password, leave the **Password** field blank and press Enter.

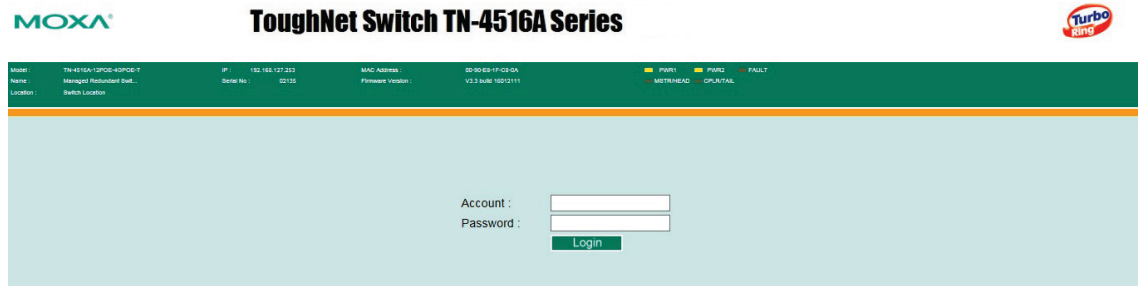

## NOTE

By default, the password assigned to the Moxa switch is moxa. Be sure to change the default password after you first log in to help keep your system secure.

3. After logging in, you may need to wait a few moments for the web console to appear. Use the folders in the left navigation panel to navigate between different pages of configuration options.

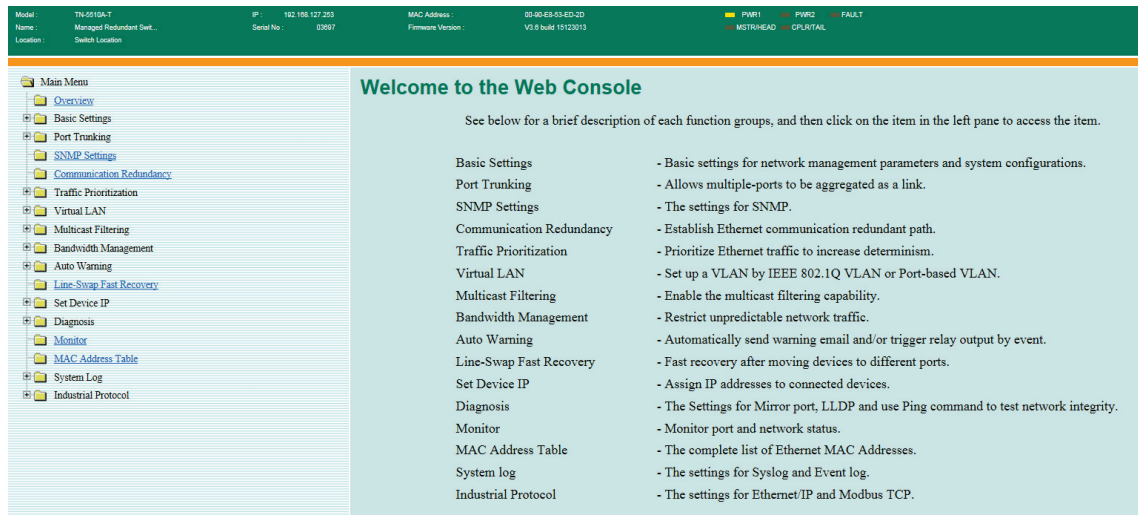

# Disabling Telnet and Browser Access

If you are connecting the Moxa switch to a public network but do not intend to manage it over the network, we suggest disabling both the Telnet and web consoles. This is done from the serial console by navigating to **System Identification** under **Basic Settings**. Disable or enable the **Telnet Console** and **Web Configuration** as shown below:

```
MOXA ToughNet Switch TN-4516A-12POE-4GPOE-T
Basic Settings
[System] [Password] [Accessible IP] [Port] [Network] [Time] [GARP Timer]
[Backup Media] [Restart] [Factory default] [Login mode] [Activate] [Main menu]
System Identification
ESC: Previous menu  Enter: Select  Space bar: Toggle
Switch Name          [Managed Redundant Switch 02135    ]
Switch Location      [Switch Location                    ]
Switch Description   [TN-4516A-12POE-4GPOE-T           ]
Maintainer Contact Info [                                     ]

Serial NO.           02135
Firmware Version     V3.3 build 16012111
MAC Address          00-90-E8-1F-C8-0A

Telnet Console       [Enable ]
Web Configuration    [http or https]
Web Auto-logout (s) [0      ]
Age-time (s)        [300    ]
```

# 3. Featured Functions

In this chapter, we explain how to access the Moxa switch's various configuration, monitoring, and administration functions. These functions can be accessed by serial, Telnet, or web console. The serial console can be used if you do not know the Moxa switch's IP address and requires that you connect the Moxa switch to a PC COM port. The Telnet and web consoles can be opened over an Ethernet LAN or the Internet.

The web console is the most user-friendly interface for configuring a Moxa switch. In this chapter, we use the web console interface to introduce the functions. There are only a few differences between the web console, serial console, and Telnet console.

## Configuring Basic Settings

The **Basic Settings** section includes the most common settings required by administrators to maintain and control a Moxa switch.

## System Identification

**System Identification** items are displayed at the top of the web console and will be included in alarm emails. You can configure the System Identification items to make it easier to identify different switches that are connected to your network.

Switch Name	<input type="text" value="09109"/>
Switch Location	<input type="text" value="Switch Location"/>
Switch Description	<input type="text" value="TN-4516A-12POE-4GPOE-T"/>
Maintainer Contact Info	<input type="text"/>
Web Configuration	<input type="text" value="http or https"/>
Auto-logout (s)	<input type="text" value="300"/>
Age Time (s)	<input type="text" value="300"/>
Web Login Message	<input type="text"/>
	0 characters / Maximum 240 characters
Login Authentication Failure Message	<input type="text"/>
	0 characters / Maximum 240 characters
CPU Loading (past 5 seconds)	<input type="text" value="1 %"/>
CPU Loading (past 30 seconds)	<input type="text" value="2 %"/>
CPU Loading (past 5 minutes)	<input type="text" value="1 %"/>
Free Memory	<input type="text" value="9891236"/>

**Switch Name**

Setting	Description	Factory Default
Max. 35 characters	This option is useful for differentiating between the roles or applications of different units. Example: Factory Switch 1.	Managed Redundant Switch [Serial no. of this switch]

**Switch Location**

Setting	Description	Factory Default
Max. 80 characters	This option is useful for differentiating between the locations of different units. Example: production line 1.	Switch Location

**Switch Description**

Setting	Description	Factory Default
Max. 30 characters	This option is useful for recording a more detailed description of the unit.	Switch Model Name

**Maintainer Contact Info**

Setting	Description	Factory Default
Max. 30 characters	This option is useful for providing information about who is responsible for maintaining this unit and how to contact this person.	None

**Auto-logout (S)**

Setting	Description	Factory Default
60 to 86400 (seconds)	Disable or extend the auto-logout time for the web management console.	300

**Age Time (S)**

Setting	Description	Factory Default
15 to 3825 (seconds)	The length of time that a MAC address entry can remain in the Moxa switch. When an entry reaches its aging time, it "ages out" and is purged from the switch, effectively cancelling frame forwarding to that specific port.	300

**Web Login Message**

Setting	Description	Factory Default
Max. 240 characters	This option is useful as it shows a message when a user's login is successful.	None

**Login Authentication Failure Message**

Setting	Description	Factory Default
Max. 240 characters	This option is useful as it shows a message when a user's login has failed.	None

**CPU Loading**

Setting	Description	Factory Default
Read-only	The CPU usage volume in the past 5 seconds, 30 seconds, and 5 minutes	None

**Free Memory**

Setting	Description	Factory Default
Read-only	The immediately free memory of the switch	None

# Password (User Account)

The Moxa switch supports the management of accounts, including establishing, activating, modifying, disabling, and removing accounts. There are two levels of configuration access: admin and user. Accounts with **admin** authority have read/write access of all configuration parameters, whereas accounts with **user** authority only have read access to view configuration items.



## NOTE

1. In order to maintain a higher level of security, we strongly suggest that you change the password after you first log in.
2. By default, the **admin** user account cannot be deleted or disabled.

Active	Username	Authority	
<input checked="" type="checkbox"/>	admin	admin	Delete
<input checked="" type="checkbox"/>	user	user	Delete

### Active

Setting	Description	Factory Default
Checked	This account can access the switch's configuration settings.	Checked
Unchecked	This account cannot access the switch's configuration settings.	

### Authority

Setting	Description	Factory Default
admin	This account has read/write access of all configuration parameters.	admin
user	This account can only view configuration parameters.	

## Creating a New Account

Click **Create**, type in the user name and password, and assign an authority to the new account. Click **Apply** to add the account to the **Account List** table.

Setting	Description	Factory Default
User Name (Max. 30 characters)	User Name	None
Password	Password for the user account (between 4 and 16 characters)	None

## Modifying an Existing Account

Select an existing account from the Account List table, modify the account details, and then click **Apply** to save the changes.

**User Account**

Active

Authority

Username

Old Password

Password

Confirm Password

**Account List**

Active	Username	Authority	
<input checked="" type="checkbox"/>	admin	admin	<input type="button" value="Delete"/>
<input checked="" type="checkbox"/>	user	user	<input type="button" value="Delete"/>

## Deleting an Existing Account

Select an account from the **Account List** table and then click **Delete** to delete the account.

**User Account**

Active

Authority

Username

Old Password

Password

Confirm Password

**Account List**

Active	Username	Authority	
<input checked="" type="checkbox"/>	admin	admin	<input type="button" value="Delete"/>
<input checked="" type="checkbox"/>	user	user	<input type="button" value="Delete"/>
<input checked="" type="checkbox"/>	testuser1	admin	<input type="button" value="Delete"/>

Message from webpage

testuser1 will be removed and logged out after confirmation.



# Password Login Policy

In order to prevent hackers from cracking the password, Moxa switches allow users to configure a password for their account and lock the account in the event that the wrong password is entered. The account password policy requires passwords to be of a minimum length and complexity with a strength check. If Account Login Failure Lockout is enabled, you will need to configure the **Retry Failure Threshold** and **Lockout Time** parameters. If the number of login attempts exceeds the Retry Failure Threshold, users will need to wait the number of minutes configured in Lockout Time before trying again.

The screenshot shows a configuration page titled "Account Password and Login Management". It contains two main sections: "Account Password Policy" and "Account Login Failure Lockout".

- Account Password Policy:**
  - Minimum Length: 4 (range 4-16)
  - Enable password complexity strength check (checkbox):
    - At least one digit (0-9) (checkbox)
    - Mixed upper and lower case letters (A-Z, a-z) (checkbox)
    - At least one special character (~!@#%\*&\*~!;:,.<>[]{}()) (checkbox)
- Account Login Failure Lockout:**
  - Enable (checkbox)
  - Retry Failure Threshold: 5 (range 1-10)
  - Lockout Time (min): 5 (range 1-60)

An "Activate" button is located at the bottom left of the form.

# Accessible IP List

The Moxa switch uses an IP address-based filtering method to control access.

The screenshot shows a configuration page titled "Accessible IP List". It features a checkbox to "Enable the accessible IP list ('Disable' will allow all IP's connection)". Below this is a table with 10 rows, each with an "Index", "IP", and "NetMask" column. All fields are currently empty. An "Activate" button is at the bottom.

Index	IP	NetMask
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

You may add or remove IP addresses to limit access to the Moxa switch. When the accessible IP list is enabled, only addresses on the list will be allowed access to the Moxa switch. Each IP address and netmask entry can be tailored for different situations:

- Grant access to one host with a specific IP address**  
For example, enter IP address 192.168.1.1 with netmask 255.255.255.255 to allow access to 192.168.1.1 only.
- Grant access to any host on a specific subnetwork**  
For example, enter IP address 192.168.1.0 with netmask 255.255.255.0 to allow access to all IPs on the subnet defined by this IP address/subnet mask combination.
- Grant access to all hosts**  
Make sure the accessible IP list is not enabled. Remove the checkmark from **Enable the accessible IP list**.

The following table shows additional configuration examples:

Hosts That Need Access	Input Format
Any host	Disable
192.168.1.120	192.168.1.120 / 255.255.255.255
192.168.1.1 to 192.168.1.254	192.168.1.0 / 255.255.255.0
192.168.0.1 to 192.168.255.254	192.168.0.0 / 255.255.0.0
192.168.1.1 to 192.168.1.126	192.168.1.0 / 255.255.255.128
192.168.1.129 to 192.168.1.254	192.168.1.128 / 255.255.255.128

## Port Settings

### Ethernet Port Settings

Port settings are included to give the user control over port access, port transmission speed, flow control, and port type (MDI or MDIX).

Port	Enable	Description	Name	Speed	FDX Flow Ctrl	MDI/MDIX
1	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
2	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
3	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
4	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
5	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
6	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
7	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
8	<input checked="" type="checkbox"/>	100TX		Auto	Disable	Auto
9	<input checked="" type="checkbox"/>	1000TX, Bypass.		Auto	Disable	Auto

**Activate**

#### Enable

Setting	Description	Factory Default
Checked	Allows data transmission through the port.	Enabled
Unchecked	Immediately shuts off port access.	



### ATTENTION

If a connected device or sub-network is wreaking havoc on the rest of the network, the **Disable** option under **Advanced Settings/Port** gives the administrator a quick way to shut off access through this port immediately.

#### Description

Setting	Description	Factory Default
Media type	Displays the media type for each module's port	N/A

#### Name

Setting	Description	Factory Default
Max. 63 characters	Specifies an alias for the port to help administrators differentiate between different ports. Example: PLC 1	None

#### Speed

Setting	Description	Factory Default
Auto	Allows the port to use the IEEE 802.3u protocol to negotiate with connected devices. The port and connected devices will determine the best speed for that connection.	Auto
1G-Full	Choose one of these fixed speed options if the connected Ethernet device has trouble auto-negotiating for line speed.	
100M-Full		
100M-Half		
10M-Full		
10M-Half		

### FDX Flow Ctrl

This setting enables or disables flow control for the port when the port's Speed is set to Auto. The final result will be determined by the Auto process between the Moxa switch and connected devices.

Setting	Description	Factory Default
Enable	Enables flow control for this port when the port's Speed is set to Auto.	Disabled
Disable	Disables flow control for this port when the port's Speed is set to Auto.	

### MDI/MDIX

Setting	Description	Factory Default
Auto	Allows the port to auto-detect the port type of the connected Ethernet device and change the port type accordingly.	Auto
MDI	Choose MDI or MDIX if the connected Ethernet device has trouble auto-negotiating for port type.	
MDIX		

## Network Parameters

Network configuration allows users to configure both IPv4 and IPv6 parameters for management access over the network. The Moxa switch supports both IPv4 and IPv6, and can be managed through either of these address types.

A brief explanation of each configuration item is given below.

The screenshot shows the 'Network Parameters' configuration page. Under 'General Settings', there are two sections: IPv4 and IPv6. The IPv4 section includes fields for Auto IP Configuration (set to 'Disable'), Switch IP Address (192.168.127.253), Switch Subnet Mask (255.255.255.0), Default Gateway, 1st DNS Server IP Address, 2nd DNS Server IP Address, Dhcp Retry Periods (1), Dhcp Retry Times (0), an unchecked checkbox for 'Enable Option 61', Type (User defined), and Client ID. The IPv6 section includes fields for Global Unicast Address Prefix, Global Unicast Address (::), and Link-Local Address (fe80::290:e8ff:feab:a57), with an 'Activate' button below.

## IPv4

The IPv4 settings include the switch's IP address and subnet mask, as well as the IP address of the default gateway. In addition, input cells are provided for the IP addresses of a 1st and 2nd DNS server.

### **Auto IP Configuration**

Setting	Description	Factory Default
Disable	The Moxa switch's IP address must be set manually.	Disable
By DHCP	The Moxa switch's IP address will be assigned automatically by the network's DHCP server.	
By BootP	The Moxa switch's IP address will be assigned automatically by the network's BootP server.	

### **Switch IP Address**

Setting	Description	Factory Default
IP address for the Moxa switch	Assigns the Moxa switch's IP address on a TCP/IP network.	192.168.127.253

### **Switch Subnet Mask**

Setting	Description	Factory Default
Subnet mask for the Moxa switch	Identifies the type of network the Moxa switch is connected to (e.g., 255.255.0.0 for a Class B network, or 255.255.255.0 for a Class C network).	255.255.255.0

### **Default Gateway**

Setting	Description	Factory Default
IP address for gateway	Specifies the IP address of the router that connects the LAN to an outside network.	None

### **DNS IP Address**

Setting	Description	Factory Default
IP address for DNS server	Specifies the IP address of the DNS server used by your network. After specifying the DNS server's IP address, you can use the Moxa switch's URL (e.g., www.PT.company.com) to open the web console instead of entering the IP address.	None
IP address for 2nd DNS server	Specifies the IP address of the secondary DNS server used by your network. The Moxa switch will use the secondary DNS server if the first DNS server fails to connect.	None

### **DHCP Retry Periods**

Setting	Description	Factory Default
1 to 30	Users can configure the DHCP retry period manually.	1

### **DHCP Retry Times**

Setting	Description	Factory Default
0 to 65535	Users can configure the times of DHCP retry manually.	0

### **DHCP Option 61**

Setting	Description	Factory Default
Enable/Disable	Enable or disable DHCP Option 61 support.	Disable

### **DHCP Option 61 Type**

Setting	Description	Factory Default
User-defined	Users can configure the DHCP Option 61 value manually.	User-defined
Client ID	This ID is used as a unique identifier for the DHCP client.	None

## IPv6

The IPv6 settings include two distinct address types—Link-Local Unicast addresses and Global Unicast addresses. A Link-Local address makes the switch accessible over IPv6 for all devices attached to the same local subnet. To connect to a larger network with multiple segments, the switch must be configured with a Global Unicast address.

### Global Unicast Address Prefix (Prefix Length: 64 bits) Default Gateway

Setting	Description	Factory Default
Global Unicast Address Prefix	The prefix value must be formatted according to the RFC 2373 "IPv6 Addressing Architecture," using 8 colon-separated 16-bit hexadecimal values. One double colon may be used in the address to indicate the appropriate number of zeros required to fill the undefined fields.	None

### Global Unicast Address

Setting	Description	Factory Default
None	Displays the IPv6 Global Unicast address. The network portion of the Global Unicast address can be configured by specifying the Global Unicast Prefix and using an EUI-64 interface ID in the low order 64 bits. The host portion of the Global Unicast address is automatically generated using the modified EUI-64 form of the interface identifier (Switch's MAC address).	None

### Link-Local Address

Setting	Description	Factory Default
None	The network portion of the Link-Local address is FE80 and the host portion of the Link-Local address is automatically generated using the modified EUI-64 form of the interface identifier (Switch's MAC address)	None

### Neighbor Cache

IPv6 Address	Link Layer (MAC) Address	State
fe80::290:e8ff:fe0e:e02	00-90-e8-0e-0e-02	Reachable

### Neighbor Cache

Setting	Description	Factory Default
None	The information in the neighbor cache that includes the neighboring node's IPv6 address, the corresponding Link-Layer address, and the current state of the entry.	None

## GARP Timer Parameters

### GARP Timer Parameters

Join Time (ms)

Leave Time (ms)

Leaveall Time (ms)

### Join Time

Setting	Description	Factory Default
None	Specifies the period of the join time	200

### Leave Time

Setting	Description	Factory Default
None	Specifies the period of leave time	600

### Leaveall Time

Setting	Description	Factory Default
None	Specifies the period of leaveall time	10000



### NOTE

**Leave Time** should be at least two times more than **Join Time**, and **Leaveall Time** should be larger than **Leave Time**.

## System Time Settings

The Moxa switch has a time calibration function based on information from an NTP server or user specified time and date. Functions such as automatic warning emails can therefore include time and date stamp.



### NOTE

The user must update the Current Time and Current Date after powering off the switch for a long period of time (for example a few days). The user must pay particular attention to this when there is no NTP server, LAN, or Internet connection.

### Current Time

Setting	Description	Factory Default
User-specified time	Allows configuration of the local time in local 24-hour format.	None

### Current Date

Setting	Description	Factory Default
User-specified date	Allows configuration of the local date in yyyy-mm-dd format.	None

### Daylight Saving Time

The Daylight Saving Time settings are used to automatically set the Moxa switch's time forward according to national standards.

### Start Date

Setting	Description	Factory Default
User-specified date	Specifies the date that Daylight Saving Time begins.	None

### End Date

Setting	Description	Factory Default
User-specified date	Specifies the date that Daylight Saving Time ends.	None

### Offset

Setting	Description	Factory Default
User-specified hour	Specifies the number of hours that the time should be set forward during Daylight Saving Time.	None

### System Up Time

Indicates how long the Moxa switch remained up since the last cold start. The up time is indicated in seconds.

### Time Zone

Setting	Description	Factory Default
Time zone	Specifies the time zone, which is used to determine the local time offset from GMT (Greenwich Mean Time).	GMT (Greenwich Mean Time)



## NOTE

Changing the time zone will automatically correct the current time. Be sure to set the time zone before setting the time.

### Time Server IP/Name

Setting	Description	Factory Default
IP address or name of time server	The IP or domain address (e.g., 192.168.1.1, time.stdtime.gov.tw, or time.nist.gov).	None
IP address or name of secondary time server	The Moxa switch will try to locate the secondary NTP server if the first NTP server fails to connect.	

### Time Server Query Period

Setting	Description	Factory Default
1 to 9999 seconds	Specifies the query period of the time server	600 seconds

### Time Protocol

Setting	Description	Factory Default
Disable/SNTP Client/NTP Client	Specifies the time protocol	SNTP Client

### Enable NTP/SNTP Server

Setting	Description	Factory Default
Enable/Disable	Enables SNTP/NTP server functionality for clients	Disabled

## System File Update

### Firmware Upgrade

There are two ways to update your Moxa switch's firmware: from a local \*.rom file, and by remote TFTP server.

#### Local

### Firmware Upgrade

Local  TFTP Server

Upgrade Firmware From

1. Download the updated firmware (\*.rom) file from Moxa's website ([www.moxa.com](http://www.moxa.com)).
2. Browse for the (\*.rom) file, and then click the **Upgrade** button

### TFTP Server

1. Enter the TFTP server's IP address.
2. Input the firmware file name (\*.rom) and click the **Upgrade** button.

### SCP Server

1. Enter the SCP server's IP address.
2. Input the firmware file name (\*.rom).
3. Enter the SCP server authentication user account and password.
4. Click the **Upgrade** button.

## Configuration Backup and Restore

There are two ways to back up and restore your Moxa switch's configuration: from a local configuration file, and by remote TFTP server.

### Local

1. Click the **Backup** button to back up the configuration file to a local drive.
2. Browse for a configuration on a local disk, and then click the **Restore** button.



## TFTP Server

The screenshot shows the 'Configuration Backup and Restore' interface for a TFTP server. At the top, there are radio buttons for 'Local' and 'TFTP Server', with 'TFTP Server' selected. Below this, the text 'Backup Configuration File to' is followed by 'TFTP Server'. There are two input fields: 'Server IP' and 'File Name'. To the right of these fields are two green buttons: 'Backup' and 'Restore'. Below the input fields, there is a section titled 'Configuration File Encryption Setting' with a checkbox for 'Enable Password' and an empty input field. To the right of this section is an 'Apply' button.

1. Enter the TFTP Server's IP address.
2. Input the backup/restore file name (supports up to 54 characters, including the .ini file extension) and then click the **Backup/Restore** button.

## SCP Server

The screenshot shows the 'Configuration Backup and Restore' interface for an SCP server. At the top, there are radio buttons for 'Local', 'TFTP Server', and 'SCP', with 'SCP' selected. Below this, the text 'Backup Configuration File to SCP Server' is followed by a green 'Backup' button. There are four input fields: 'Server IP' (Max. 15 characters), 'File Name' (Max. 64 characters), 'Account' (Max. 16 characters), and 'Password' (Max. 48 characters). To the right of these fields are two green buttons: 'Restore' and 'Apply'. Below the input fields, there is a section titled 'Configuration File Encryption Setting' with a checkbox for 'Enable Password' and an empty input field.

1. Enter the SCP server's IP address.
2. Input the firmware file name (\*.rom).
3. Enter the SCP server authentication user account and password.
4. Click the **Restore** button.

## Log File Backup

There are two ways to back up Moxa switch's log files: from a local drive and by remote TFTP server.

## Local



The screenshot shows the 'Log File Backup' configuration page. At the top, there are two radio buttons: 'Local' (which is selected) and 'TFTP Server'. At the bottom right, there is a green 'Backup' button.

Click the **Backup** button to back up the log file to a local drive.


## TFTP Server



The screenshot shows the 'Log File Backup' configuration page. At the top, there are two radio buttons: 'Local' and 'TFTP Server' (which is selected). Below the radio buttons are two input fields: 'Server IP' and 'File Name'. At the bottom right, there is a green 'Backup' button.

Enter the TFTP Server's IP address and file name and then click the Backup button.

## SCP Server

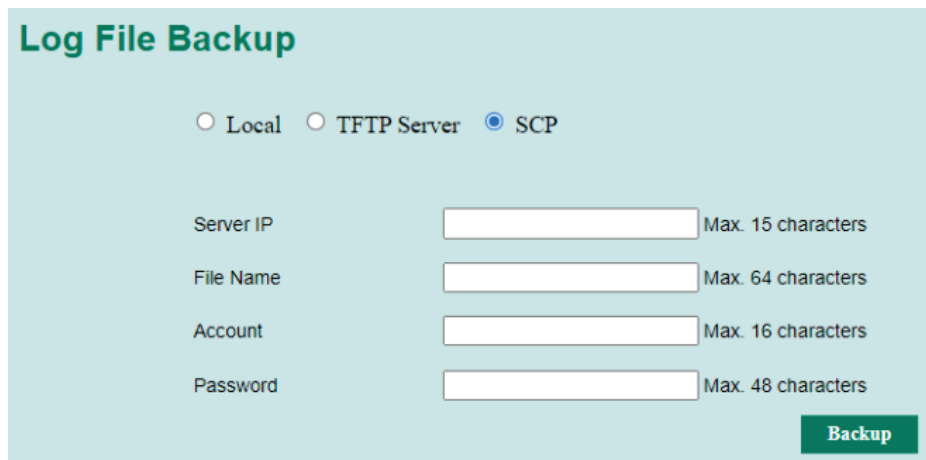

The screenshot shows the 'Log File Backup' configuration page. At the top, there are three radio buttons: 'Local', 'TFTP Server', and 'SCP' (which is selected). Below the radio buttons are four input fields: 'Server IP' (Max. 15 characters), 'File Name' (Max. 64 characters), 'Account' (Max. 16 characters), and 'Password' (Max. 48 characters). At the bottom right, there is a green 'Backup' button.

1. Enter the SCP server's IP address.
2. Input the firmware file name (\*.rom).
3. Enter the SCP server authentication user account and password.
4. Click the **Backup** button.

## ABC (Auto-Backup Configurator) Configuration

You can use Moxa's Automatic Backup Configurator to save and load the Moxa switch's configurations through the switch's RS-232 console port.

## ABC (Auto-Backup Configurator) Configuration

Auto load ABC's system configurations when system boots up

Activate

Save the current configurations to ABC

Save

Load the ABC's configurations to Switch

Load

## Security

Security can be categorized into two levels: the username/password level, and the port access level. Moxa switches provide many kinds of security functions, including Management Interface, SSL/SSH Authentication certificate, Login Authentication, Static Port Lock, IEEE 802.1X, Accessible IP, Broadcast Storm Protection, Loop Protection, and Access Control List.



### NOTE

Accessible IP, Broadcast Storm Protection, Loop Protection, and Access Control List are described in other chapters.

## Management Interface



### NOTE

The HTTP and Telnet interfaces transmit data over unsecure, non-encrypted channels. We highly recommend using the secure HTTPS and SSH interfaces instead.

### Management Interface

<input checked="" type="checkbox"/> Enable HTTP	TCP Port	<input type="text" value="80"/>	
<input checked="" type="checkbox"/> Enable HTTPS	TCP Port	<input type="text" value="443"/>	
<input checked="" type="checkbox"/> Enable Telnet	TCP Port	<input type="text" value="23"/>	
<input checked="" type="checkbox"/> Enable SSH	TCP Port	<input type="text" value="22"/>	
<input checked="" type="checkbox"/> Enable SNMP	UDP Port	<input type="text" value="161"/>	
<input checked="" type="checkbox"/> Enable Moxa Service	TCP Port	<input type="text" value="4000"/>	UDP Port <input type="text" value="4000"/>
<input checked="" type="checkbox"/> Enable Moxa Service(Encrypted)	TCP Port	<input type="text" value="443"/>	UDP Port <input type="text" value="40404"/>
Max. No. of Login Users For HTTP+HTTPS		<input type="text" value="5"/>	(1~10)
Max. No. of Login Users For Telnet+SSH		<input type="text" value="1"/>	(1~5)

Activate

#### Enable HTTP

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable HTTP	TCP Port: 80

#### Enable HTTPS

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable HTTPS	TCP Port: 443

#### Enable Telnet

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable Telnet	TCP Port: 23

#### Enable SSH

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable SSH	TCP Port: 22

#### Enable SNMP

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable SNMP	UDP Port: 161

#### Enable Moxa Service

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable Moxa Service. NOTE: Moxa Service is only for Moxa network management software suite.	TCP Port: 4000 UDP Port: 4000

#### Enable Moxa Service (Encrypted)

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable Moxa Service (Encrypted). NOTE: Moxa Service (Encrypted) is only for Moxa network management software suite.	TCP Port: 443 UDP Port: 40404

#### Max. No. of Login Users For HTTP+HTTPS

Setting	Description	Factory Default
Integer (1 to 10)	Set the maximum number of login users for HTTP and HTTPS	5


#### Max. No. of Login Users For Telnet+SSH

Setting	Description	Factory Default
Integer (1 to 5)	Set the maximum number of login users for Telnet and SSH	1

## User Login Authentication

### User Login Authentication – User Login Settings


Both TACAS+ and RADIUS are options here.

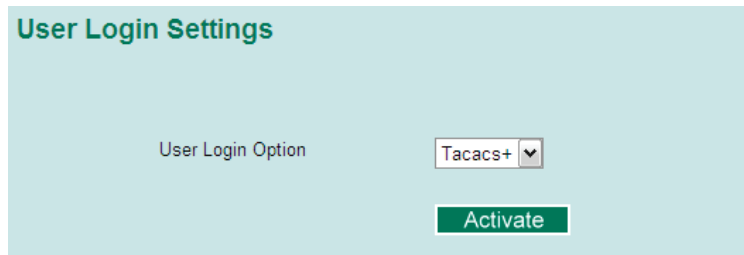


The screenshot shows the 'User Login Settings' configuration page. It features a label 'User Login Option' next to a dropdown menu currently set to 'Tacacs+'. Below this is a green 'Activate' button.

### User Login Authentication – Auth Server Setting

The detailed configuration settings of TACACS+ and RADIUS are displayed in the table below:

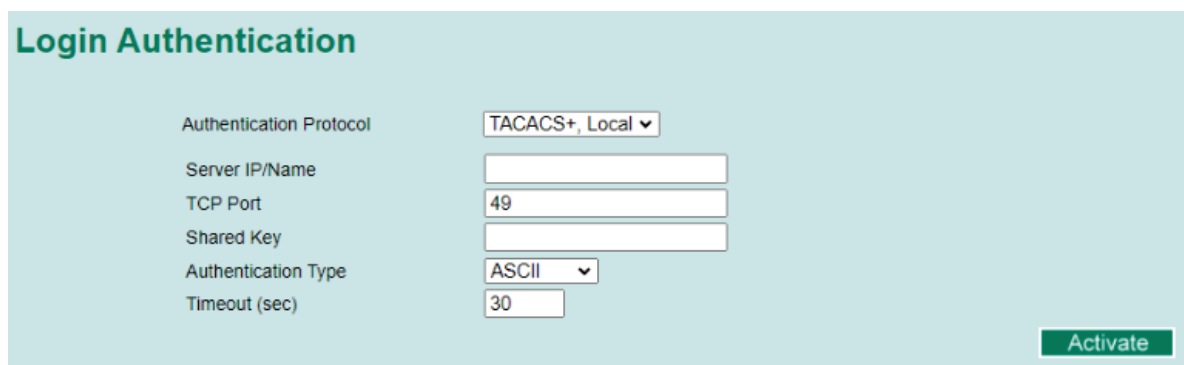

The screenshot shows the 'Login Authentication' configuration page for TACACS+, Local. The settings are: Authentication Protocol (TACACS+, Local), Server IP/Name (empty), TCP Port (49), Shared Key (empty), Authentication Type (ASCII), and Timeout (sec) (30). A green 'Activate' button is located at the bottom right.

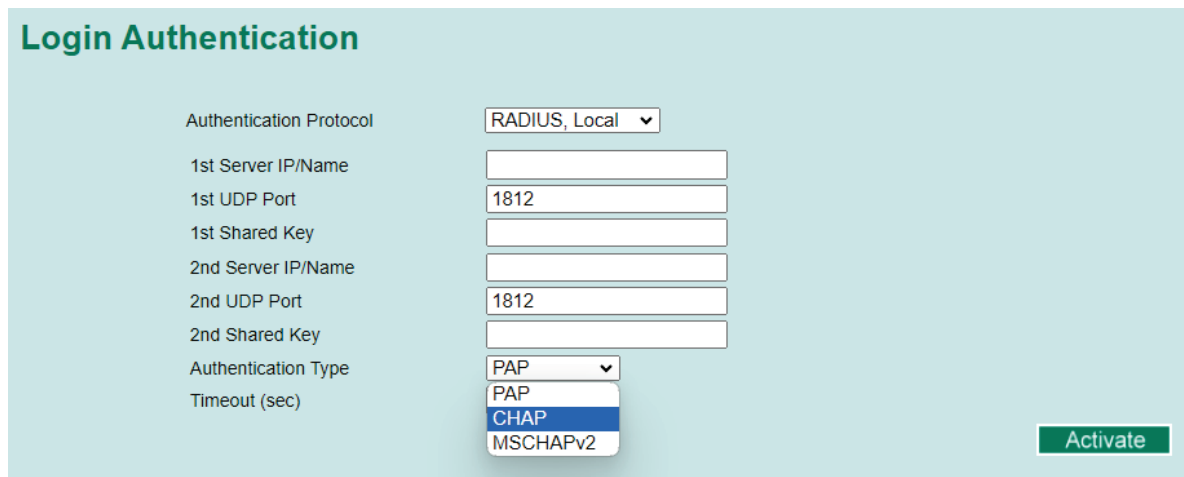

The screenshot shows the 'Login Authentication' configuration page for RADIUS, Local. The settings are: Authentication Protocol (RADIUS, Local), 1st Server IP/Name (empty), 1st UDP Port (1812), 1st Shared Key (empty), 2nd Server IP/Name (empty), 2nd UDP Port (1812), 2nd Shared Key (empty), Authentication Type (PAP), and Timeout (sec) (30). A dropdown menu for Authentication Type is open, showing options: PAP, CHAP, and MSCHAPv2. A green 'Activate' button is located at the bottom right.

Setting	Description	Factory Default
Authentication Protocol	Select the authentication type: TACACS+, Local and RADIUS, Local.	TACACS+, Local
Server IP/Name	Set IP address of an external TACACS+/RADIUS server as the authentication database.	Localhost
TCP Port	Set the communication port of an external TACACS+ server as the authentication database.	TACACS+: 49
Shared Key	Set specific characters for server authentication verification.	None
1st server IP/Name	Set the IP address of the 1st external RADIUS server as the authentication database.	None

Setting	Description	Factory Default
1st UDP port	Set a communication port of the 1st external RADIUS server as the authentication database.	RADIUS: 1812
1st shared key	Set specific characters for the 1st external RADIUS server authentication verification.	None
2nd server IP/Name	Set the IP address of the 2nd external RADIUS server as the authentication database.	None
2nd UDP port	Set a communication port of the 2nd external RADIUS server as the authentication database.	RADIUS: 1812
2nd shared key	Set specific characters for the 2nd external RADIUS server authentication verification.	None
Authentication Type	The authentication mechanism used between the authentication server and client.	TACACS+: ASCII RADIUS: PAP, CHAP, MSCHAPv2
Timeout	Specify the timeout period to wait for a server response.	TACACS+: 30 RADIUS: 5

## Port Access Control

The Moxa switch provides two kinds of Port-Based Access Control: Static Port Lock and IEEE 802.1X.

### Static Port Lock

In this case, the Moxa switch can also be configured to protect static MAC addresses for a specific port. With the Port Lock function, these locked ports will not learn any additional addresses, but only allow traffic from preset static MAC addresses, helping to block hackers and careless usage.

### IEEE 802.1X

The IEEE 802.1X standard defines a protocol for client/server-based access control and authentication. The protocol restricts unauthorized clients from connecting to a LAN through ports that are open to the Internet, and which otherwise would be readily accessible. The purpose of the authentication server is to check each client that requests access to the port. The client is only allowed access to the port if the client's permission is authenticated.

Three components are used to create an authentication mechanism based on 802.1X standards: Client/Supplicant, Authentication Server, and Authenticator.

**Client/Supplicant:** The end station that requests access to the LAN and switch services and responds to the requests from the switch.

**Authentication Server:** The server that performs the actual authentication of the supplicant.

**Authenticator:** Edge switch or wireless access point that acts as a proxy between the supplicant and the authentication server, requesting identity information from the supplicant, verifying the information with the authentication server, and relaying a response to the supplicant.

The Moxa switch acts as an authenticator in the 802.1X environment. A supplicant and an authenticator exchange EAPOL (Extensible Authentication Protocol over LAN) frames with each other. We can either use an external RADIUS server as the authentication server, or implement the authentication server in the Moxa switch by using a Local User Database as the authentication look-up table. When we use an external RADIUS server as the authentication server, the authenticator and the authentication server exchange EAP frames between each other.

Authentication can be initiated either by the supplicant or the authenticator. When the supplicant initiates the authentication process, it sends an **EAPOL-Start** frame to the authenticator. When the authenticator initiates the authentication process or when it receives an **EAPOL Start** frame, it sends an **EAP Request/Identity** frame to ask for the username of the supplicant.

## Configuring Static Port Lock

The Moxa switch supports adding unicast groups manually if required.

### Static Unicast MAC Address

Setting	Description	Factory Default
MAC Address	Adds the static unicast MAC address into the address table.	None
Port	Associates the static address to a dedicated port.	1 or 1-1

## Configuring IEEE 802.1X

### Database Option

Setting	Description	Factory Default
Local (Max. of 32 users)	Select this option when setting the Local User Database as the authentication database.	Local
Radius	Select this option to set an external RADIUS server as the authentication database. The authentication mechanism is EAP-MD5.	
Radius, Local	Select this option to make using an external RADIUS server as the authentication database the first priority. The authentication mechanism is EAP-MD5. The second priority is to set the Local User Database as the authentication database.	

### Re-Auth

Setting	Description	Factory Default
Enable/Disable	Select enable to require re-authentication of the client after a preset time period of no activity has elapsed.	Disable

### Re-Auth Period

Setting	Description	Factory Default
Numerical (60 to 65535 sec.)	Specify how frequently the end stations need to reenter usernames and passwords in order to stay connected.	3600

### 802.1X

Setting	Description	Factory Default
Enable/Disable	Checkmark the checkbox under the 802.1X column to enable IEEE 802.1X for one or more ports. All end stations must enter usernames and passwords before access to these ports is allowed.	Disable

## 802.1X Re-Authentication

The Moxa switch can force connected devices to be re-authorized manually.

### 802.1X Re-Authentication

Port	802.1X
1-1	<input type="checkbox"/> Re-Authenticate
1-2	<input type="checkbox"/> Re-Authenticate

### 802.1X Re-Authentication

Setting	Description	Factory Default
Enable/Disable	Enables or disables 802.1X Re-Authentication	Disable

## Local User Database Setup

When setting the Local User Database as the authentication database, set the database first.

### Local User Database Setup

Current Local Database

	Index	User Name	Description
<input type="checkbox"/>			

**Add New User**

User Name

Password

Description

### Local User Database Setup

Setting	Description	Factory Default
User Name (Max. of 30 characters)	User Name for the Local User Database	None
Password (Max. of 16 characters)	Password for the Local User Database	None
Description (Max. of 30 characters)	Description for the Local User Database	None



### NOTE

The user name for the Local User Database is case-insensitive.



## Dot1X Radius Server Setting

### Dot1X Radius Server Setting

Same as Auth Server Setting

1st Server IP/Name

1st Server Port

1st Server Shared Key  (Max. 15 characters)

2nd Server IP/Name

2nd Server Port

2nd Server Shared Key  (Max. 15 characters)

### Same as Auth Server Setting

Setting	Description	Factory Default
Enable/Disable	Enable to use the same setting as Auth Server	Disable

### Server Setting

Setting	Description	Factory Default
Server IP/Name	Specifies the IP/name of the server	localhost
Server Port	Specifies the port of the server	1812
Server Shared Key	Specifies the shared key of the server	None

## Port Access Control Table

### Port Access Control Table

Port

<input type="checkbox"/> Select All	Index	Mac Address	Status

The port status will show authorized or unauthorized.

# Authentication Certificate

## SSL Certificate Management

**SSL Certificate Management**

CA Name	Expiration Date
Moxa Networking Co., Ltd.	Nov 12 08:18:23 2032 GMT

**Certificate Import**

PKCS#12 Upload

Import Password

**Certificate Re-generate**

Re-generate

### Certificate Import

- Click **Browse** and select Public-Key Cryptography Standard PKCS#12 certificate file
- Enter the **Import Password** and click **Import**
- The SSL certificate will be updated

### Certificate Re-generate

Setting	Description	Factory Default
Select/Deselect	Enable the SSL Certificate Regeneration	Deselect

## SSH Key Management

**SSH Key management**

**SSH Key**

Re-generate

Note: Regeneration may take a few minutes. The connection will be temporarily unavailable until the regeneration is completed.

### SSH Key Re-generate

Setting	Description	Factory Default
Select/Deselect	Enable the SSH Key Re-generate	Deselect


## Restart

This function provides users with a quick way to restart the system.

**Restart**

This function will restart the system.

## Reset to Factory Default

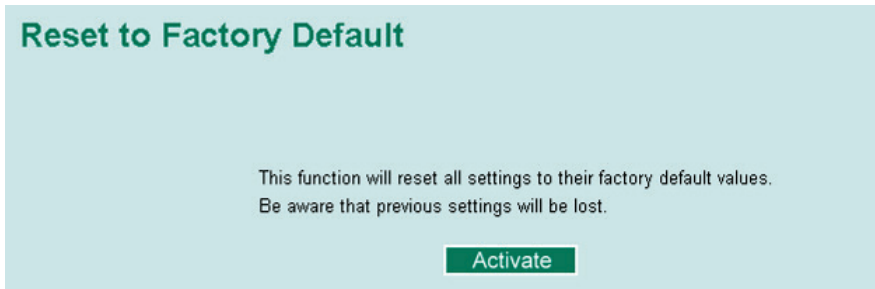

This function provides users with a quick way of restoring the Moxa switch's configuration to factory defaults. The function is available in the serial, Telnet, and web consoles.



### NOTE

After restoring the factory default configuration, you will need to use the default network settings to re-establish the web or Telnet console connection with the Moxa switch.

## Loop Protection

The switch is designed with a loop checking mechanism whereby it sends a control BPDU from the Ethernet port and checks if this control BPDU will be sent back to the switch again. If the looping occurs, the switch will automatically block the Ethernet port to prevent looping.



### Enable Loop Protection

Setting	Description	Factory Default
Enable/Disable	Enable/Disable the Loop Protection Function	Disable

## Using Port Trunking

Link aggregation involves grouping links into a link aggregation group. A MAC client can treat link aggregation groups as if they were a single link.

The Moxa switch's port trunking feature allows devices to communicate by aggregating up to 4 trunk groups, with a maximum of 8 ports for each group. If one of the 8 ports fails, the other seven ports will automatically provide backup and share the traffic.

Port trunking can be used to combine up to 8 ports between two Moxa switches. If all ports on both switches are configured as 100BaseTX and they are operating in full duplex, the potential bandwidth of the connection will be 1600 Mbps.

# The Port Trunking Concept

Moxa has developed a port trunking protocol that provides the following benefits:

- Greater flexibility in setting up your network connections, since the bandwidth of a link can be doubled, tripled, or quadrupled.
- Redundancy—if one link is broken, the remaining trunked ports share the traffic within this trunk group.
- Load sharing—MAC client traffic can be distributed across multiple links.

To avoid broadcast storms or loops in your network while configuring a trunk, first disable or disconnect all ports that you want to add to the trunk or remove from the trunk. After you finish configuring the trunk, enable or re-connect the ports.

If all ports on both switch units are configured as 100BaseTX and they are operating in full duplex mode, the potential bandwidth of the connection will be up to 1.6 Gbps. This means that users can double, triple, or quadruple the bandwidth of the connection by port trunking between two Moxa switches.

Each Moxa switch can set a maximum of 4 port trunking groups. When you activate port trunking, certain settings on each port will be reset to factory default values or disabled:

- Communication redundancy will be reset
- 802.1Q VLAN will be reset
- Multicast Filtering will be reset
- Port Lock will be reset and disabled.
- Set Device IP will be reset
- Mirror will be reset

After port trunking has been activated, you can configure these items again for each trunking port.

## Port Trunking Settings

The **Port Trunking Settings** page is where ports are assigned to a trunk group.

Port	Enable	Description	Name	Speed	FDX Flow Ctrl
<input type="checkbox"/>	1-1	Yes	100TX,RJ45.	Auto	Disable
<input type="checkbox"/>	1-2	Yes	100TX,RJ45.	Auto	Disable
<input type="checkbox"/>	1-3	Yes	100TX,RJ45.	Auto	Disable
<input type="checkbox"/>	1-4	Yes	100TX,RJ45.	Auto	Disable

**Step 1:** Select the desired **Trunk Group**

**Step 2:** Select the **Trunk Type** (Static or LACP).

**Step 3:** Select the desired ports under **Available Ports** and click **Up** to add to the Trunk Group.

**Step 4:** Select the desired ports under **Member Ports** and click **Down** to remove from the group.

### Trunk Group (maximum of 4 trunk groups)

Setting	Description	Factory Default
Trk1, Trk2, Trk3, Trk4 (depends on switching chip capability; some Moxa switches only support 3 trunk groups)	Specifies the current trunk group.	Trk1

### Trunk Type

Setting	Description	Factory Default
Static	Selects Moxa's proprietary trunking protocol.	Static
LACP	Selects LACP (IEEE 802.3ad, Link Aggregation Control Protocol).	Static

### Available Ports/Member Ports

Setting	Description	Factory Default
Member/Available ports	Lists the ports in the current trunk group and the ports that are available to be added.	N/A
Check box	Selects the port to be added or removed from the group.	Unchecked
Port	How each port is identified.	N/A
Port description	Displays the media type for each port.	N/A
Name	Displays the specified name for each port.	N/A
Speed	Indicates the transmission speed for each port (1G-Full, 100M-Full, 100M-Half, 10M-Full, or 10M-Half).	N/A
FDX flow control	Indicates if the FDX flow control of this port is enabled or disabled.	N/A
Up	Add selected ports into the trunk group from available ports.	N/A
Down	Remove selected ports from the trunk group.	N/A

## Trunk Table

Trunk Group	Member Port	Status
Trk1 (Static)	1-1	Success
	1-2	Success
	1-3	Success

### Trunk Table

Setting	Description
Trunk group	Displays the trunk type and trunk group.
Member port	Displays the member ports that belong to the trunk group.
Status	<ul style="list-style-type: none"><li>Success means port trunking is working properly.</li><li>Fail means port trunking is not working properly.</li></ul>

# Configuring SNMP

The Moxa switch supports SNMP V1, V2c, and V3. SNMP V1 and SNMP V2c use a community string match for authentication, which means that SNMP servers access all objects with read-only or read/write permissions using the community strings *public* and *private* by default. SNMP V3 requires that you select an authentication level of MD5 or SHA, and is the most secure protocol. You can also enable data encryption to enhance data security.



## ATTENTION

For security reasons, we strongly recommend changing the default community strings and device password when using the device for the first time.

Using the default community strings and password may expose the device to malicious users.

Supported SNMP security modes and levels are shown in the following table. Select the security mode and level that will be used to communicate between the SNMP agent and manager.

Protocol Version	UI Setting	Authentication	Encryption	Method
SNMP V1, V2c	V1, V2c Read Community	Community string	No	Uses a community string match for authentication.
	V1, V2c Write/Read Community	Community string	No	Uses a community string match for authentication.
SNMP V3	No-Auth	No	No	Uses an account with admin or user to access objects
	MD5 or SHA	Authentication based on MD5 or SHA	No	Provides authentication based on HMAC-MD5, or HMAC-SHA algorithms. (Note: The website login password must be at least 8-characters and must be set up in advance)
	MD5 or SHA	Authentication based on MD5 or SHA	Data encryption key	Provides authentication based on HMAC-MD5 or HMAC-SHA algorithms, and data encryption key. (Note: The website login password must be at least 8-characters and must be set up in advance)

These parameters are configured on the SNMP page. A more detailed explanation of each parameter is given below the figure.

**SNMP**

**SNMP Read/Write Settings**

- SNMP Versions: V1, V2c
- V1,V2c Read Community: public
- V1,V2c Write/Read Community: private
- Admin Auth. Type: No-Auth
- Admin Data Encryption Key:
- User Auth. Type: No-Auth
- User Data Encryption Key:

**Trap Settings**

- 1st Trap Server IP/Name:
- 1st Trap Community: public
- 2nd Trap Server IP/Name:
- 2nd Trap Community: public

**Trap Mode**

- Retries(1~99): 3
- Timeout(1~300s): 10

**Private MIB information**

- Switch Object ID: enterprise.8691.7.128

**Activate**

## SNMP Read/Write Settings

### SNMP Versions

Setting	Description	Factory Default
V1, V2c, V3, or V1, V2c, or V3 only	Specifies the SNMP protocol version used to manage the switch.	V1, V2c

### V1, V2c Read Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to authenticate the SNMP agent for read-only access. The SNMP agent will access all objects with read-only permissions using this community string.	Public

### V1, V2c Write/Read Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to authenticate the SNMP agent for read/write access. The SNMP server will access all objects with read/write permissions using this community string.	Private

For SNMP V3, two levels of privilege are available accessing the Moxa switch. **Admin** privilege provides access and authorization to read and write the MIB file. **User** privilege allows reading of the MIB file only.

### Admin Auth. Type (for SNMP V1, V2c, V3, and V3 only)

Setting	Description	Factory Default
No-Auth	Allows the admin account to access objects without authentication.	No
MD5-Auth	Authentication will be based on the HMAC-MD5 algorithms. 8-character passwords are the minimum requirement for authentication.	No
SHA-Auth	Authentication will be based on the HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.	No

### Admin Data Encryption Key (for SNMP V1, V2c, V3, and V3 only)

Setting	Description	Factory Default
Enable	Enables data encryption using either DES, AES 128, or AES 256 encryption.	No
Disable	Specifies that data will not be encrypted.	No

### User Auth. Type (for SNMP V1, V2c, V3 and V3 only)

Setting	Description	Factory Default
No-Auth	Allows the admin account and user account to access objects without authentication.	No
MD5-Auth	Authentication will be based on the HMAC-MD5 algorithms. 8-character passwords are the minimum requirement for authentication.	No
SHA-Auth	Authentication will be based on the HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.	No

### User Data Encryption Key (for SNMP V1, V2c, V3 and V3 only)

Setting	Description	Factory Default
Enable	Enables data encryption using either DES, AES 128, or AED 256 encryption.	No
Disable	No data encryption	No

## Trap Settings

SNMP traps allow an SNMP agent to notify the NMS of a significant event. The switch supports two SNMP modes, **Trap** mode and **Inform** mode.

## SNMP Trap Mode—Trap

In Trap mode, the SNMP agent sends an SNMPv1 trap PDU to the NMS. No acknowledgment is sent back from the NMS so the agent has no way of knowing if the trap reached the NMS.

**Trap Mode**

Trap ▼

Retries(1~99) 3

Timeout(1~300s) 10

## SNMP Trap Mode—Inform

SNMPv2 provides an inform mechanism. When an inform message is sent from the SNMP agent to the NMS, the receiver sends a response to the sender acknowledging receipt of the event. This behavior is similar to that of the get and set requests. If the SNMP agent does not receive a response from the NMS for a period of time, the agent will resend the trap to the NMS agent. The maximum timeout time is 300 sec (default is 10 seconds), and the maximum number of retries is 99 times (default is 3 times). When the SNMP agent receives acknowledgement from the NMS, it will stop resending the inform messages.

**Trap Mode**

Inform ▼

Retries(1~99) 3

Timeout(1~300s) 10

### 1st Trap Server IP/Name

Setting	Description	Factory Default
IP or name	Specifies the IP address or name of the primary trap server used by your network.	None

### 1st Trap Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to use for authentication.	Public

### 2nd Trap Server IP/Name

Setting	Description	Factory Default
IP or name	Specifies the IP address or name of the secondary trap server used by your network.	None

### 2nd Trap Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to use for authentication.	Public

## Private MIB Information

### Switch Object ID

Setting	Description	Factory Default
Specific Moxa Switch ID	Indicates the Moxa switch's enterprise value.	Depends on switch model type



### NOTE

The Switch Object ID cannot be changed.



# Using PoE (PoE Models Only)

Power over Ethernet has become increasingly popular due in large part to the reliability provided by PoE Ethernet switches that supply the necessary power to Powered Devices (PD) when AC power is not readily available or cost-prohibitive to provide locally.

Power over Ethernet can be used with:

- Surveillance cameras
- Security I/O sensors
- Industrial wireless access points
- Emergency IP phones

In fact, it's not uncommon for video, voice, and high-rate industrial application data transfers to be integrated into one network. Moxa's PoE switches are equipped with many advanced PoE management functions, providing vital security systems with a convenient and reliable Ethernet network. Moreover, Moxa's advanced PoE switches support the high power PoE+ standard, 24 VDC direct power input, and 20 ms fast recovery redundancy, Turbo Ring and Turbo Chain.

Please note that two types of PoE function settings are available, depending on the specific model of switch.

Type	Models Supported
Type 1	TN-5524 Series, TN-5800A Series
Type 2	TN-5508A Series, TN-5510A Series, TN-5516A Series, TN-5518A Series
Type 3	TN-4516A Series, TN-4524A Series, TN-4528A Series

Patent [http://www.moxa.com/doc/operations/Moxa\\_Patent\\_Marking.pdf](http://www.moxa.com/doc/operations/Moxa_Patent_Marking.pdf)

## Type 1

### PoE Setting

The settings are included to give the user control over the system's PoE power budget, PoE port access, PoE port power limit and PD failure check.

An explanation of each configuration item follows:

### PoE Power Budget

*Indicates the PoE power that can be supplied by the system*

Setting	Description	Factory Default
Auto	Allows users to set the actual Power Limit value by each individual PoE port.	Auto
Manual	The user can set the power limit value that indicates the power supplied by the system.	

## Port Setting

### Enable

Setting	Description	Factory Default
Checked	Allows data and power transmission through the port	Enable
Unchecked	Immediately shuts off port access	Enable

### Power Limit

Setting	Description	Factory Default
Auto	The amount of power assigned is determined according to the class that is read from the powered device.	Auto
Manual	The user can set the power limit value that indicates the maximum amount of power available to the port.	Auto

The PoE Ethernet switch can monitor PD working status via its IP conditions. If the PD fails, the switch will not receive a PD response after the defined period, and the authentication process is restarted. This is an excellent function to ensure your network reliability and reduce management burden.

### PD Failure Check

Setting	Description	Factory Default
Checked	Enables the PD Failure Check function.	Auto
Unchecked	Disables the PD Failure Check function.	Auto

### IP

Setting	Description	Factory Default
Max. 15 Characters	Enter the IP for the PD	None

### Period

Setting	Description	Factory Default
Max. 5 Characters	Enter the time span for IP checking period	None

## PoE Timetabling

Powered devices usually do not need to be running 24 hours a day, 7days a week. The PoE Ethernet switch provides a PoE timetabling mechanism to let users set a flexible working schedule for each PoE port to economize the system's power burden.

### PoE Timetabling

Port 1  Enable

	StartTime	EndTime	
<input type="checkbox"/> MON	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> TUE	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> WED	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> THU	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> FRI	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> SAT	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> SUN	<input type="text" value="0"/>	~ <input type="text" value="24"/>	[ex : 00~24]

### Port

Setting	Description	Factory Default
Port	Enable a dedicated port	Port 1

### Enable

Setting	Description	Factory Default
Checked	Enables the port for a defined time period	Disable
Unchecked	Disables the port for a defined time period	

## Weekly Timetabling

### Day

Setting	Description	Factory Default
Checked	Enables the port for a defined number of days	Disable
Unchecked	Disables the port for a defined number of days	

### Start/End Time

Setting	Description	Factory Default
Time for working period	Allows users to enter the start and end time for the PD's working period	0-24

## PoE Status

PoE Status				
Port	Status	Consumption(W)	Voltage(V)	Current(mA)
1	Enable	0	0	0
2	Enable	0	0	0
3	Enable	0	0	0
4	Enable	0	0	0

Item	Description
Enable/Disable	Indicates the PoE port status
Consumption (W)	Indicates the actual Power consumed value for PoE port
Voltage (V)	Indicates the actual Voltage consumed value for PoE port
Current (mA)	Indicates the actual Current consumed value for PoE port

## PoE Email Warning Events Settings

Since industrial Ethernet devices are often located at the endpoints of a system, these devices do not always know what is happening elsewhere on the network. This means that a PoE port connected to a PD must provide system administrators with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of the PD almost instantaneously when exceptions occur. The PoE Ethernet switch supports different methods for warning engineers automatically, such as email and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarms using email and relay output.

Email Warning Event Types can be divided into two basic groups: Power-Fail and PD-Failure.

PoE Email Warning Events Settings		
Port Events		
Port	Power-Fail	PD-Failure
1	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>

Port Events	Warning e-mail is sent when...
Power-Fail	When actual PD power consumption exceeds related PD power limit setting.
PD-Failure	When the switch cannot receive a PD response after the defined period.

## PoE Relay Warning Events Settings

Relay Warning Event Types can be divided into two basic groups: Power-Fail and PD-Failure.

### PoE Relay Warning Events Settings

Port Events

Port	Power-Fail	PD-Failure
1	Disable ▾	Disable ▾
2	Disable ▾	Disable ▾
3	Disable ▾	Disable ▾
4	Disable ▾	Disable ▾

Activate

Port Events	Warning e-mail is sent when...
Power-Fail	When actual PD power consumption exceeds related PD power limit settings.
PD-Failure	When the switch cannot receive a PD response after the defined period.

## Type 2

### PoE Setting

The setting are included to give the user control over the system's PoE power output, PoE power threshold, PoE port configuration, and PD failure check.

An explanation of each configuration item follows:

### PoE Settings

PoE System Configuration

PoE power output	Enable ▾
PoE power Budget	120 Watts
PoE power threshold	120 Watts
PoE threshold cutoff	Disable ▾
Sum of allocated power	0 Watts
Sum of measured power	0 Watts

Activate

### PoE Port Configuration

Port	Power	Output Mode	Power Allocation	Legacy PD Detection
1	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>
2	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>
3	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>
4	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>
5	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>
6	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>
7	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▼	0	<input type="checkbox"/>

Activate

### PoE Device Failure Check

Port	Enable	PoE Device Failure Check	No Response Timeout (Cycles 1~10)	Check Period (Seconds 5~300)	No Response Action
1	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼
2	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼
3	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼
4	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼
5	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼
6	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼
7	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▼

Activate

## PoE System Configuration

### PoE power output

Setting	Description	Factory Default
Enable	Enables power transmission to PD	Enable
Disable	Disables power transmission to PD	

### PoE power budget

Setting	Description	Factory Default
120	It shows the total PoE power budget of the switch	120

### PoE power threshold

Setting	Description	Factory Default
30 to 120	Set the threshold of total PoE power output	120

### PoE threshold cutoff

Setting	Description	Factory Default
Enable	Cutoff the PD's power while its over the threshold	Disable
Disable	No cutoff while the PD's power over the threshold	

### Sum of allocated power

Setting	Description
Allocated power	This item shows the total allocated power of PDs

### Sum of measured power

Setting	Description
Measured power	This item shows the total measured power of PDs

## PoE Port Configuration

PoE Port Configuration				
Port	Power	Output Mode	Power Allocation	Legacy PD Detection
1	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
2	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
3	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
4	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
5	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
6	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
7	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
8	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>

### Power

Setting	Description	Factory Default
Checked	Allows data and power transmission through the port	Enable
Unchecked	Immediately shuts off port access	

### Output Mode

Setting	Description	Factory Default
802.3 af/at Auto	Power transmission on IEEE 802.3 af/at protocols. The acceptable PD resistance range is 17k $\Omega$ to 29k $\Omega$ .	802.3 af/at Auto
High Power	High Power mode provides users a higher power output to PD. The acceptable PD resistance range is 17k $\Omega$ to 29k $\Omega$ , and the power allocation of the port is automatically set to 36 Watts.	
Force	Force mode provides users to output power to a non 802.3 af/at PD. The acceptable PD resistance range is over 2.4k $\Omega$ , and the range of power allocation is 0 to 36 Watts.	

### Power Allocation

Setting	Description	Factory Default
0 to 36	In the Force output mode, the power allocation can be set from 0 to 36 Watts	36

### Legacy PD Detection

The PoE Ethernet Switch provides the **Legacy PD Detection** function. When the capacitance of PD is higher than 2.7 $\mu$ F, checking the **Legacy PD Detection** enables system to output power to PD. If you check the Legacy PD Detection, it will take longer detection time from 10 to 15 seconds before PoE power output.

Setting	Description	Factory Default
Checked	Enables the legacy PD detection	Disable
Unchecked	Disables the legacy PD detection	

## PoE Device Failure Check

The PoE Ethernet Switch can monitor PD working status via its IP conditions. If the PD fails, the switch will not receive a PD response after the defined period, and the authentication process is restarted. This is an excellent function to ensure your network reliability and reduce management burden.

**PoE Device Failure Check**

Port	Enable	PoE Device Failure Check	No Response Timeout (Cycles 1~10)	Check Period (Seconds 5~300)	No Response Action
1	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
2	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
3	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
4	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
5	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
6	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
7	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
8	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>

*Note: The dropdown menu for 'No Response Action' shows: No Action, Reboot PD, Power Off PD.*

### Enable

Setting	Description	Factory Default
Checked	Enables the PD Failure Check function	Enable
Unchecked	Disables the PD Failure Check function	

### PoE Device IP Address

Setting	Description	Factory Default
Max. 15 Characters	Enter the IP for the PD	None

### No Response Timeout

Setting	Description	Factory Default
1 to 10	Enter the cycles for IP checking	3

### Check Period

Setting	Description	Factory Default
5 to 300	Enter the time span for IP checking period	10

### No Response Action

Setting	Description	Factory Default
No Action	The PSE has no action on the PD	No Action
Reboot PD	The PSE reboots the PD after the PD Failure Check	
Power Off PD	The PSE powers off the PD after the PD Failure Check	

## PoE Timetabling

Powered devices usually do not need to be running 24 hours a day, 7 days a week. The PoE Ethernet Switch provides a PoE timetabling mechanism to let users set a flexible working schedule for each PoE port to economize the system's power burden.

### PoE Timetabling

Port 1  Enable

	StartTime	~	EndTime	
<input type="checkbox"/> MON	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> TUE	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> WED	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> THU	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> FRI	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> SAT	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> SUN	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]

### Port

Setting	Description	Factory Default
Port	Enable a dedicated port	Port 1

### Enable

Setting	Description	Factory Default
Checked	Enables the port for a defined time period	Disable
Unchecked	Disables the port for a defined time period	

## Weekly Timetabling

### Day

Setting	Description	Factory Default
Checked	Enables the port for a defined number of days	Disable
Unchecked	Disables the port for a defined number of days	

### Start/End Time

Setting	Description	Factory Default
Time for working period	Allows users to enter the start and end time for the PD's working period	0 to 24



## PoE Warning Event Setting

Since industrial Ethernet devices are often located at the endpoints of a system, these devices do not always know what is happening elsewhere on the network. This means that a PoE port connected to a PD must provide system administrators with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of the PD almost instantaneously when exceptions occur. The PoE Ethernet Switch supports different methods for warning engineers automatically, such as SNMP trap, email, and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarm using email and relay output.

### Warning Type

#### SNMP Trap

Setting	Description	Factory Default
Enable	Enables the SNMP trap function of PoE warning	Disable
Disable	Disables the SNMP trap function of PoE warning	

#### Relay Output

Setting	Description	Factory Default
Enable	Enables the relay output function of PoE warning*	Disable
Disable	Disables the relay output function of PoE warning	

\***Enable (relay 1)** and **Enable (relay 2)** can be selected if the switch supports multi-relay output (i.e., the TN-5500A PoE series).

#### Email

Setting	Description	Factory Default
Enable	Enables the email alarm function of PoE warning	Disable
Disable	Disables the email alarm function of PoE warning	

## Event Type

Port Events	Description
PoE port power on	Power outputs to PD
PoE port power off	Cut off PoE power output
PoE port over-current/short-circuit	When the current of the port exceeds the limitation: 802.3 af – 350mA 802.3 at – 600mA High Power – 720mA Force – 600mA
PD Failure Check (no response)	When the switch cannot receive a PD response after the defined period
Exceed PoE system threshold	When sum of all PD power consumption exceeds the threshold of total PoE power output
Exceed PoE system power budget	When “sum of allocated power” exceeds the PoE power budget
External FET has failed	When the MOSFET of the port is out of order, please contact Moxa for technical service
PSE chip is over temperature	Please check the environmental temperature. If it is over 75oC, please operate the switch at an adequate temperature. If not, please contact Moxa for technical service.
V <sub>EE</sub> (PoE input voltage) under voltage lockout	The voltage of the power supply drops down below 44VDC. Adjust the voltage between 46 and 57VDC to eliminate this issue.



## NOTE

The Relay Output does not support three Event Types: **External FET has failed**, **PSE chip is over temperature**, and **V<sub>EE</sub> (PoE input voltage) under voltage lockout**.

## PoE Diagnose

### PoE Diagnose

**Diagnose Configuration**

Port Number  
 Select All  1  2  3  4  5  6  7  8

**Activate**

Port	Device Type	Classification	Voltage(V)	PoE Port Configuration Suggestion
1	IEEE 802.3af	0	48	Select IEEE 802.3 af/at auto mode
2	IEEE 802.3af	3	48	Select IEEE 802.3 af/at auto mode
3	IEEE 802.3af	0	48	Select IEEE 802.3 af/at auto mode
4	Legacy PoE Device	Unknown	48	Select Force Mode Select high power output
5	NIC	N/A	N/A	Disable PoE power output
6	NIC	N/A	N/A	Disable PoE power output
7	Not Present	N/A	N/A	
8	Not Present	N/A	N/A	

**PoE Diagnose** helps users to figure out the PD conditions, and the system provides users configuration suggestions to select the best setting for the PDs.

Following steps help users to diagnose the PD conditions:

- Step 1:** Check the port numbers which will be diagnosed
- Step 2:** Click **Activate**
- Step 3:** The system shows the selected PD conditions

## Diagnose Configuration

### Port Number

Setting	Description	Factory Default
Checked	Enable the port to diagnose	Unchecked
Unchecked	Disable the port to diagnose	

### Device Type

Item	Description
Not Present	No connection to the port
NIC	An NIC connected to the port
IEEE 802.3 af	An IEEE 802.3 af PD connected to the port
IEEE 802.3 at	An IEEE 802.3 at PD connected to the port
Legacy PoE Device	A legacy PD connected to the port, whose detected voltage is too high or low, or whose detected capacitance is too high.
Unknown	Unknown PD connected to the port

### Classification

Item	Description
N/A	No classification on the port
0 to 4	Class from 0 to 4
Unknown	Unknown class to the port, normally higher than class 4

### Voltage (V)

Item	Description
N/A	No voltage output on the port
Voltage	Display the voltage of the port

### PoE Port Configuration Suggestion

Item	Description
Disable PoE power output	When detecting an NIC or unknown PD, the system suggests disabling PoE power output.
Enable "Legacy PD Detection"	When detecting a higher capacitance of PD, the system suggests enabling <b>Legacy PD Detection</b> .
Select Force Mode	When detecting higher/lower resistance or higher capacitance, the system suggests selecting <b>Force Mode</b> .
Select IEEE 802.3 af/at auto mode	When detecting an IEEE 802.3 af/at PD, the system suggests selecting <b>802.3 af/at Auto</b> mode.
Select high power output	When detecting an unknown classification, the system suggests selecting <b>High Power</b> output.
Raise external power supply voltage > 46 VDC	When detecting the external supply voltage is below 46 V, the system suggests raising the voltage.
Enable PoE function for detection	The system suggests enabling the PoE function.

## PoE Port Status

**PoE Port Status**

**Monitoring Configuration**

Refresh Rate:  seconds (5-300 seconds)

**PSE Status**

V<sub>EE</sub> Voltage:  Volts

**Port Status**

1 2 3 4 5 6 7 8

Status Description

- Not Present
- Powered
- NIC
- Disabled
- Fault
- Legacy Powered
- Potential Legacy PD

Port	Status	Power Output	Class	Current(mA)	Voltage (V)	Consumption (Watts)	PD Failure Check Status
1	Enable	ON	0	107	48	5	Disabled
2	Enable	ON	3	81	48	3	Disabled
3	Enable	ON	0	150	48	7	Disabled
4	Enable	ON	Unknown	17	48	0	Disabled
5	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
6	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
7	Disable	OFF	N/A	N/A	N/A	N/A	Disabled
8	Enable	OFF	N/A	N/A	N/A	N/A	Disabled

### Monitoring Configuration

#### Refresh Rate

Setting	Description	Factory Default
5 to 300	The period of time which the system refreshes the PoE Port Status	5

#### PSE Status

##### V<sub>EE</sub> Voltage

Setting	Description	Factory Default
Read-only	Display the V <sub>EE</sub> supply voltage of PSE	None



### NOTE

The TN-5500A PoE series does not provide V<sub>EE</sub> voltage information.

## PoE Port Status


### Status Description

Item	Description
Not Present	No connection to the port. No PoE power outputs.
Powered	PoE power outputs from the PSE
NIC	System detects an NIC connected to the port. No PoE power outputs.
Disabled	The PoE function of the port is disabled. No PoE power outputs.
Fault	In <b>Force</b> mode, system detects a out-of-range PD
Legacy Powered	In <b>Force</b> mode, system detects a Legacy PD
Potential Legacy PD	In <b>802.3 af/at</b> or <b>High Power</b> mode, system detects a potential legacy PD. No PoE power outputs.

### Port Description

Item	Description
Status	Indicates if the PoE function is enable
Power Output	Indicates the power output of each PoE port
Class	Indicates the classification of each PoE port
Current (mA)	Indicates the actual Current consumed value of each PoE port
Voltage (V)	Indicates the actual Voltage consumed value of each PoE port
Consumption (Watts)	Indicates the actual Power consumed value of each PoE port
PD Failure Check Status	Indicates the PD Failure Check status of each PoE port. Alive: The PD is pinged by system continuously Not Alive: The PD is not pinged by system Disable: The PD Failure Check is not activated

## PoE System Status

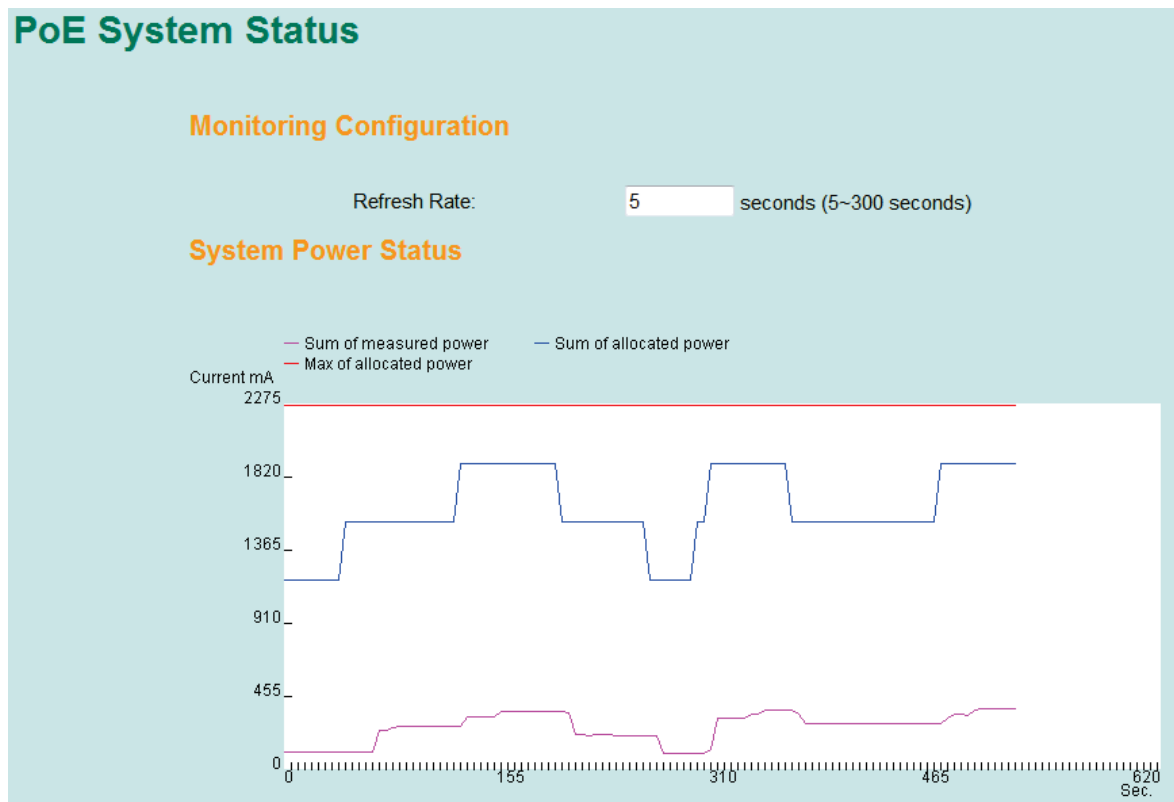

### Monitoring Configuration

#### Refresh Rate

Setting	Description	Factory Default
5 to 300	The period of time which the system refreshes the PoE System Status	5

### System Power Status

System power status allows users to view a graph which includes **Sum of measured power**, **Sum of allocated power**, and **Max of allocated power**. Sum of measured power (in pink color) indicates total measured power of PDs, Sum of allocated power (in blue color) indicates total allocated power, and Max of allocated power (in red color) indicates the threshold of total PoE power output. The graph displays these powers by showing **Current (mA)** versus **Sec. (second)**, and it is refreshed frequently by the Refresh Rate.

# Type 3

## PoE Setting

The settings are included to give the user control over the system's PoE power output, PoE power threshold, PoE port configuration, and PD failure check.

An explanation of each configuration item follows:

### PoE Settings

#### PoE System Configuration

PoE power output Enable ▾

PoE power budget 120 Watts

Sum of allocated power 0 Watts

PoE threshold cutoff Disable ▾

PoE power threshold 120 Watts

Sum of measured power 0 Watts

Activate

#### PoE Port Configuration

Port	Power	Output Mode	Power Allocation	Legacy PD Detection
1	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
2	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
3	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
4	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
5	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
6	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
7	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>
8	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto ▾	0	<input type="checkbox"/>

Activate

#### PoE Device Failure Check

Port	Enable	PoE Device Failure Check	No Response Timeout (Cycles 1~10)	Check Period (Seconds 5~300)	No Response Action
1	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
2	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
3	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
4	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
5	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
6	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
7	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾
8	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action ▾

Activate

### PoE System Configuration

#### PoE power output

Setting	Description	Factory Default
Enable	Enables power transmission to PD	Enable
Disable	Disables power transmission to PD	

**PoE power budget**

Setting	Description	Factory Default
120	It shows the total PoE power budget of the switch	120

**Sum of allocated power**

Setting	Description
Allocated power	This item shows the total allocated power of PDs

**PoE threshold cutoff**

Setting	Description	Factory Default
Enable	Cutoff the PD's power while it is over the threshold	Disable
Disable	No cutoff while the PD's power over the threshold	

**PoE power threshold**

Setting	Description	Factory Default
30 to 240	Set the threshold of total PoE power output	240

**Sum of measured power**

Setting	Description
Measured power	This item shows the total measured power of PDs

**PoE Port Configuration**

**PoE Port Configuration**

Port	Power	Output Mode	Power Allocation	Legacy PD Detection
9	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
10	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
11	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
12	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
13	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
14	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
15	<input checked="" type="checkbox"/> Enable	802.3 af/at Auto	0	<input type="checkbox"/>
16	<input checked="" type="checkbox"/> Enable	Force	0	<input type="checkbox"/>

Class 1 (4 Watts)  
Class 2 (7 Watts)  
Class 3 / 4 af (16 Watts)  
Class 4 at (30 Watts)

Activate

**Power**

Setting	Description	Factory Default
Checked	Allows data and power transmission through the port	Enable
Unchecked	Immediately shuts off port access	

**Output Mode**

Setting	Description	Factory Default
802.3 af/at Auto	Power transmission on IEEE 802.3 af/at protocols. The acceptable PD resistance range is 17kΩ to 29kΩ.	802.3 af/at Auto
Force	Force mode allows users to output power to a non 802.3 af/at PD. The acceptable PD resistance range is over 2.4kΩ, and the range of power allocation can be set to Class 1 (4 W), Class 2 (7 W), Class 3 / 4af (16 W), or Class 4 (30 W).	

**Power Allocation**

Setting	Description	Factory Default
Class 1 to 4	In the Force output mode, the range of power allocation can be set from Class 1 (4 W), Class 2 (7 W), Class 3 / 4af (16 W), or Class 4 (30 W)	Class 1 (4 Watts)

### Legacy PD Detection

The PoE Ethernet Switch provides the **Legacy PD Detection** function. When the capacitance of PD is higher than 2.7μF, checking the **Legacy PD Detection** enables system to output power to PD. If you check the Legacy PD Detection, it will take longer detection time from 10 to 15 seconds before PoE power output.

Setting	Description	Factory Default
Checked	Enables the legacy PD detection	Disable
Unchecked	Disables the legacy PD detection	

### PoE Device Failure Check

The PoE Ethernet Switch can monitor PD working status via its IP conditions. If the PD fails, the switch will not receive a PD response after the defined period, and the authentication process is restarted. This is an excellent function to ensure your network reliability and reduce management burden.

**PoE Device Failure Check**

Port	Enable	PoE Device Failure Check	No Response Timeout (Cycles 1~10)	Check Period (Seconds 5~300)	No Response Action
1	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
2	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
3	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
4	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
5	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
6	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
7	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>
8	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="text"/>

*Note: The dropdown menu for 'No Response Action' shows options: No Action, Reboot PD, Power Off PD.*

#### Enable

Setting	Description	Factory Default
Checked	Enables the PD Failure Check function	Enable
Unchecked	Disables the PD Failure Check function	

#### PoE Device IP Address

Setting	Description	Factory Default
Max. 15 Characters	Enter the IP for the PD	None

#### No Response Timeout

Setting	Description	Factory Default
1 to 10	Enter the cycles for IP checking	3

#### Check Period

Setting	Description	Factory Default
5 to 300	Enter the time span for IP checking period	10

#### No Response Action

Setting	Description	Factory Default
No Action	The PSE has no action on the PD	No Action
Reboot PD	The PSE reboots the PD after the PD Failure Check	
Power Off PD	The PSE powers off the PD after the PD Failure Check	



## PoE Timetabling

Powered devices usually do not need to be running 24 hours a day, 7 days a week. The PoE Ethernet Switch provides a PoE timetabling mechanism to let users set a flexible working schedule for each PoE port to economize the system's power burden.

### PoE Timetabling

Port 1  Enable

	StartTime	~	EndTime	
<input type="checkbox"/> MON	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> TUE	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> WED	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> THU	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> FRI	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> SAT	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]
<input type="checkbox"/> SUN	<input type="text" value="0"/>	~	<input type="text" value="24"/>	[ex : 00~24]

### Port

Setting	Description	Factory Default
Port	Enable a dedicated port	Port 1

### Enable

Setting	Description	Factory Default
Checked	Enables the port for a defined time period	Disable
Unchecked	Disables the port for a defined time period	

## Weekly Timetabling

### Day

Setting	Description	Factory Default
Checked	Enables the port for a defined number of days	Disable
Unchecked	Disables the port for a defined number of days	

### Start/End Time

Setting	Description	Factory Default
Time for working period	Allows users to enter the start and end time for the PD's working period	0 to 24

## PoE Warning Event Setting

Since industrial Ethernet devices are often located at the endpoints of a system, these devices do not always know what is happening elsewhere on the network. This means that a PoE port connected to a PD must provide system administrators with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of the PD almost instantaneously when exceptions occur. The PoE Ethernet Switch supports different methods for warning engineers automatically, such as SNMP trap, email, and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarm using email and relay output.

### Warning Type

#### SNMP Trap

Setting	Description	Factory Default
Enable	Enables the SNMP trap function of PoE warning	Disable
Disable	Disables the SNMP trap function of PoE warning	

#### Relay Output

Setting	Description	Factory Default
Enable	Enables the relay output function of PoE warning*	Disable
Disable	Disables the relay output function of PoE warning	

\***Enable (relay 1)** and **Enable (relay 2)** can be selected if the switch supports multi-relay output.

#### Email

Setting	Description	Factory Default
Enable	Enables the email alarm function of PoE warning	Disable
Disable	Disables the email alarm function of PoE warning	

## Event Type

Port Events	Description
PoE port power on	Power outputs to PD
PoE port power off	Cut off PoE power output
PoE port over-current/short-circuit	When the current of the port exceeds the limitation: 802.3 af – 350mA 802.3 at – 600mA High Power – 720mA Force – 600mA
PD Failure Check (no response)	When the switch cannot receive a PD response after the defined period
Exceed PoE system threshold	When sum of all PD power consumption exceeds the threshold of total PoE power output
Exceed PoE system power budget	When “sum of allocated power” exceeds the PoE power budget
External FET has failed	When the MOSFET of the port is out of order, please contact Moxa for technical service
PSE chip is over temperature	Please check the environmental temperature. If it is over 75oC, please operate the switch at an adequate temperature. If not, please contact Moxa for technical service.
V <sub>EE</sub> (PoE input voltage) under voltage lockout	The voltage of the power supply drops down below 44VDC. Adjust the voltage between 46 and 57VDC to eliminate this issue.



## NOTE

The Relay Output does not support three Event Types: **External FET has failed**, **PSE chip is over temperature**, and **V<sub>EE</sub> (PoE input voltage) under voltage lockout**.

## PoE Diagnose

### PoE Diagnose

**Diagnose Configuration**

Port Number  
 Select All     1     2     3     4     5     6     7     8

**Activate**

Port	Device Type	Classification	Voltage(V)	PoE Port Configuration Suggestion
1	IEEE 802.3af	0	48	Select IEEE 802.3 af/at auto mode
2	IEEE 802.3af	3	48	Select IEEE 802.3 af/at auto mode
3	IEEE 802.3af	0	48	Select IEEE 802.3 af/at auto mode
4	Legacy PoE Device	Unknown	48	Select Force Mode Select high power output
5	NIC	N/A	N/A	Disable PoE power output
6	NIC	N/A	N/A	Disable PoE power output
7	Not Present	N/A	N/A	
8	Not Present	N/A	N/A	

**PoE Diagnose** helps users to figure out the PD conditions, and the system provides users configuration suggestions to select the best setting for the PDs.

Following steps help users to diagnose the PD conditions:

**Step 1:** Check the port numbers which will be diagnosed

**Step 2:** Click **Activate**

**Step 3:** The system shows the selected PD conditions

## Diagnose Configuration

### Port Number

Setting	Description	Factory Default
Checked	Enable the port to diagnose	Unchecked
Unchecked	Disable the port to diagnose	

### Device Type

Item	Description
Not Present	No connection to the port
NIC	An NIC connected to the port
IEEE 802.3 af	An IEEE 802.3 af PD connected to the port
IEEE 802.3 at	An IEEE 802.3 at PD connected to the port
Legacy PoE Device	A legacy PD connected to the port, whose detected voltage is too high or low, or whose detected capacitance is too high.
Unknown	Unknown PD connected to the port

### Classification

Item	Description
N/A	No classification on the port
0 to 4	Class from 0 to 4
Unknown	Unknown class to the port, normally higher than class 4

### Voltage (V)

Item	Description
N/A	No voltage output on the port
Voltage	Display the voltage of the port

### PoE Port Configuration Suggestion

Item	Description
Disable PoE power output	When detecting an NIC or unknown PD, the system suggests disabling PoE power output.
Enable "Legacy PD Detection"	When detecting a higher capacitance of PD, the system suggests enabling <b>Legacy PD Detection</b> .
Select Force Mode	When detecting higher/lower resistance or higher capacitance, the system suggests selecting <b>Force Mode</b> .
Select IEEE 802.3 af/at auto mode	When detecting an IEEE 802.3 af/at PD, the system suggests selecting <b>802.3 af/at Auto</b> mode.
Select high power output	When detecting an unknown classification, the system suggests selecting <b>High Power</b> output.
Raise external power supply voltage > 46 VDC	When detecting the external supply voltage is below 46 V, the system suggests raising the voltage.
Enable PoE function for detection	The system suggests enabling the PoE function.

## PoE Port Status

**PoE Port Status**

**Monitoring Configuration**

Refresh Rate:  seconds (5~300 seconds)

**Port Status**

1○ 2○ 3○ 4○ 5○ 6○ 7○ 8○  
9○ 10○ 11○ 12○ 13○ 14○ 15○ 16○

**Status Description**

- Not Present
- Powered
- NIC
- Disabled
- Fault
- Legacy Powered
- Potential Legacy PD

Port	Status	Power Output	Class	Current(mA)	Voltage (V)	Consumption (Watts)	PD Failure Check Status
1	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
2	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
3	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
4	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
5	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
6	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
7	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
8	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
9	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
10	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
11	Enable	OFF	N/A	N/A	N/A	N/A	Disabled
12	Enable	OFF	N/A	N/A	N/A	N/A	Disabled

### Monitoring Configuration

#### Refresh Rate

Setting	Description	Factory Default
5 to 300	The period of time which the system refreshes the PoE Port Status	5


#### Status Description

Item	Description
Not Present	No connection to the port. No PoE power outputs.
Powered	PoE power outputs from the PSE
NIC	System detects an NIC connected to the port. No PoE power outputs.
Disabled	The PoE function of the port is disabled. No PoE power outputs.
Fault	In <b>Force</b> mode, system detects an out-of-range PD
Legacy Powered	In <b>Force</b> mode, system detects a Legacy PD
Potential Legacy PD	In <b>802.3 af/at</b> or <b>High Power</b> mode, system detects a potential legacy PD. No PoE power outputs.

#### Port Description

Item	Description
Status	Indicates if the PoE function is enable
Power Output	Indicates the power output of each PoE port
Class	Indicates the classification of each PoE port
Current (mA)	Indicates the actual Current consumed value of each PoE port
Voltage (V)	Indicates the actual Voltage consumed value of each PoE port
Consumption (Watts)	Indicates the actual Power consumed value of each PoE port
PD Failure Check Status	Indicates the PD Failure Check status of each PoE port. Alive: The PD is pinged by system continuously Not Alive: The PD is not pinged by system Disable: The PD Failure Check is not activated

## PoE System Status

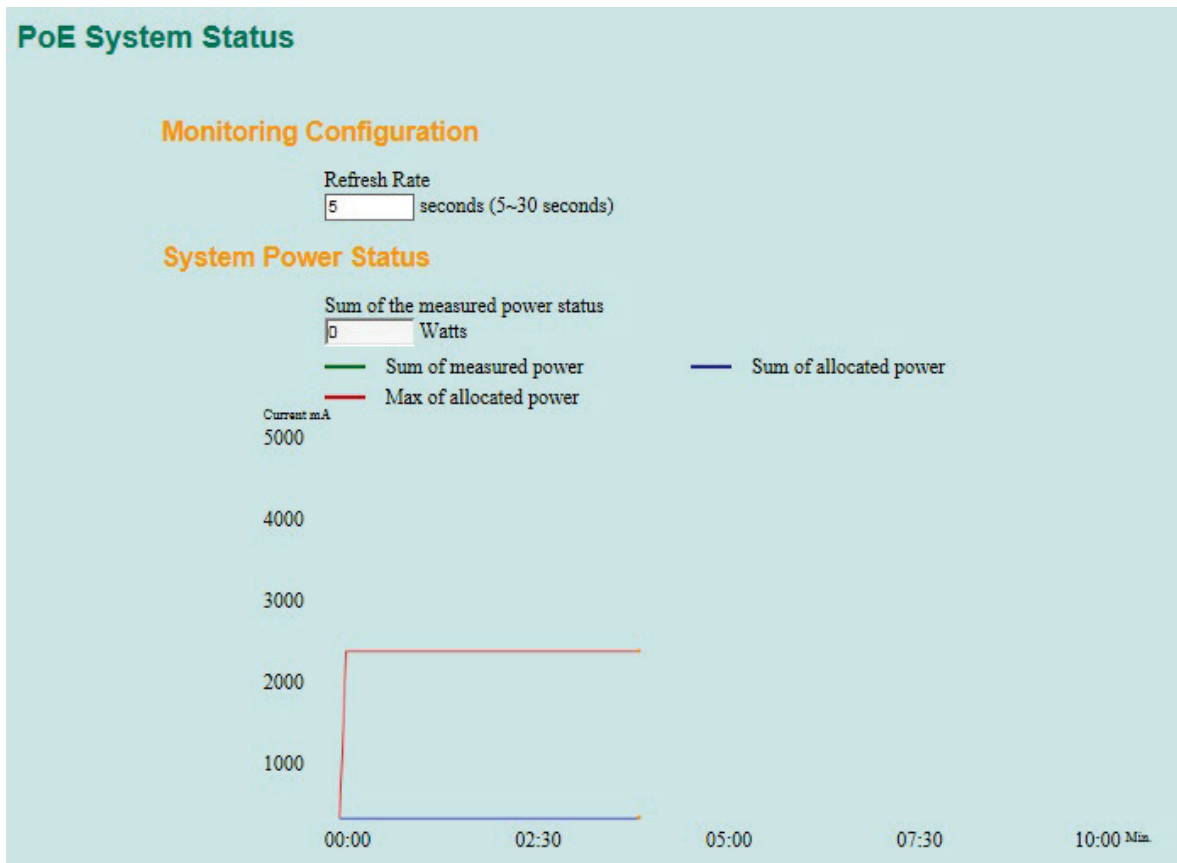

### Monitoring Configuration

#### Refresh Rate

Setting	Description	Factory Default
5 to 30	The period of time which the system refreshes the PoE System Status	5

### System Power Status

System power status allows users to view a graph which includes **Sum of measured power**, **Sum of allocated power**, and **Max of allocated power**. Sum of measured power (in pink color) indicates total measured power of PDs, Sum of allocated power (in blue color) indicates total allocated power, and Max of allocated power (in red color) indicates the threshold of total PoE power output. The graph displays these powers by showing **Current (mA)** versus **Sec. (second)**, and it is refreshed frequently by the Refresh Rate.

## Using Traffic Prioritization

The Moxa switch's traffic prioritization capability provides Quality of Service (QoS) to your network by making data delivery more reliable. You can prioritize traffic on your network to ensure that high priority data is transmitted with minimum delay. Traffic can be controlled by a set of rules to obtain the required Quality of Service for your network. The rules define different types of traffic and specify how each type should be treated as it passes through the switch. The Moxa switch can inspect both IEEE 802.1p/1Q layer 2 CoS tags, and even layer 3 TOS information to provide consistent classification of the entire network. The Moxa switch's QoS capability improves the performance and determinism of industrial networks for mission critical applications.

# The Traffic Prioritization Concept

Traffic prioritization allows you to prioritize data so that time-sensitive and system-critical data can be transferred smoothly and with minimal delay over a network. The benefits of using traffic prioritization are:

- Improve network performance by controlling a wide variety of traffic and managing congestion.
- Assign priorities to different categories of traffic. For example, set higher priorities for time-critical or business-critical applications.
- Provide predictable throughput for multimedia applications, such as video conferencing or voice over IP, and minimize traffic delay and jitter.
- Improve network performance as the amount of traffic grows. Doing so will reduce costs since it will not be necessary to keep adding bandwidth to the network.

Traffic prioritization uses the four traffic queues that are present in your Moxa switch to ensure that high priority traffic is forwarded on a different queue from lower priority traffic. Traffic prioritization provides Quality of Service (QoS) to your network.

Moxa switch traffic prioritization depends on two industry-standard methods:

- **IEEE 802.1D**—a layer 2 marking scheme.
- **Differentiated Services (DiffServ)**—a layer 3 marking scheme.

## IEEE 802.1D Traffic Marking

The IEEE Std 802.1D, 1998 Edition marking scheme, which is an enhancement to IEEE Std 802.1D, enables Quality of Service on the LAN. Traffic service levels are defined in the IEEE 802.1Q 4-byte tag, which is used to carry VLAN identification as well as IEEE 802.1p priority information. The 4-byte tag immediately follows the destination MAC address and Source MAC address.

The IEEE Std 802.1D, 1998 Edition priority marking scheme assigns an IEEE 802.1p priority level between 0 and 7 to each frame. The priority marking scheme determines the level of service that this type of traffic should receive. Refer to the table below for an example of how different traffic types can be mapped to the eight IEEE 802.1p priority levels.

IEEE 802.1p Priority Level	IEEE 802.1D Traffic Type
0	Best Effort (default)
1	Background
2	Standard (spare)
3	Excellent Effort (business critical)
4	Controlled Load (streaming multimedia)
5	Video (interactive media); less than 100 milliseconds of latency and jitter
6	Voice (interactive voice); less than 10 milliseconds of latency and jitter
7	Network Control Reserved traffic

Even though the IEEE 802.1D standard is the most widely used prioritization scheme in the LAN environment, it still has some restrictions:

- It requires an additional 4-byte tag in the frame, which is normally optional for Ethernet networks. Without this tag, the scheme cannot work.
- The tag is part of the IEEE 802.1Q header, so to implement QoS at layer 2, the entire network must implement IEEE 802.1Q VLAN tagging.
- It is only supported on a LAN and not across routed WAN links, since the IEEE 802.1Q tags are removed when the packets pass through a router.

## Differentiated Services (DiffServ) Traffic Marking

DiffServ is a Layer 3 marking scheme that uses the DiffServ Code Point (DSCP) field in the IP header to store the packet priority information. DSCP is an advanced intelligent method of traffic marking that allows you to choose how your network prioritizes different types of traffic. DSCP uses 64 values that map to user-defined service levels, allowing you to establish more control over network traffic.

The advantages of DiffServ over IEEE 802.1D are:

- You can configure how you want your switch to treat selected applications and types of traffic by assigning various grades of network service to them.
- No extra tags are required in the packet.
- DSCP uses the IP header of a packet to preserve priority across the Internet.
- DSCP is backwards compatible with IPV4 TOS, which allows operation with existing devices that use a layer 3 TOS enabled prioritization scheme.

## Traffic Prioritization

Moxa switches classify traffic based on layer 2 of the OSI 7 layer model, and the switch prioritizes received traffic according to the priority information defined in the received packet. Incoming traffic is classified based upon the IEEE 802.1D frame and is assigned to the appropriate priority queue based on the IEEE 802.1p service level value defined in that packet. Service level markings (values) are defined in the IEEE 802.1Q 4-byte tag, and consequently traffic will only contain 802.1p priority markings if the network is configured with VLANs and VLAN tagging. The traffic flow through the switch is as follows:

- Because the 802.1p priority levels are fixed to the traffic queues, the packet will be placed in the appropriate priority queue, ready for transmission through the appropriate egress port. When the packet reaches the head of its queue and is about to be transmitted, the device determines whether or not the egress port is tagged for that VLAN. If it is, then the new 802.1p tag is used in the extended 802.1D header.
- The Moxa switch will check a packet received at the ingress port for IEEE 802.1D traffic classification, and then prioritize it based on the IEEE 802.1p value (service levels) in that tag. It is this 802.1p value that determines which traffic queue the packet is mapped to.

### ***TN-4500A Series***

If the packet is untagged, it will be assigned a PCP value of zero. Tagged packets will be prioritized based on the original assigned 802.1p tag (for firmware versions prior to v3.10 build 21092813).

If the packet is untagged, it will be prioritized according to the port priority. Tagged packets will be prioritized based on the original assigned 802.1p tag (for firmware versions after v3.10 build 21092813).

### ***TN-5508A, TN-5510A Series***

Depending on whether the TOS/COS Inspect function is enabled or disabled, packets will behave differently. The Switch will prioritize packets according to the TOS, COS, and port priority settings.

If TOS Inspect is enabled, the packet will be prioritized according to the TOS field value. Refer to the TOS/DiffServ Mapping table for an overview of TOS values. For example, TOS value 0x00, 0x63 will map to low, normal priority queues respectively. These TOS values translate to PCP values 1, 3 respectively

If COS Inspect is enabled and the packet is tagged, the packet will be prioritized based on the original assigned 802.1p tag.

If COS Inspect is enabled but the packet is untagged, the packet will be prioritized according to the port priority.

If both TOS/COS Inspect are disabled, the packet will be prioritized according to the port priority.

### ***TN- 5516A, TN-5518A Series***

If the packet is untagged, it will be assigned a PCP value of zero. Tagged packets will be prioritized based on the original assigned 802.1p tag.



## Traffic Queues

The hardware of Moxa switches has multiple traffic queues that allow packet prioritization to occur. Higher priority traffic can pass through the Moxa switch without being delayed by lower priority traffic. As each packet arrives in the Moxa switch, it passes through any ingress processing (which includes classification, marking/re-marking), and is then sorted into the appropriate queue. The switch then forwards packets from each queue. Moxa switches support two different queuing mechanisms:

- **Weight Fair:** This method services all the traffic queues, giving priority to the higher priority queues. Under most circumstances, the Weight Fair method gives high priority precedence over low priority, but in the event that high priority traffic does not reach the link capacity, lower priority traffic is not blocked.
- **Strict:** This method services high traffic queues first; low priority queues are delayed until no more high priority data needs to be sent. The Strict method always gives precedence to high priority over low priority.

## Configuring Traffic Prioritization

Quality of Service (QoS) provides a traffic prioritization capability to ensure that important data is delivered consistently and predictably. The Moxa switch can inspect IEEE 802.1p/1Q layer 2 CoS tags, and even layer 3 TOS information, to provide a consistent classification of the entire network. The Moxa switch's QoS capability improves your industrial network's performance and determinism for mission critical applications.

### QoS Classification

There are two QoS classification settings depending on the specific model of the switch.

Type	Models Supported
Type 1	TN-5508A Series, TN-5510A Series, TN-4516A Series, TN-4524A Series, TN-4528A Series
Type 2	TN-5516A Series, TN-5518A Series, TN-5800A Series

#### Type1

**QoS Classification**

Queuing Mechanism: Weight Fair(8:4:2:1) ▼

Port	Inspect ToS	Inspect CoS	Port Priority
1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼
8	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3(Normal) ▼

The Moxa switch supports inspection of layer 3 TOS and/or layer 2 CoS tag information to determine how to classify traffic packets.

### Queuing Mechanism

Setting	Description	Factory Default
Weight Fair	The Moxa switch has 4 priority queues. In the weight fair scheme, an 8, 4, 2, 1 weighting is applied to the four priorities. This approach prevents the lower priority frames from being starved of opportunity for transmission with only a slight delay to the higher priority frames.	Weight Fair
Strict	In the Strict-priority scheme, all top-priority frames egress a port until that priority's queue is empty, and then the next lower priority queue's frames egress. This approach can cause the lower priorities to be starved of opportunity for transmitting any frames but ensures that all high priority frames will egress the switch as soon as possible.	

### Inspect TOS

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch for inspecting Type of Service (TOS) bits in the IPV4 frame to determine the priority of each frame.	Enabled

### Inspect COS

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch for inspecting 802.1p COS tags in the MAC frame to determine the priority of each frame.	Enabled

### Inspect Port Priority

Setting	Description	Factory Default
Port priority	The port priority has 4 priority queues. Low, normal, medium, high priority queue option is applied to each port.	3(Normal)



## NOTE

The priority of an ingress frame is determined in the following order:

1. Inspect TOS
2. Inspect CoS
3. Port Priority



## NOTE

The designer can enable these classifications individually or in combination. For instance, if a "hot" higher priority port is required for a network design, **Inspect TOS** and **Inspect CoS** can be disabled. This setting leaves only port default priority active, which results in all ingress frames being assigned the same priority on that port.

## Type 2

### QoS Classification

Queuing Mechanism Weight Fair(8:4:2:1) ▼

Port	Port Highest Priority	Inspect ToS	Inspect CoS
1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
5	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
6	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
7	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
8	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
11	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
13	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Activate

### Queuing Mechanism

Setting	Description	Factory Default
Weight Fair	The Moxa switch has 4 priority queues. In the weight fair scheme, an 8, 4, 2, 1 weighting is applied to the four priorities. This approach prevents the lower priority frames from being starved of opportunity for transmission with only a slight delay to the higher priority frames.	Weight Fair
Strict	In the Strict-priority scheme, all top-priority frames egress a port until that priority's queue is empty, and then the next lower priority queue's frames egress. This approach can cause the lower priorities to be starved of opportunity for transmitting any frames but ensures that all high priority frames will egress the switch as soon as possible.	

### Inspect Port Highest Priority

Setting	Description	Factory Default
Enable/Disable	Enables or disables the priority inspection of each port	Disabled

### Inspect TOS

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch for inspecting Type of Service (TOS) bits in the IPV4 frame to determine the priority of each frame.	Enabled

### Inspect COS

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch for inspecting 802.1p COS tags in the MAC frame to determine the priority of each frame.	Enabled



## NOTE

The priority of an ingress frame is determined in the following order:

1. Port Highest Priority
2. Inspect TOS
3. Inspect CoS

## CoS Mapping

**Mapping Table of CoS Value and Priority Queues**

CoS	Priority Queue
0	Low
1	Low
2	Normal
3	Normal
4	Medium
5	Medium
6	High
7	High

**Activate**

## CoS Value and Priority Queues

Setting	Description	Factory Default
Low/Normal/ Medium/High	Maps different CoS values to 4 different egress queues.	0: Low 1: Low 2: Normal 3: Normal 4: Medium 5: Medium 6: High 7: High

## TOS/DiffServ Mapping

**Mapping Table of ToS (DSCP) Value and Priority Queues**

ToS	Level	ToS	Level	ToS	Level	ToS	Level
0x00(1)	0(Low)	0x04(2)	0(Low)	0x08(3)	0(Low)	0x0C(4)	0(Low)
0x10(5)	0(Low)	0x14(6)	0(Low)	0x18(7)	0(Low)	0x1C(8)	0(Low)
0x20(9)	1(Low)	0x24(10)	1(Low)	0x28(11)	1(Low)	0x2C(12)	1(Low)
0x30(13)	1(Low)	0x34(14)	1(Low)	0x38(15)	1(Low)	0x3C(16)	1(Low)
0x40(17)	2(Normal)	0x44(18)	2(Normal)	0x48(19)	2(Normal)	0x4C(20)	2(Normal)
0x50(21)	2(Normal)	0x54(22)	2(Normal)	0x58(23)	2(Normal)	0x5C(24)	2(Normal)
0x60(25)	3(Normal)	0x64(26)	3(Normal)	0x68(27)	3(Normal)	0x6C(28)	3(Normal)
0x70(29)	3(Normal)	0x74(30)	3(Normal)	0x78(31)	3(Normal)	0x7C(32)	3(Normal)
0x80(33)	4(Medium)	0x84(34)	4(Medium)	0x88(35)	4(Medium)	0x8C(36)	4(Medium)
0x90(37)	4(Medium)	0x94(38)	4(Medium)	0x98(39)	4(Medium)	0x9C(40)	4(Medium)
0xA0(41)	5(Medium)	0xA4(42)	5(Medium)	0xA8(43)	5(Medium)	0xAC(44)	5(Medium)
0xB0(45)	5(Medium)	0xB4(46)	5(Medium)	0xB8(47)	5(Medium)	0xBC(48)	5(Medium)

**Activate**

## ToS (DSCP) Value and Priority Queues

Setting	Description	Factory Default
Low/Normal/ Medium/High	Maps different TOS values to 4 different egress queues.	1 to 16: Low 17 to 32: Normal 33 to 48: Medium 49 to 64: High

# Using Virtual LAN


Setting up Virtual LANs (VLANs) on your Moxa switch increases the efficiency of your network by dividing the LAN into logical segments, as opposed to physical segments. In general, VLANs are easier to manage.

## The Virtual LAN (VLAN) Concept

### What is a VLAN?

A VLAN is a group of devices that can be located anywhere on a network, but which communicate as if they are on the same physical segment. With VLANs, you can segment your network without being restricted by physical connections—a limitation of traditional network design. With VLANs you can segment your network according into:

- **Departmental groups**—You could have one VLAN for the marketing department, another for the finance department, and another for the product development department.
- **Hierarchical groups**—You could have one VLAN for directors, another for managers, and another for general staff.
- **Usage groups**—You could have one VLAN for email users and another for multimedia users.

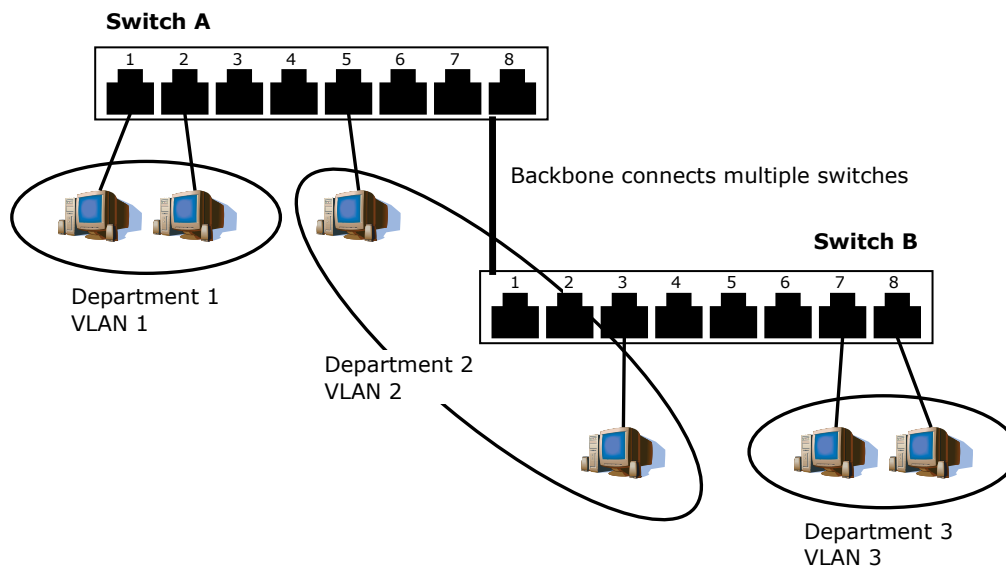

### Benefits of VLANs

The main benefit of VLANs is that they provide a network segmentation system that is far more flexible than traditional networks. Using VLANs also provides you with three other benefits:

- **VLANs ease the relocation of devices on networks:** With traditional networks, network administrators spend much of their time dealing with moves and changes. If users move to a different subnetwork, the addresses of each host must be updated manually. With a VLAN setup, if a host originally on VLAN Marketing, for example, is moved to a port on another part of the network, and retains its original subnet membership, you only need to specify that the new port is on VLAN Marketing. You do not need to do any re-cabling.
- **VLANs provide extra security:** Devices within each VLAN can only communicate with other devices on the same VLAN. If a device on VLAN Marketing needs to communicate with devices on VLAN Finance, the traffic must pass through a routing device or Layer 3 switch.
- **VLANs help control traffic:** With traditional networks, congestion can be caused by broadcast traffic that is directed to all network devices, regardless of whether or not they need it. VLANs increase the efficiency of your network because each VLAN can be set up to contain only those devices that need to communicate with each other.

## VLANS and the Rackmount switch

Your Moxa switch provides support for VLANs using IEEE Std 802.1Q-1998. This standard allows traffic from multiple VLANs to be carried across one physical link. The IEEE Std 802.1Q-1998 standard allows each port on your Moxa switch to be placed as follows:

- On a single VLAN defined in the Moxa switch
- On several VLANs simultaneously using 802.1Q tagging

The standard requires that you define the *802.1Q VLAN ID* for each VLAN on your Moxa switch before the switch can use it to forward traffic:

### Managing a VLAN

A new or initialized Moxa switch contains a single VLAN—the Default VLAN. This VLAN has the following definition:

- *VLAN Name*—Management VLAN
- *802.1Q VLAN ID*—1 (if tagging is required)

All the ports are initially placed on this VLAN, and it is the only VLAN that allows you to access the management software of the Moxa switch over the network.

### Communication Between VLANs

If devices connected to a VLAN need to communicate to devices on a different VLAN, a router or Layer 3 switching device with connections to both VLANs needs to be installed. Communication between VLANs can only take place if they are all connected to a routing or Layer 3 switching device.

### VLANS: Tagged and Untagged Membership

The Moxa switch supports 802.1Q VLAN tagging, a system that allows traffic for multiple VLANs to be carried on a single physical link (backbone, trunk). When setting up VLANs you need to understand when to use untagged and tagged membership of VLANs. Simply put, if a port is on a single VLAN it can be an untagged member, but if the port needs to be a member of multiple VLANs, tagged membership must be defined.

A typical host (e.g., clients) will be untagged members of one VLAN, defined as an **Access Port** in a Moxa switch, while inter-switch connections will be tagged members of all VLANs, defined as a **Trunk Port** in a Moxa switch.

The IEEE Std 802.1Q-1998 defines how VLANs operate within an open packet-switched network. An 802.1Q compliant packet carries additional information that allows a switch to determine which VLAN the port belongs to. If a frame is carrying the additional information, it is known as a *tagged* frame.


To carry multiple VLANs across a single physical link (backbone, trunk), each packet must be tagged with a VLAN identifier so that the switches can identify which packets belong in which VLAN. To communicate between VLANs, a router must be used.

The Moxa switch supports three types of VLAN port settings:

- **Access Port:** The port connects to a single device that is not tagged. The user must define the default port PVID that assigns which VLAN the device belongs to. Once the ingress packet of this Access Port egresses to another Trunk Port (the port needs all packets to carry tag information), the Moxa switch will insert this PVID into this packet so the next 802.1Q VLAN switch can recognize it.
- **Trunk Port:** The port connects to a LAN that consists of untagged devices, tagged devices and/or switches and hubs. In general, the traffic of the Trunk Port must have a Tag. Users can also assign a PVID to a Trunk Port. The untagged packet on the Trunk Port will be assigned the port default PVID as its VID.
- **Hybrid Port:** The port is similar to a Trunk port, except users can explicitly assign tags to be removed from egress packets.

The following section illustrates how to use these ports to set up different applications.

## Sample Applications of VLANs Using Moxa Switches

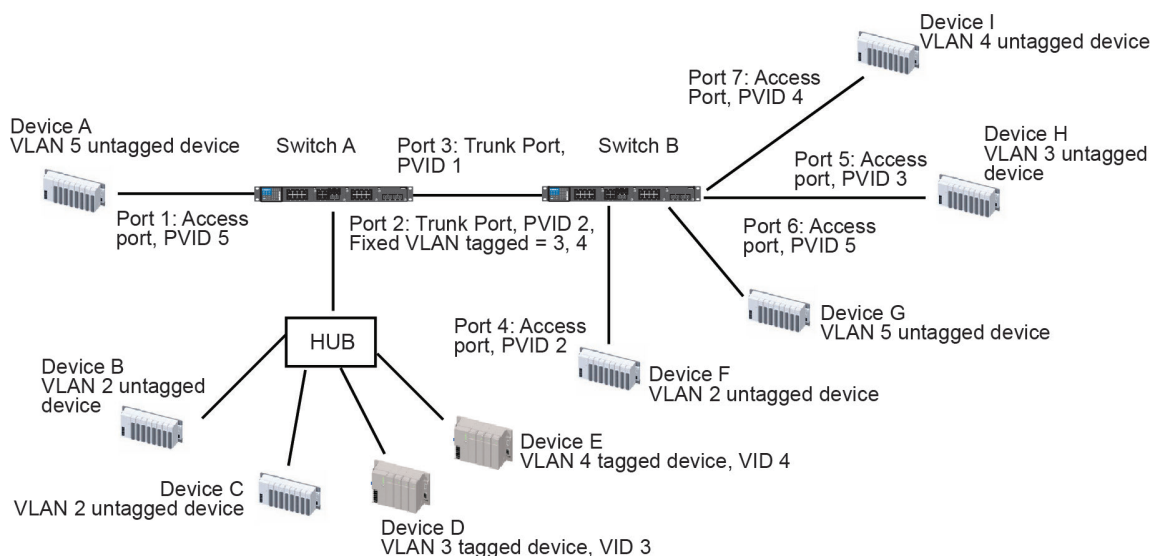

In this application,

- Port 1 connects a single untagged device and assigns it to VLAN 5; it should be configured as **Access Port** with PVID 5.
- Port 2 connects a LAN with two untagged devices belonging to VLAN 2. One tagged device with VID 3 and one tagged device with VID 4. It should be configured as **Trunk Port** with PVID 2 for untagged device and Fixed VLAN (Tagged) with 3 and 4 for tagged device. Since each port can only have one unique PVID, all untagged devices on the same port must belong to the same VLAN.
- Port 3 connects with another switch. It should be configured as **Trunk Port** GVRP protocol will be used through the Trunk Port.
- Port 4 connects a single untagged device and assigns it to VLAN 2; it should be configured as **Access Port** with PVID 2.
- Port 5 connects a single untagged device and assigns it to VLAN 3; it should be configured as **Access Port** with PVID 3.
- Port 6 connect a single untagged device and assigns it to VLAN 5; it should be configured as **Access Port** with PVID 5.
- Port 7 connects a single untagged device and assigns it to VLAN 4; it should be configured as **Access Port** with PVID 4.

After the application is properly configured:

- Packets from Device A will travel through **Trunk Port 3** with tagged VID 5. Switch B will recognize its VLAN, pass it to port 6, and then remove tags received successfully by Device G, and vice versa.
- Packets from Devices B and C will travel through **Trunk Port 3** with tagged VID 2. Switch B recognizes its VLAN, passes it to port 4, and then removes tags received successfully by Device F, and vice versa.
- Packets from Device D will travel through Trunk Port 3 with tagged VID 3. Switch B will recognize its VLAN, pass to port 5, and then remove tags received successfully by Device H. Packets from Device H will travel through **Trunk Port 3** with PVID 3. Switch A will recognize its VLAN and pass it to port 2, but will not remove tags received successfully by Device D.
- Packets from Device E will travel through **Trunk Port 3** with tagged VID 4. Switch B will recognize its VLAN, pass it to port 7, and then remove tags received successfully by Device I. Packets from Device I will travel through **Trunk Port 3** with tagged VID 4. Switch A will recognize its VLAN and pass it to port 2, but will not remove tags received successfully by Device E.

# Configuring Virtual LAN

## VLAN Settings

To configure 802.1Q VLAN and port-based VLANs on the Moxa switch, use the **VLAN Settings** page to configure the ports.

### VLAN Mode

Setting	Description	Factory Default
802.1Q VLAN	Set VLAN mode to 802.1Q VLAN	802.1Q VLAN
Port-based VLAN	Set VLAN mode to Port-based VLAN	

## 802.1Q VLAN Settings

### 802.1Q VLAN Settings

VLAN Mode: 802.1Q VLAN

Management VLAN ID: 1

Enable GVRP:

Port	Type	PVID	Fixed VLAN (Tagged)	Fixed VLAN (Untagged)	Forbidden VLAN
1	Access	1			
2	Trunk	1			
3	Hybrid	1			
4	Access	1			
5	Access	1			
6	Access	1			
7	Access	1			
8	Access	1			

### Management VLAN ID

Setting	Description	Factory Default
VLAN ID from 1 to 4094	Assigns the VLAN ID of this Moxa switch.	1

### Port Type

Setting	Description	Factory Default
Access	Port type is used to connect single devices without tags.	Access
Trunk	Select Trunk port type to connect another 802.1Q VLAN aware switch	
Hybrid	Select Hybrid port to connect another Access 802.1Q VLAN aware switch or another LAN that combines tagged and/or untagged devices and/or other switches/hubs.	



## ATTENTION

For communication redundancy in the VLAN environment, set **Redundant Port Coupling Port** and **Coupling Control Port** as **Trunk Port** since these ports act as the **backbone** to transmit all packets of different VLANs to different Moxa switch units.



**Port PVID**

Setting	Description	Factory Default
VID ranges from 1 to 4094	Sets the default VLAN ID for untagged devices that connect to the port.	1

**Fixed VLAN List (Tagged)**

Setting	Description	Factory Default
VID ranges from 1 to 4094	This field will be active only when selecting the Trunk or Hybrid port type. Set the other VLAN ID for tagged devices that connect to the port. Use commas to separate different VIDs.	None

**Fixed VLAN List (Untagged)**

Setting	Description	Factory Default
VID range from 1 to 4094	This field will be active only when selecting the Hybrid port type. Set the other VLAN ID for tagged devices that connect to the port and tags that need to be removed in egress packets. Use commas to separate different VIDs.	None

**Forbidden VLAN List**

Setting	Description	Factory Default
VID ranges from 1 to 4094	This field will be active only when selecting the Trunk or Hybrid port type. Set the other VLAN IDs that will not be supported by this port. Use commas to separate different VIDs.	None

## Port-Based VLAN Settings

Check each specific port to assign its VLAN ID in the table. The maximum VLAN ID is the same as your number of switch ports.

**Port-based VLAN Settings**

VLAN Mode: Port-based VLAN

VLAN	Port																	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	G1	G2
1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Activate

## Q in Q Setting



### NOTE

Moxa layer 3 switches provide the IEEE 802.1ad QinQ function. This function allows users to tag double VLAN headers into one single Ethernet frame.

### Q in Q Setting

Port	Q in Q Enable	TPID (8100-FFFF, hexadecimal value)
1	<input type="checkbox"/>	8100
2	<input type="checkbox"/>	8100
3	<input type="checkbox"/>	8100
4	<input type="checkbox"/>	8100
5	<input type="checkbox"/>	8100
6	<input type="checkbox"/>	8100
7	<input type="checkbox"/>	8100
8	<input type="checkbox"/>	8100
9	<input type="checkbox"/>	8100
10	<input type="checkbox"/>	8100
11	<input type="checkbox"/>	8100
12	<input type="checkbox"/>	8100
13	<input type="checkbox"/>	8100
14	<input type="checkbox"/>	8100
15	<input type="checkbox"/>	8100
16	<input type="checkbox"/>	8100
17	<input type="checkbox"/>	8100
18	<input type="checkbox"/>	8100
21	<input type="checkbox"/>	8100
22	<input type="checkbox"/>	8100
23	<input type="checkbox"/>	8100
24	<input type="checkbox"/>	8100

**Activate**

#### Q in Q Enable

Setting	Description	Factory Default
Enable/Disable	Enable VLAN QinQ function	Disable

#### TPID

Setting	Description	Factory Default
8100 to FFFF	Assign the TPID of the second VLAN tag	8100

## VLAN Table

VLAN Table				
<b>VLAN Mode</b>				
VLAN Mode 802.1Q VLAN				
<b>Management VLAN</b>				
Management VLAN 1				
<b>Current 802.1Q VLAN List</b>				
Index	VID	Joined Access Port	Joined Trunk Port	Joined Hybrid Port
1	1	1, 4, 5, 6, 7, 8,	2,	3,

VLAN Table		
<b>VLAN Mode</b>		
VLAN Mode Port-based VLAN		
<b>Current Port-based VLAN List</b>		
Index	VLAN	Joined Port
1	1	1, 4, 5, 6, 7, 8,
2	2	2,
3	3	3,

Use the **802.1Q VLAN table** to review the VLAN groups that were created, **Joined Access Ports**, **Trunk Ports**, and **Hybrid Ports**, and use the **Port-based VLAN table** to review the VLAN group and **Joined Ports**.



### NOTE

Most Moxa managed switches have a maximum of 64 VLAN settings.

## Using Multicast Filtering

Multicast filtering improves the performance of networks that carry multicast traffic. This section explains multicasts, multicast filtering, and how multicast filtering can be implemented on your Moxa switch.

### The Concept of Multicast Filtering

#### What is an IP Multicast?

A *multicast* is a packet sent by one host to multiple hosts. Only those hosts that belong to a specific multicast group will receive the multicast. If the network is set up correctly, a multicast can only be sent to an end-station or a subset of end-stations on a LAN or VLAN that belong to the multicast group. Multicast group members can be distributed across multiple subnets, so that multicast transmissions can occur within a campus LAN or over a WAN. In addition, networks that support IP multicast send only *one* copy of the desired information across the network until the delivery path that reaches group members diverges. To make more efficient use of network bandwidth, it is only at these points that multicast packets are duplicated and forwarded. A multicast packet has a multicast group address in the destination address field of the packet's IP header.

## Benefits of Multicast

The benefits of using IP multicast are:


- It uses the most efficient, sensible method to deliver the same information to many receivers with only one transmission.
- It reduces the load on the source (for example, a server) since it will not need to produce several copies of the same data.
- It makes efficient use of network bandwidth and scales well as the number of multicast group members increases.
- Works with other IP protocols and services, such as Quality of Service (QoS).

Multicast transmission makes more sense and is more efficient than unicast transmission for some applications. For example, multicasts are often used for video-conferencing, since high volumes of traffic must be sent to several end-stations at the same time, but where broadcasting the traffic to all end-stations would cause a substantial reduction in network performance. Furthermore, several industrial automation protocols, such as Allen-Bradley, EtherNet/IP, Siemens Profibus, and Foundation Fieldbus HSE (High Speed Ethernet), use multicast. These industrial Ethernet protocols use publisher/subscriber communications models by multicasting packets that could flood a network with heavy traffic. IGMP Snooping is used to prune multicast traffic so that it travels only to those end destinations that require the traffic, reducing the amount of traffic on the Ethernet LAN.

## Multicast Filtering


Multicast filtering ensures that only end-stations that have joined certain groups receive multicast traffic. With multicast filtering, network devices only forward multicast traffic to the ports that are connected to registered end-stations. The following two figures illustrate how a network behaves without multicast filtering, and with multicast filtering.

### Network without multicast filtering

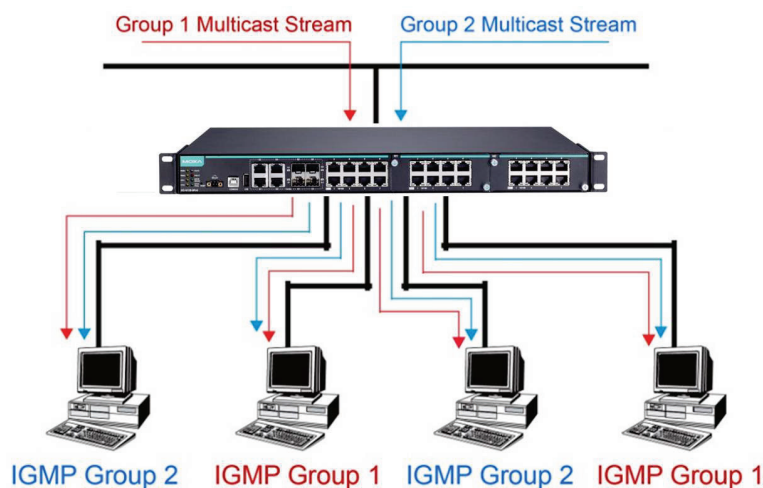

**All hosts receive the multicast traffic, even if they don't need it.**

### Network with multicast filtering

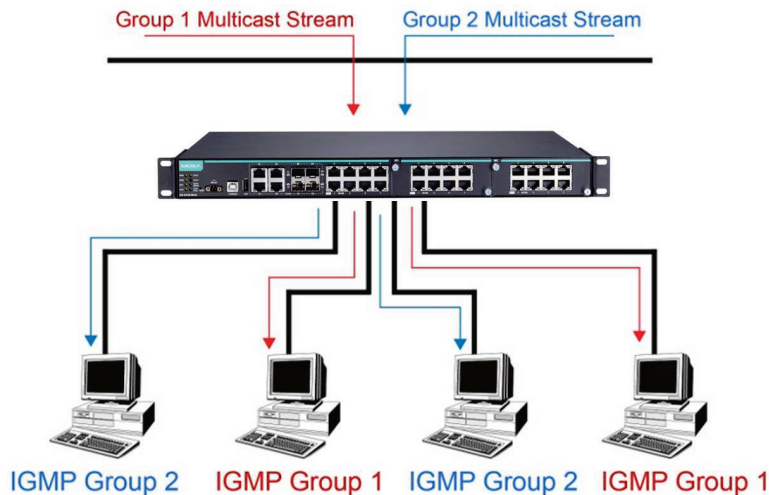

Hosts only receive dedicated traffic from other hosts belonging to the same group.

### Multicast Filtering and Moxa's Industrial Rackmount Switches

The Moxa switch has three ways to achieve multicast filtering: IGMP (Internet Group Management Protocol) Snooping, GMRP (GARP Multicast Registration Protocol), and adding a static multicast MAC manually to filter multicast traffic automatically.

#### Snooping Mode

Snooping Mode allows your switch to forward multicast packets only to the appropriate ports. The switch **snoops** on exchanges between hosts and an IGMP device, such as a router, to find those ports that want to join a multicast group, and then configures its filters accordingly.

#### Query Mode

Query mode allows the Moxa switch to work as the Querier if it has the lowest IP address on the subnetwork to which it belongs.



### NOTE

IGMP Snooping Enhanced mode is only provided in Layer 2 switches.

IGMP querying is enabled by default on the Moxa switch to ensure proceeding query election. Enable query mode to run multicast sessions on a network that does not contain IGMP routers (or queriers). Query mode allows users to enable IGMP snooping by VLAN ID. Moxa switches support IGMP snooping version 1, version 2 and version 3. Version 2 is compatible with version 1. The default setting is IGMP V1/V2. "



### NOTE

Moxa Layer 3 switches are compatible with any device that conforms to the IGMP v2 and IGMP v3 device protocols. Layer 2 switches only support IGMP v1/v2.

## IGMP Multicast Filtering

IGMP is used by IP-supporting network devices to register hosts with multicast groups. It can be used on all LANs and VLANs that contain a multicast capable IP router, and on other network devices that support multicast filtering. Moxa switches support IGMP version 1, 2 and 3. IGMP version 1 and 2 work as follows:

- The IP router (or querier) periodically sends query packets to all end-stations on the LANs or VLANs that are connected to it. For networks with more than one IP router, the router with the lowest IP address is the querier. A switch with IP address lower than the IP address of any other IGMP queriers connected to the LAN or VLAN can become the IGMP querier.
- When an IP host receives a query packet, it sends a report packet back that identifies the multicast group that the end-station would like to join.
- When the report packet arrives at a port on a switch with IGMP Snooping enabled, the switch knows that the port should forward traffic for the multicast group, and then proceeds to forward the packet to the router.
- When the router receives the report packet, it registers that the LAN or VLAN requires traffic for the multicast groups.
- When the router forwards traffic for the multicast group to the LAN or VLAN, the switches only forward the traffic to ports that received a report packet.

IGMP version 3 supports "source filtering," which allows the system to define how to treat packets from specified source addresses. The system can either white-list or black-list specified sources.

### IGMP version comparison

IGMP Version	Main Features	Reference
V1	a. Periodic query	RFC-1112
V2	Compatible with V1 and adds: a. Group-specific query b. Leave group messages c. Resends specific queries to verify leave message was the last one in the group d. Querier election	RFC-2236
V3	Compatible with V1, V2 and adds: a. Source filtering - accept multicast traffic from specified source - accept multicast traffic from any source except the specified source	RFC-3376

## GMRP (GARP Multicast Registration Protocol)

Moxa switches support IEEE 802.1D-1998 GMRP (GARP Multicast Registration Protocol), which is different from IGMP (Internet Group Management Protocol). GMRP is a MAC-based multicast management protocol, whereas IGMP is IP-based. GMRP provides a mechanism that allows bridges and end stations to register or de-register Group membership information dynamically. GMRP functions similarly to GVRP, except that GMRP registers multicast addresses on ports. When a port receives a **GMRP-join** message, it will register the multicast address to its database if the multicast address is not registered, and all the multicast packets with that multicast address are able to be forwarded from this port. When a port receives a **GMRP-leave** message, it will de-register the multicast address from its database, and all the multicast packets with this multicast address will not be able to be forwarded from this port.

## Static Multicast MAC

Some devices may only support multicast packets, but not support either IGMP Snooping or GMRP. The Moxa switch supports adding multicast groups manually to enable multicast filtering.

## Enabling Multicast Filtering

Use the serial console or web interface to enable or disable IGMP Snooping and IGMP querying. If IGMP Snooping is not enabled, then IP multicast traffic is always forwarded, flooding the network.

# Configuring IGMP Snooping

IGMP Snooping provides the ability to prune multicast traffic so that it travels only to those end destinations that require that traffic, thereby reducing the amount of traffic on the Ethernet LAN.

## Layer 2 switch setting page

**IGMP Snooping Setting**  
**Current VLAN List**  
 IGMP Snooping Enable  Query Interval  (s)

Index	VID	IGMP Snooping	Querier	Static Multicast Querier Port
1	1	<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Enable	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16
2	2	<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Enable	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16

## Layer 3 switch setting page

**IGMP Snooping Setting**  
**Current VLAN List**  
 IGMP Snooping Enable  Query Interval  (s)

Index	VID	IGMP Snooping	Querier	Static Multicast Querier Port
1	1	<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Enable <input type="radio"/> V1/V2 <input checked="" type="radio"/> V3	<input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16 <input type="checkbox"/> 17 <input type="checkbox"/> 18 <input type="checkbox"/> 19 <input type="checkbox"/> 20 <input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23 <input type="checkbox"/> 24
2	2	<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Enable <input checked="" type="radio"/> V1/V2 <input type="radio"/> V3	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input checked="" type="checkbox"/> 4 <input checked="" type="checkbox"/> 5 <input checked="" type="checkbox"/> 6 <input checked="" type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16 <input type="checkbox"/> 17 <input type="checkbox"/> 18 <input type="checkbox"/> 19 <input type="checkbox"/> 20 <input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23 <input type="checkbox"/> 24
3	3	<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Enable <input checked="" type="radio"/> V1/V2 <input type="radio"/> V3	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input checked="" type="checkbox"/> 8 <input checked="" type="checkbox"/> 9 <input checked="" type="checkbox"/> 10 <input checked="" type="checkbox"/> 11 <input checked="" type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16 <input type="checkbox"/> 17 <input type="checkbox"/> 18 <input type="checkbox"/> 19 <input type="checkbox"/> 20 <input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23 <input type="checkbox"/> 24
4	4	<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Enable <input checked="" type="radio"/> V1/V2 <input type="radio"/> V3	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input checked="" type="checkbox"/> 13 <input checked="" type="checkbox"/> 14 <input checked="" type="checkbox"/> 15 <input checked="" type="checkbox"/> 16 <input checked="" type="checkbox"/> 17 <input checked="" type="checkbox"/> 18 <input checked="" type="checkbox"/> 19 <input checked="" type="checkbox"/> 20 <input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23 <input type="checkbox"/> 24

### IGMP Snooping Enable

Setting	Description	Factory Default
Enable/Disable	Checkmark the IGMP Snooping Enable checkbox near the top of the window to enable the IGMP Snooping function globally.	Disabled



## NOTE

You should enable IGMP Snooping if the network also uses non-Moxa 3rd party switches.

### Query Interval

Setting	Description	Factory Default
Numerical value, input by the user	Sets the query interval of the Querier function globally. Valid settings are from 20 to 600 seconds.	125 seconds

### IGMP Snooping

Setting	Description	Factory Default
Enable/Disable	Enables or disables the IGMP Snooping function on that particular VLAN.	Enabled if IGMP Snooping is enabled globally

### Querier

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch's querier function.	Enabled if IGMP Snooping is enabled globally
V1/V2 and V3 checkbox	V1/V2: Enables switch to send IGMP snooping version 1 and 2 queries V3: Enables switch to send IGMP snooping version 3 queries	V1/V2

### Static Multicast Querier Port

Setting	Description	Factory Default
Select/Deselect	Select the ports that will connect to the multicast routers. These ports will receive all multicast packets from the source. This option is only active when IGMP Snooping is enabled.	Disabled



## NOTE

If a router or layer 3 switch is connected to the network, it will act as the Querier, and consequently this Querier option will be disabled on all Moxa layer 2 switches.

If all switches on the network are Moxa layer 2 switches, then only one layer 2 switch will act as Querier.

### IGMP Table

The Moxa switch displays the current active IGMP groups that were detected. View IGMP group setting per VLAN ID on this page.

### Layer 2 switch page

**IGMP Group Status**

VID:

Dynamic Router Port	Static Querier Port	Querier Connected Port	Role
			Querier

Index	Group IP	Group MAC	Port	Version	Filter Mode	Sources
-------	----------	-----------	------	---------	-------------	---------



## NOTE

Starting from firmware v3.12, static multicast and IGMP now share a common MAC table to give users more flexibility and a higher capacity for their applications.

The TN-4500A Series has a total of 512 MAC entries shared between static multicast and IGMP.

The TN-5500A Series has a total of 256 MAC entries shared between static multicast and IGMP.



### Layer 3 switch page

#### Current Active IGMP Groups

VID:

Auto Learned Multicast Router Port	Static Multicast Router Port	Querier Connected Port	Act as Querier
	13,14,15,16,17,18,19,20		Yes

Index	Group	Port	Version	Filter Mode	Sources
-------	-------	------	---------	-------------	---------

The information shown in the table includes:

- Auto-learned Multicast Router Port: This indicates that a multicast router connects to/sends packets from these port(s)
- Static Multicast Router Port: Displays the static multicast querier port(s)
- Querier Connected Port: Displays the port which is connected to the querier.
- Act as a Querier: Displays whether or not this VLAN is a querier (winner of a election).

## Current Active IGMP Streams

This page displays the multicast stream forwarding status. It allows you to view the status per VLAN ID.

#### Current Active IGMP Streams

VID:

Index	Stream Group	Stream Source	Port	Member Ports
1	239.255.255.250	192.168.127.131	22	1,2

**Stream Group:** Multicast group IP address

**Stream Source:** Multicast source IP address

**Port:** Which port receives the multicast stream

**Member ports:** Ports the multicast stream is forwarded to.



### NOTE

The IGMP stream table is supported only in Layer 3 switches.

# Static Multicast MAC Addresses

## Layer 2 switch page

### Static Multicast MAC Address

Current Static Multicast MAC Address List

<input checked="" type="checkbox"/> All	Index	MAC Address	Join Port
---	-------	-------------	-----------

**Remove Select**

Add New Static Multicast MAC Address to the List

MAC Address  -  -  -  -  -

Join Port  1-1  1-2  1-3  1-4  1-5  1-6  1-7  1-8  2-1  2-2  2-3  2-4  2-5  
 2-6  2-7  2-8  3-1  3-2  3-3  3-4  3-5  3-6  3-7  3-8  4-1  4-2

**Activate**

## Layer 3 switch page

### Static Multicast MAC Address

Current Static Multicast MAC Address List

<input checked="" type="checkbox"/> All	Index	MAC Address	Join Port
---	-------	-------------	-----------

**Remove Select**

Add New Static Multicast MAC Address to the List

01:00:5E:XX:XX:XX in here is IP multicast MAC address, please activate IGMP Snooping for automatic classification

MAC Address  -  -  -  -  -

Join Port  1  2  3  4  5  6  7  8  9  10  11  12  13  
 14  15  16  17  18  19  20  21  22  23  24

**Activate**



### NOTE

01:00:5E:XX:XX:XX on this page is the IP multicast MAC address. Please activate IGMP Snooping for automatic classification.



## NOTE

Starting from firmware v3.12, static multicast and IGMP now share a common MAC table to give users more flexibility and a higher capacity for their applications.

The TN-4500A Series has a total of 512 MAC entries shared between static multicast and IGMP.

The TN-5500A Series has a total of 256 MAC entries shared between static multicast and IGMP.

### Add New Static Multicast Address to the List

Setting	Description	Factory Default
MAC Address	Input the multicast MAC address of this host.	None

### MAC Address

Setting	Description	Factory Default
Integer	Input the number of the VLAN that the host with this MAC address belongs to.	None

### Join Port

Setting	Description	Factory Default
Select/Deselect	Checkmark the appropriate check boxes to select the join ports for this multicast group.	None

## Configuring GMRP

GMRP is a MAC-based multicast management protocol, whereas IGMP is IP-based. GMRP provides a mechanism that allows bridges and end stations to register or un-register Group membership information dynamically.

Port	GMRP
1-1	<input type="checkbox"/> Enable
1-2	<input type="checkbox"/> Enable
1-3	<input type="checkbox"/> Enable
1-4	<input type="checkbox"/> Enable
1-5	<input type="checkbox"/> Enable
1-6	<input type="checkbox"/> Enable
1-7	<input type="checkbox"/> Enable
1-8	<input type="checkbox"/> Enable
2-1	<input type="checkbox"/> Enable
2-2	<input type="checkbox"/> Enable
2-3	<input type="checkbox"/> Enable
2-4	<input type="checkbox"/> Enable

**Activate**

### GMRP enable

Setting	Description	Factory Default
Enable/Disable	Enables or disables the GMRP function for the port listed in the Port column	Disable

## GMRP Table

The Moxa switch displays the current active GMRP groups that were detected

## GMRP Status

	Multicast Address	Fixed Ports	Learned Ports
1	01-00-5E-00-00-01	1-6,	

Setting	Description
Fixed Ports	This multicast address is defined by static multicast.
Learned Ports	This multicast address is learned by GMRP.

## Multicast Filtering Behavior

### Multicast Filtering Behavior

Port	Multicast Filtering Behavior
1	Forward Unknown
2	Forward Unknown
3	Forward Unknown
4	Forward Unknown
5	Forward Unknown
6	Forward Unknown
7	Forward Unknown
8	Forward Unknown
9	Forward Unknown
10	Forward Unknown
11	Forward Unknown

**Activate**

Setting	Description	Factory Default
Multicast Filtering Behavior	Define the multicast filtering behavior by three options: Forward All: flood all multicast packets to the VLAN of the network. Forward Unknown: flood unknown multicast packets to the VLAN while known multicast packets are sent to the indicated groups. Filter Unknown: drop unknown multicast packets and only send known multicast packets to indicated groups.	Forward Unknown

## Using Bandwidth Management

In general, one host should not be allowed to occupy unlimited bandwidth, particularly when the device malfunctions. For example, so-called "broadcast storms" could be caused by an incorrectly configured topology, or a malfunctioning device. Moxa industrial Ethernet switches not only prevents broadcast storms, but can also be configured to a different ingress rate for all packets, giving administrators full control of their limited bandwidth to prevent undesirable effects caused by unpredictable faults.

## Configuring Bandwidth Management

Please note that two types of bandwidth management settings are available, depending on the specific model of switch.

Type	Models Supported
Type 1	TN-5508A Series, TN-5510A Series
Type 2	TN-5516A Series, TN-5518A Series, TN-5800A Series, TN-4516A Series, TN-4524A Series, TN-4528A Series, TN-5524 Series

## Type 1

### Traffic Rate Limiting Settings

**Traffic Rate Limiting Settings**

Control Mode:

Port	Policy	Ingress Priority Queue Rate			
		Low	Normal	Medium	High
1	Limit Broadcast	8M	8M	8M	8M
2	Limit Broadcast	8M	8M	8M	8M
3	Limit Broadcast	8M	8M	8M	8M
4	Limit Broadcast	8M	8M	8M	8M
5	Limit Broadcast	8M	8M	8M	8M
6	Limit Broadcast	8M	8M	8M	8M
7	Limit Broadcast	8M	8M	8M	8M
G1	Limit Broadcast	8M	8M	8M	8M
G2	Limit Broadcast	8M	8M	8M	8M

Control Mode	Description	Factory Default
Normal	Set the max. ingress rate limit for different packet types	Normal
Port Disable	When the ingress multicast and broadcast packets exceed the ingress rate limit, the port will be disabled for a certain period. During this period, all packets from this port will be discarded.	

### Ingress Rate Limit - Normal

Policy	Description	Factory Default
Limit All	Select the ingress rate limit for different packet types from the following options: Not Limited, 128K, 256K, 512K, 1M, 2M, 4M, 8M	Limit Broadcast 8M
Limit Broadcast, Multicast, Flooded Unicast		
Limit Broadcast, Multicast		
Limit Broadcast		

**Traffic Rate Limiting Settings**

Control Mode:

Port Disable Duration (1~65535s):

Port	Ingress(fps of multicast and broadcast packets.)
1	Not Limited
2	Not Limited
3	Not Limited
4	Not Limited
5	Not Limited
6	Not Limited

### Ingress Rate Limit - Port Disable

Setting	Description	Factory Default
Port disable duration (1~65535 seconds)	When the ingress multicast and broadcast packets exceed the ingress rate limit, the port will be disabled for this period of time. During this time, all packets from this port will be discarded.	30 second

Setting	Description	Factory Default
Ingress (fps)	Select the ingress rate (fps) limit for all packets from the following options: Not Limited, 4464, 7441, 14881, 22322, 37203, 52084, 74405	Not Limited

### Egress Rate Limit

Port	Egress
1	Not Limited ▾
2	Not Limited ▾
3	Not Limited ▾
4	Not Limited ▾
5	Not Limited ▾
6	Not Limited ▾
7	Not Limited ▾
G1	Not Limited ▾
G2	Not Limited ▾
G3	Not Limited ▾

**Activate**

Setting	Description	Factory Default
Egress rate	Select the ingress rate limit (% of max. throughput) for all packets from the following options: Not Limited, 3%, 5%, 10%, 15%, 25%, 35%, 50%, 65%, 85%	Not Limited

## Type 2

### Broadcast Storm Protection

## Broadcast Storm Protection

Broadcast Storm Protection
 

- Include Multicast Packet
- Include Unknown Multicast and Unknown Unicast Packet

**Activate**

Setting	Description	Factory Default
Enable/Disable	This enables or disables Broadcast Storm Protection for unknown broadcast packet globally	Enable
	This enables or disables Broadcast Storm Protection for unknown multicast packets and unicast packets globally	Disable

## Traffic Rate Limiting Settings

**Traffic Rate Limiting Settings**

Control Mode

Port	Ingress	Egress
1	Not Limited	Not Limited
2	Not Limited	Not Limited
3	Not Limited	Not Limited
4	Not Limited	Not Limited
5	Not Limited	Not Limited
6	Not Limited	Not Limited
7	Not Limited	Not Limited
8	Not Limited	Not Limited
9	Not Limited	Not Limited
10	Not Limited	Not Limited
11	Not Limited	Not Limited
12	Not Limited	Not Limited
13	Not Limited	Not Limited
14	Not Limited	Not Limited
15	Not Limited	Not Limited
16	Not Limited	Not Limited

### Ingress and Egress Rate Limit - Normal

Setting	Description	Factory Default
Ingress rate	Select the ingress/egress rate limit (% of max. throughput) for all packets from the following options: Not Limited, 3%, 5%, 10%, 15%, 25%, 35%, 50%, 65%, 85%	Not Limited
Egress rate		

**Traffic Rate Limiting Settings**

Control Mode

Port Disable Duration   
(1~65535s)

Port	Ingress(fps of multicast and broadcast packets.)
1	Not Limited
2	Not Limited
3	Not Limited
4	Not Limited
5	Not Limited
6	Not Limited
7	Not Limited
8	Not Limited
9	Not Limited
10	Not Limited
11	Not Limited
12	Not Limited
13	Not Limited
14	Not Limited
15	Not Limited
16	Not Limited

### Ingress Rate Limit – Port Disable


Setting	Description	Factory Default
Period (1~65535 seconds)	When the ingress packets exceed the ingress rate limit, the port will be disabled for a certain period.	30 seconds
Ingress (frame per second)	Select the ingress rate (fps) limit for all packets from the following options: Not Limited, 4464, 7441, 14881, 22322, 37203, 52084, 74405	Not Limited



**NOTE**

These functions are supported in the TN-4500A series switches.

When a switch receives an unknown unicast packet, it will flood it to all ports in the LAN. The **Unicast Filter Behavior** function provides a mechanism to prevent switch flooding of these unknown unicast packets. Select this check box to activate this filter behavior.

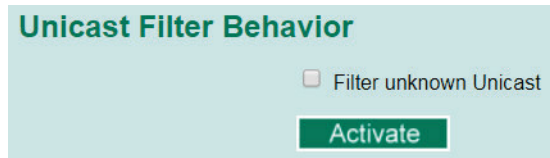

Setting	Description	Factory Default
Enable Filter unknown Unicast	Enable this function to prevent unknown unicast packets from flooding to all ports in the VLAN	Disable

## Using Auto Warning

Since industrial Ethernet devices are often located at the endpoints of a system, these devices will not always know what is happening elsewhere on the network. This means that an industrial Ethernet switch that connects to these devices must provide system maintainers with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of devices almost instantaneously when exceptions occur. The Moxa switch supports different approaches to warn engineers automatically, such as email and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarms by email and relay output.

## Configuring Email Warning

The Auto Email Warning function uses e-mail to alert the user when certain user-configured events take place. Three basic steps are required to set up the Auto Warning function:

### Configure Email Event Types

Select the desired **Event types** from the Console or Web Browser Event type page (a description of each event type is given later in the *Email Alarm Events setting* subsection).

### Configure Email Settings

To configure a Moxa switch’s email setup from the serial, Telnet, or web console, enter your Mail Server IP/Name (IP address or name), Account Name, Account Password, Retype New Password, and the email address to which warning messages will be sent.

### Activate your settings and if necessary, test the email

After configuring and activating your Moxa switch’s Event Types and Email Setup, you can use the **Test Email** function to see if your e-mail addresses and mail server address have been properly configured.



## Configuring Event Types

### Email Warning Events Settings

**System Events**

Switch Cold Start   
  Switch Warm Start   
  Power Transition(On->Off)   
  Power Transition(Off->On)

DI 1(Off)   
  DI 1(On)

Config. Change   
  Auth. Failure   
  Comm. Redundancy Topology Changed

**Port Events**

Port	Link-ON	Link-OFF	Traffic-Overload	Rx-Threshold(%)	Traffic-Duration(s)
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1
8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1

Activate

Event Types can be divided into two basic groups: **System Events** and **Port Events**. System Events are related to the overall function of the switch, whereas Port Events are related to the activity of a specific port.

System Events	Warning e-mail is sent when...
Switch Cold Start	Power is cut off and then reconnected.
Switch Warm Start	Moxa switch is rebooted, such as when network parameters are changed (IP address, subnet mask, etc.).
Power Transition (On→Off)	Moxa switch is powered down.
Power Transition (Off→On)	Moxa switch is powered up.
Configuration Change Activated	Any configuration item has been changed.
Authentication Failure	An incorrect password was entered.
Comm. Redundancy Topology Changed	If any Spanning Tree Protocol switches have changed their position (applies only to the root of the tree). If the Master of the Turbo Ring has changed or the backup path is activated.

Port Events	Warning e-mail is sent when...
Link-ON	The port is connected to another device.
Link-OFF	The port is disconnected (e.g., the cable is pulled out, or the opposing device shuts down).
Traffic-Overload	The port's traffic surpasses the Traffic-Threshold for that port (provided this item is Enabled).
Traffic-Threshold (%)	Enter a nonzero number if the port's Traffic-Overload item is Enabled.
Traffic-Duration (sec.)	A Traffic-Overload warning is sent every Traffic-Duration seconds if the average Traffic-Threshold is surpassed during that time period.



### NOTE

The Traffic-Overload, Traffic-Threshold (%), and Traffic-Duration (sec.) Port Event items are related. If you Enable the Traffic-Overload event, then be sure to enter a nonzero Traffic-Threshold percentage, as well as a Traffic-Duration between 1 and 300 seconds.



## NOTE

The sender of warning e-mail messages will have the following form:

Managed-Redundant-Switch-00000@Switch\_Location

where Managed-Redundant-Switch-00000 is the default Switch Name, 00000 is the Moxa switch's serial number, and Switch\_Location is the default Server Location. Refer to the Basic Settings section to see how to modify Switch Name and Switch Location.

## Configuring Email Settings

### Mail Server IP/Name

Setting	Description	Factory Default
IP address	The IP Address of your email server.	None

### SMTP Port

Setting	Description	Factory Default
SMTP port	Display the SMTP port number	25

### Account Name

Setting	Description	Factory Default
Max. 45 of charters	Your email account.	None

### Password Setting

Setting	Description	Factory Default
Disable/Enable to change password	To reset the password from the Web Browser interface, click the Change password check-box, type the Old password, type the New password, retype the New password, and then click Activate (Max. of 45 characters).	Disable
Old password	Type the current password when changing the password	None
New password	Type new password when enabled to change password; Max. 45 characters.	None
Retype password	If you type a new password in the Password field, you will be required to retype the password in the Retype new password field before updating the new password.	None

### Email Address

Setting	Description	Factory Default
Max. of 30 characters	You can set up to 4 email addresses to receive alarm emails from the Moxa switch.	None

### Send Test Email

After you complete the email settings, you should first click **Activate** to activate those settings, and then press the **Send Test Email** button to verify that the settings are correct.



## NOTE

Auto warning e-mail messages will be sent through an authentication protected SMTP server that supports the CRAM-MD5, LOGIN, and PAIN methods of SASL (Simple Authentication and Security Layer) authentication mechanism.

We strongly recommend not entering your Account Name and Account Password if auto warning e-mail messages can be delivered without using an authentication mechanism.

## Configuring Relay Warning

The Auto Relay Warning function uses relay output to alert the user when certain user-configured events take place. There are two basic steps required to set up the Relay Warning function:

### Configure Relay Event Types

Select the desired **Event types** from the Console or Web Browser Event type page (a description of each event type is given later in the *Relay Alarm Events setting* subsection).

### Activate your settings

After completing the configuration procedure, you will need to activate your Moxa switch's Relay Event Types.

## Configuring Event Types

Port	Link	Traffic-Overload	Rx-Threshold(%)	Traffic-Duration(s)
1	Ignore	Disable	1	1
2	Ignore	Disable	1	1
3	Ignore	Disable	1	1
4	Ignore	Disable	1	1
5	Ignore	Disable	1	1
6	Ignore	Disable	1	1
7	Ignore	Disable	1	1
8	Ignore	Disable	1	1
9	Ignore	Disable	1	1

Event Types can be divided into two basic groups: **System Events** and **Port Events**. System Events are related to the overall function of the switch, whereas Port Events are related to the activity of a specific port.

The Moxa switch supports two relay outputs. You can configure which relay output is related to which events, which helps administrators identify the importance of the different events.

System Events	Warning Relay output is triggered when...
Power Transition (On -> Off)	Moxa switch is powered down
Power Transition (Off -> On)	Moxa switch is powered up
Turbo Ring Break	The Turbo Ring is broken. Only the MASTER switch of Turbo Ring will output warning relay.

Port Events	Warning e-mail is sent when...
Link-ON	The port is connected to another device.
Link-OFF	The port is disconnected (e.g., the cable is pulled out, or the opposing device shuts down).
Traffic-Overload	The port's traffic surpasses the Traffic-Threshold for that port (provided this item is Enabled).
Traffic-Threshold (%)	Enter a nonzero number if the port's Traffic-Overload item is Enabled.
Traffic-Duration (sec.)	A Traffic-Overload warning is sent every Traffic-Duration seconds if the average Traffic-Threshold is surpassed during that time period.

### Override relay alarm settings

Check the checkbox to override the relay warning setting temporarily. Releasing the relay output will allow administrators to fix any problems with the warning condition.



### NOTE

The Traffic-Overload, Traffic-Threshold (%), and Traffic-Duration (sec) Port Event items are related. If you Enable the Traffic-Overload event, then be sure to enter a nonzero Traffic-Threshold percentage, as well as a Traffic-Duration between 1 and 300 seconds.

## Warning List

Use this table to see if any relay alarms have been issued.

Current Warning List		
Index	Event	Relay

## Event Log Settings

This function is used to inform the user what the event log capacity status is and decide what action to take when an event log is oversized. Select the **Enable Log Capacity Warning** checkbox to set the threshold percentage. When the event log capacity is over the percentage, the switch will send a warning message by SNMP Trap or Email.

### Event Log Settings

**Enable Log Capacity Warning at**  (%)

Warning By:  SNMP Trap  Email

**Oversized-Log Event Action :**


## Oversized-Log Event Action

Setting	Description	Factory Default
Overwrite The Oldest Event Log	The oldest event log will be overwritten when the event log exceeds 1000 records.	Overwrite The Oldest Event Log
Stop Recording Event Log	Additional events will not be recorded when the event log exceeds 1000 records.	

## Using Line-Swap-Fast-Recovery

The Line-Swap Fast Recovery function, which is enabled by default, allows the Moxa switch to return to normal operation extremely quickly after devices are unplugged and then re-plugged into different ports. The recovery time is on the order of a few milliseconds (compare this with standard commercial switches for which the recovery time could be on the order of several minutes). To disable the Line-Swap Fast Recovery function, or to re-enable the function after it has already been disabled, access either the Console utility's **Line-Swap recovery** page, or the Web Browser interface's **Line-Swap fast recovery** page, as shown below.

## Configuring Line-Swap Fast Recovery

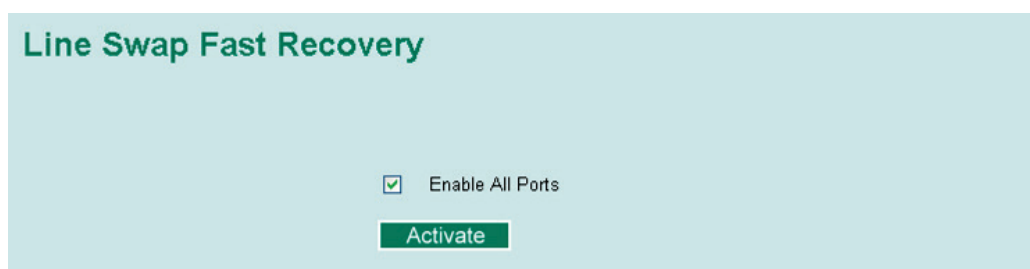

### Enable Line-Swap-Fast-Recovery

Setting	Description	Factory Default
Enable/Disable	Checkmark the checkbox to enable the Line-Swap-Fast-Recovery function	Enable

## DNS Server

Domain Name System (DNS) Server contains a database of IP addresses and their associated hostnames, and it can translate the hostname that DNS client request to an IP address that the host device really is. With DNS server, it is easier to manage IP addresses with easy-to-recognized hostnames.



### NOTE

This function is supported in the TN-4500A and TN-5516A/18A Series switches.

### Enable DNS

Setting	Description	Factory Default
Enable/Disable	Enable or disable DNS server functionality.	Disable

### DNS Reverse Lookup

#### Enable Reverse Lookup

Setting	Description	Factory Default
Enable/Disable	Enable or disable the DNS Reverse Lookup function.	None

### DNS Interface Entry

#### Hostname

Setting	Description	Factory Default
Max. 63 characters	Enter the hostname of the DNS server. NOTE: Only "a-z", "A-Z", "0-9", "-", "." are allowed.	None

#### IP Address

Setting	Description	Factory Default
Max. 15 characters	Enter the IP address of the DNS server.	None



## NOTE

The maximum number of DNS Interface Entries in the TN-4500A Series is 1024, and in TN-5516A/18A Series is 512.

## Using Set Device IP

There are two Set Device IP settings depending on the specific model of the switch.

Type	Models Supported
Type 1	TN-5524 Series
Type 2	TN-5508A Series, TN-5510A Series, TN-5516A Series, TN-5518A Series, TN-5800A Series, TN-4516A Series, TN-4524A Series, TN-4528A Series, TN-5524 Series

To reduce the effort required to set up IP addresses, the Moxa switch comes equipped with DHCP/BootP server and RARP protocol to set up IP addresses of Ethernet-enabled devices automatically.

When enabled, the **Set device IP** function allows the Moxa switch to assign specific IP addresses automatically to connected devices that are equipped with *DHCP Client* or *RARP* protocol. In effect, the Moxa switch acts as a DHCP server by assigning a connected device with a specific IP address stored in its internal memory. Each time the connected device is switched on or rebooted, the Moxa switch sends the device the desired IP address.

Take the following steps to use the **Set device IP** function:


**Step 1:** *Set up the connected devices*

Set up those Ethernet-enabled devices connected to the Moxa switch for which you would like IP addresses to be assigned automatically. The devices must be configured to obtain their IP address automatically.

The devices' configuration utility should include a setup page that allows you to choose an option similar to the Obtain an IP address automatically option.

For example, Windows' TCP/IP Properties window is shown at the right. Although your device's configuration utility may look quite a bit different, this figure should give you some idea of what to look for.

You also need to decide which of the Moxa switch's ports your Ethernet-enabled devices will be connected to. You will need to set up each of these ports separately, as described in the following step.

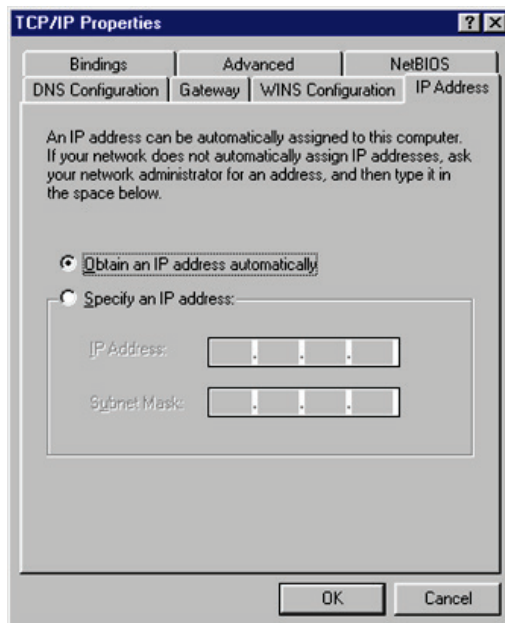

**Step 2:** Configure the Moxa switch's **Set device IP** function, either from the Console utility or from the Web Browser interface. In either case, you simply need to enter the **Desired IP** for each port that needs to be configured.

**Step 3:** Be sure to activate your settings before exiting.

- When using the Web Browser interface, activate by clicking on the Activate button.
- When using the Console utility, activate by first highlighting the **Activate** menu option, and then press **Enter**. You should receive the **Set device IP settings are now active! (Press any key to continue)** message.

# Configuring Set Device IP (Type 1)

## Automatic "Set Device IP" by DHCP/BootP/RARP

**Automatic Set Device IP by DHCP/BootP/RARP**

Port	Device's current IP	Active function	Desired IP address
1-1	NA	--	<input type="text"/>
1-2	NA	--	<input type="text"/>
1-3	NA	--	<input type="text"/>
1-4	NA	--	<input type="text"/>
1-5	NA	--	<input type="text"/>
1-6	NA	--	<input type="text"/>
1-7	NA	--	<input type="text"/>
1-8	NA	--	<input type="text"/>
2-1	NA	--	<input type="text"/>
2-2	NA	--	<input type="text"/>
2-3	NA	--	<input type="text"/>
2-4	NA	--	<input type="text"/>

### Desired IP Address

Setting	Description	Factory Default
IP Address	Set the desired IP of connected devices.	None

Option 82 is used by the relay agent to insert additional information into the client's DHCP request. The Relay Agent Information option is inserted by the DHCP relay agent when forwarding client-originated DHCP packets to a DHCP server. Servers can recognize the Relay Agent Information option and use the information to implement IP addresses to Clients.

When Option 82 is enabled on the switch, a subscriber device is identified by the switch port through which it connects to the network (in addition to its MAC address). Multiple hosts on the subscriber LAN can be connected to the same port on the access switch and are uniquely identified.

The Option 82 information contains 2 sub-options, Circuit ID and Remote ID, which define the relationship between the end device IP and the DHCP Option 82 server. The **Circuit ID** is a 4-byte number generated by the Ethernet switch—a combination of physical port number and VLAN ID. The format of the **Circuit ID** is shown below:

### FF-VV-VV-PP

This is where the first byte "FF" is fixed to "01", the second and the third byte "VV-VV" is formed by the port VLAN ID in hex, and the last byte "PP" is formed by the port number in hex. For example:

01-00-0F-03 is the "Circuit ID" of port number 3 with port VLAN ID 15.

The "Remote ID" identifies the relay agent itself and can be one of the following:

1. The IP address of the relay agent.
2. The MAC address of the relay agent.
3. A combination of IP address and MAC address of the relay agent.
4. A user-defined string.



## Configuring Set Device IP (Type2)

### Automatic "Set Device IP" by DHCP/BootP/RARP

**Automatic Set Device IP by DHCP/BootP/RARP**

Port	IP Address	Netmask	Gateway	DNS Server	NTP Server	Host Name	Domain Name
1	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
2	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
3	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
4	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
5	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
6	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
7	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
8	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
9	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
10	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
11	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
12	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
13	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
14	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
15	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
16	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
17	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		
18	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0	0.0.0.0		

#### IP Address

Setting	Description	Factory Default
IP Address	Set the desired IP address on designated port of connected devices.	None

#### Netmask

Setting	Description	Factory Default
Netmask	Set the netmask to divide an IP address into subnets.	None

#### Gateway

Setting	Description	Factory Default
Gateway	A router interface connected to the local network that sends packets out of the local network.	None

#### DNS Server

Setting	Description	Factory Default
DNS Server	Set the IP address of DNS server used by your network. After specifying the DNS server's IP address, you can use the domain name to open the web console instead of entering the IP address.	None

#### NTP Server

Setting	Description	Factory Default
NTP Server	Set the IP address of NTP server and it will be used to synchronize the clocks of devices.	None

#### Host Name

Setting	Description	Factory Default
Host Name	The host name is used by client for easy distinguish compare to IP address	None

#### Domain Name

Setting	Description	Factory Default
Domain Name	The domain name is used for DHCP client when resolving host name with DNS	None

# Configuring DHCP Relay Agent

## DHCP Relay Agent

**Server IP Address**

1st Server

2nd Server

3rd Server

4th Server

**DHCP Option 82**

Enable Option 82

Type

Value

Display

**DHCP Function Table**

Port	Circuit-ID	Option 82
1-1	01000101	<input type="checkbox"/> Enable
1-2	01000102	<input type="checkbox"/> Enable
1-3	01000103	<input type="checkbox"/> Enable
1-4	01000104	<input type="checkbox"/> Enable
1-5	01000105	<input type="checkbox"/> Enable
1-6	01000106	<input type="checkbox"/> Enable
1-7	01000107	<input type="checkbox"/> Enable

## Server IP Address

### 1st Server

Setting	Description	Factory Default
IP address for the 1st DHCP server	Assigns the IP address of the 1st DHCP server that the switch tries to access.	None

### 2nd Server

Setting	Description	Factory Default
IP address for the 2nd DHCP server	Assigns the IP address of the 2nd DHCP server that the switch tries to access.	None

### 3rd Server

Setting	Description	Factory Default
IP address for the 3rd DHCP server	Assigns the IP address of the 3rd DHCP server that the switch tries to access.	None

### 4th Server

Setting	Description	Factory Default
IP address for the 4th DHCP server	Assigns the IP address of the 4th DHCP server that the switch tries to access.	None

## DHCP Option 82

### Enable Option 82

Setting	Description	Factory Default
Enable or Disable	Enable or disable the DHCP Option 82 function.	Disable

### Type

Setting	Description	Factory Default
IP	Uses the switch's IP address as the remote ID sub.	IP
MAC	Uses the switch's MAC address as the remote ID sub.	IP
Client-ID	Uses a combination of the switch's MAC address and IP address as the remote ID sub.	IP
Other	Uses the user-designated ID sub.	IP

### Value

Setting	Description	Factory Default
Max. 12 characters	Displays the value that was set. Complete this field if type is set to Other.	Switch IP address

### Display

Setting	Description	Factory Default
read-only	The actual hexadecimal value configured in the DHCP server for the Remote-ID. This value is automatically generated according to the Value field. Users cannot modify it.	COA87FFD

## DHCP Function Table

### Enable

Setting	Description	Factory Default
Enable or Disable	Enable or disable the DHCP Option 82 function for this port.	Disable


## Configuring DHCP Filter

In some applications, users do not want DHCP packets to interfere with specific devices or networks, therefore, the DHCP Filter function can help filter the packets from DHCP clients, servers, or both.



### NOTE

This function is supported in the TN-4500A Series switches.

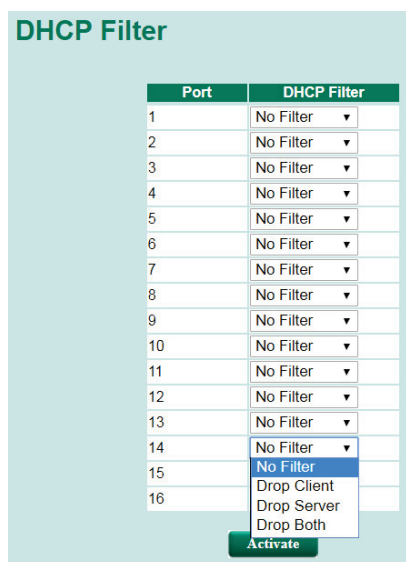

### DHCP Filter

Setting	Description	Factory Default
No Filter	No filter on packets	No Filter
Drop Client	Drop packets from DHCP Clients	
Drop Server	Drop packets from DHCP Servers	
Drop Both	Drop packets from both DHCP Clients and Servers	

# Using Diagnosis

The Moxa switch provides three important tools for administrators to diagnose network systems.

## Mirror Port

The **Mirror Port** function can be used to monitor data being transmitted through a specific port. This is done by setting up another port (the mirror port) to receive the same data being transmitted from, or both to and from, the port under observation. Using a mirror port allows the network administrator to **sniff** the observed port to keep tabs on network activity.

Please note that two types of mirror port behavior are available, depending on the specific model of switch. In Type 1, the mirror port can only receive the same data being transmitted to and from an observation port, but does not allow access to the switch via this port. In Type 2, the mirror port can receive the same data being transmitted to and from an observation port, and also allows the switch to access this port.

Type	Models Supported
Type 1	TN-4516A Series, TN-4524A Series, TN-4528A Series
Type 2	TN-5508A/5510A Series TN-5516A/5518A Series, TN-5916A Series, TN-5800A Series

### Mirror Port Settings

Monitored port:  1  2  3  4  5  6  7  8  
 9  10  11  12  13  14  15  16  
 17  18  19  20  21  22  23  24


Watch direction:

Mirror port:

### Mirror Port Settings

Setting	Description
Monitored Port	Select the number of the ports whose network activity will be monitored.
Watch Direction	Select one of the following two watch direction options: <ul style="list-style-type: none"> <li>Input data stream: Select this option to monitor only those data packets coming into the Moxa switch's port.</li> <li>Output data stream: Select this option to monitor only those data packets being sent out through the Moxa switch's port.</li> <li>Bi-directional: Select this option to monitor data packets both coming into, and being sent out through, the Moxa switch's port.</li> </ul>
Mirror Port	Select the number of the port that will be used to monitor the activity of the monitored port.

# Ping

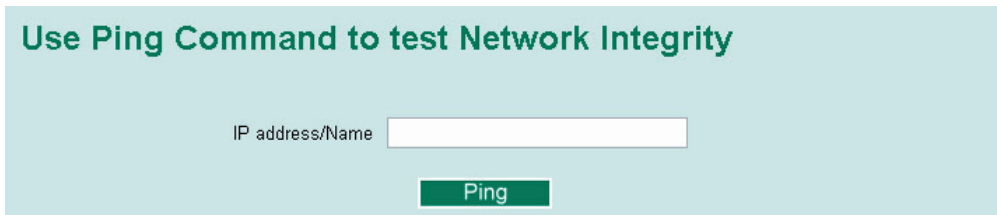


The **Ping** function uses the *ping* command to give users a simple but powerful tool for troubleshooting network problems. The function’s most unique feature is that even though the ping command is entered from the user’s PC keyboard, the actual ping command originates from the Moxa switch itself. In this way, the user can essentially sit on top of the Moxa switch and send ping commands out through its ports.

To use the Ping function, type in the desired IP address, and then press **Enter** from the Console utility, or click **Ping** when using the Web Browser interface.

# LLDP Function


## Overview

LLDP is an OSI Layer 2 protocol defined by IEEE 802.11AB. LLDP standardizes the self-identification advertisement method, and allows each networking device, such as a Moxa managed switch, to periodically send its system and configuration information to its neighbors. Because of this, all LLDP devices are kept informed of each other’s status and configuration, and with SNMP, this information can be transferred to Moxa’s MXview for auto-topology and network visualization.

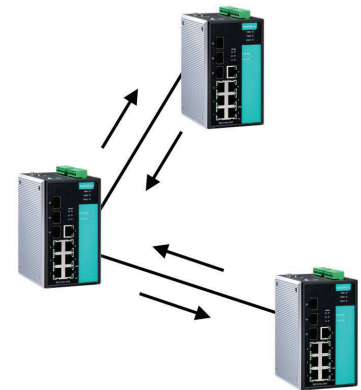

From the switch’s web interface, you can enable or disable LLDP, and set the LLDP transmit interval. In addition, you can view each switch’s neighbor-list, which is reported by its network neighbors. Most importantly, enabling the LLDP function allows Moxa’s MXview to automatically display the network’s topology and system setup details, such as VLAN and Trunking, for the entire network.

## Configuring LLDP Settings

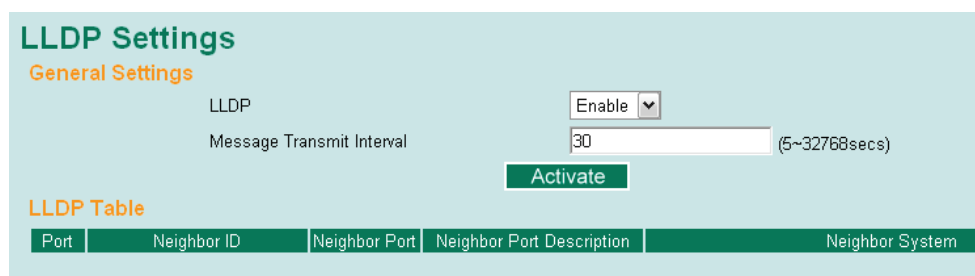

### General Settings

#### LLDP

Setting	Description	Factory Default
Enable or Disable	Enables or disables the LLDP function.	Enable

### Message Transmit Interval

Setting	Description	Factory Default
5 to 32768 sec.	Sets the transmit interval of LLDP messages, in seconds.	30 (seconds)

### LLDP Table

The LLDP Table displays the following information:


<b>Port</b>	The port number that connects to the neighbor device.
<b>Neighbor ID</b>	A unique entity (typically the MAC address) that identifies a neighbor device.
<b>Neighbor Port</b>	The port number of the neighbor device.
<b>Neighbor Port Description</b>	A textual description of the neighbor device's interface.
<b>Neighbor System</b>	Hostname of the neighbor device.

## Using Monitor

You can monitor statistics in real time from the Moxa switch's web console and serial console.


### Monitor by Switch

Access the Monitor by selecting **System** from the left selection bar. Monitor by System allows the user to view a graph that shows the combined data transmission activity of all of the Moxa switch's 18 ports. Click one of the four options—**Total Packets**, **TX Packets**, **RX Packets**, or **Error Packets**—to view transmission activity of specific types of packets. Recall that TX Packets are packets sent out from the Moxa switch, RX Packets are packets received from connected devices, and Error Packets are packets that did not pass TCP/IP's error checking algorithm. The Total Packets option displays a graph that combines TX, RX, and TX Error, RX Error Packets activity. The graph displays data transmission activity by showing **Packets/s** (i.e., packets per second, or pps) versus **sec.** (seconds). In fact, three curves are displayed on the same graph: **Uni-cast** packets (in red color), **Multi-cast** packets (in green color), and **Broad-cast** packets (in blue color). The graph is updated every few seconds, allowing the user to analyze data transmission activity in real-time.

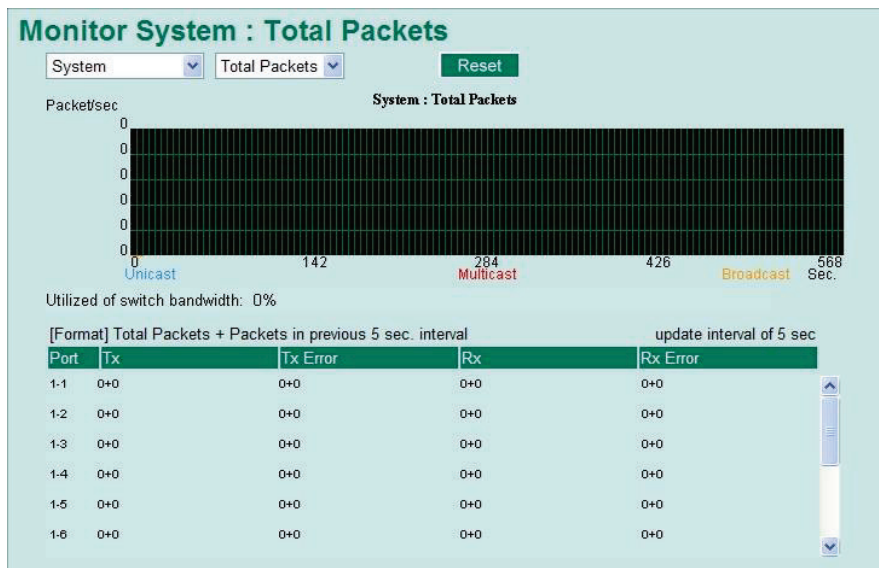


## Monitor by Port

Access the Monitor by Port function by selecting **ALL 10/100M or 1G Ports** or **Port *i***, in which ***i* = 1, 2, ..., G2**, from the left pull-down list. The **Port *i*** options are identical to the Monitor by System function discussed above, in that users can view graphs that show All Packets, TX Packets, RX Packets, or Error Packets activity, but in this case, only for an individual port. The **All Ports** option is essentially a graphical display of the individual port activity that can be viewed with the Console Monitor function discussed above. The All Ports option shows three vertical bars for each port. The height of the bar represents **Packets/s** for the type of packet, at the instant the bar is being viewed. That is, as time progresses, the height of the bar moves up or down so that the user can view the change in the rate of packet transmission. The blue colored bar shows **Uni-cast** packets, the red colored bar shows **Multi-cast** packets, and the orange colored bar shows **Broad-cast** packets. The graph is updated every few seconds, allowing the user to analyze data transmission activity in real-time.

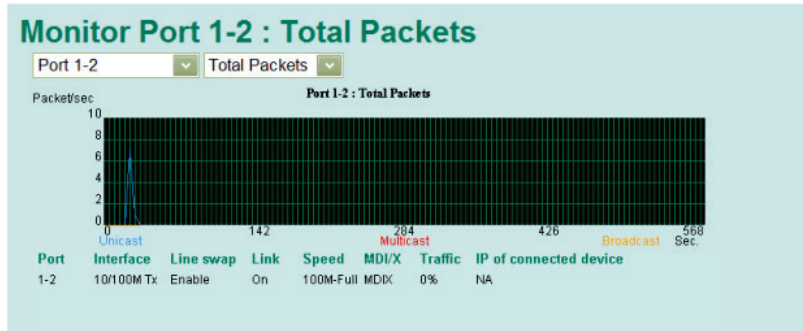

## Using the MAC Address Table

This section explains the information provided by the Moxa switch's MAC address table.

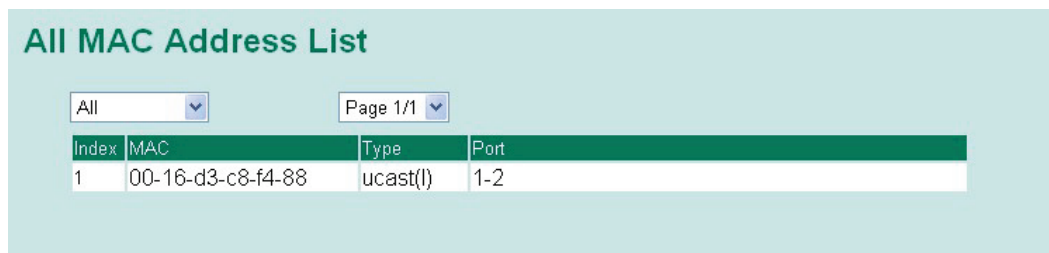

The MAC Address table can be configured to display the following Moxa switch MAC address groups, which are selected from the drop-down list:

<b>ALL</b>	Select this item to show all of the Moxa switch's MAC addresses.
<b>ALL Learned</b>	Select this item to show all of the Moxa switch's Learned MAC addresses.
<b>ALL Static Lock</b>	Select this item to show all of the Moxa switch's Static Lock MAC addresses.
<b>ALL Static</b>	Select this item to show all of the Moxa switch's Static, Static Lock, and Static Multicast MAC addresses.
<b>ALL Static Multicast</b>	Select this item to show all of the Moxa switch's Static Multicast MAC addresses.
<b>Port x</b>	Select this item to show all of the MAC addresses dedicated ports.

The table displays the following information:

<b>MAC</b>	This field shows the MAC address.
<b>Type</b>	This field shows the type of this MAC address.
<b>Port</b>	This field shows the port that this MAC address belongs to.

# Using Access Control List



## NOTE

Access Control Lists are available in TN-4500A Series and TN-5800A Series.

Access control lists (ACL) increase the flexibility and security of networking management.

ACL provides traffic filter capabilities for ingress or egress packets. Moxa access control list helps manage filter criteria for diverse protocols and allows users to configure customized filter criteria. For example, users can deny access to specific source or destination IP/MAC addresses.

The Moxa access control list configuration interface is easy-to-use. Users can quickly establish filtering rules, manage rule priorities, and view overall settings in the display page.

## The ACL Concept

### What is ACL?

Access control list is a basic traffic filter for ingress and egress packets. It can examine each Ethernet packet's information and take necessary action. Moxa Layer 3 switches provide complete filtering capability. Access list criteria could include the source or destination IP address of the packets, the source or destination MAC address of the packets, IP protocols, or other information. The ACL can check these criteria to decide whether to permit or deny access to a packet.

### Benefits of ACL

ACL has per interface, per packet direction, and per protocol filtering capability. These features can provide basic protection by filtering specific packets. The main benefits of ACL are as follows:

- **Manage authority of hosts:** ACL can restrict specific devices through MAC address filtering. The user can deny all packets or only permit packets that come from specific devices.
- **Subnet authority management:** Configure filtering rules for specific subnet IP addresses. ACL can restrict packets from or to specific subnets.
- **Network security:** The demand for networking security is growing. ACL can provide basic protection which works similarly to an Ethernet firewall device.
- **Control traffic flow by filtering specific protocols:** ACL can filter specific IP protocols such as TCP or UDP packets.

### How ACL works

ACL working structure is based on access lists. Each access list is a filter. When a packet enters into or exits from a switch, ACL will compare the packet to the rules in the access lists, starting from the first rule. If a packet is rejected or accepted by the first rule, the switch will drop or pass this packet directly without checking the rest of the lower-priority rules. In the other words, Access Control List has "Priority Index" as its attribute to define the priority in the web configuration console.

There are two types of settings for an ACL: the *list* settings, and the *rule* settings. In order to be created, an Access Control List needs the following list settings: Name, Priority Index, Filter Type, and Ports to Apply. Once created, each Access Control List has its own set of rule settings. Priority Index represents the priority of the names in the access list. Names at Priority Index 1 have first priority in packet filtering. The Priority Index is adjustable whenever users need to change the priority. In this function, there are two types of packet filtering available:

- IP based
- MAC Based

Filter type defines whether the access list will examine packets based on IP or MAC address. This type affects what detailed rules can be edited. Then, assign the ports you would like to apply the list to. You can also define Ingress and Egress per port.



After adding a new access control list, you can also create new rules for the access control list. Each ACL group accepts 10 rules. Rules can filter packets by source and destination IP/MAC address, IP protocol, TCP/UDP Port, Ethernet Type, and VLAN ID.

After all rules are set, ACL starts to filter the packets by the rule with the highest Priority Index (smaller number, higher priority). Once a rule denies or accepts its access, the packet will be dropped or passed.

## Access Control List Configuration and Setup

### Access Control List Settings

Creating an access control list starts at the Access Control List Setting page.

In this page, you can mainly configure two settings:

#### Add/Modify Access Control List

This function lets you **Add** a new access control list or **Modify** an existing access control list. The operation depends on the **Priority Index** you select. If the selected priority index is still empty, you can start by creating a new access control list. Parameters for editing are:

- Priority Index:** ACL checking sequence is based on this index. Smaller index numbers have higher priority for packet filtering. If a packet is filtered by an access list with higher priority, those access lists with lower priority will not be executed.  
 Note that Priority Index is not a one-to-one index for each list name. It changes when swapping the priority of different access control lists.  
 The maximum Priority Index number is 16.
- Name:** You can name the access control list in this field. This is the access list's unique name.
- Filter:** Select filtering by either IP or MAC address. Detailed settings can be configured in the **Access Control Rule Settings** page.
- Ingress Port Map/Egress Port Map:** You can choose which ports to apply the rules to. The Ingress and Egress condition uses **OR** logic. This means a packet only needs to match one ingress or egress port rule to be examined.

If a selected priority index is already in the access control list, then you can modify these parameters listed above. After configuration, click **Activate** to confirm the settings. Then you will see a new list appear in the **Access Control List** table.

## Adjust ACL Priority Index

**Access Control List**

Priority Index	Name	Filter
1	ProtectionSetting	IP base
2	VLANfilter	IP base
3	DeviceGroupA	MAC base
4	FilterIPA	IP base
5	DeviceGroupB	MAC base
6	PLCA	MAC base

Changing an established access control list's priority is easy. Moxa provides a simple interface to let you easily adjust priority. Follow the three steps below to adjust the priority:

- Step 1:** Select the list
- Step 2:** Click the **Up/Down** button to adjust the sequence. The Priority Index will change with the list's position.
- Step 3:** Click the **Activate** button to confirm the settings.



### NOTE

TN-4500A Series switch only supports Ingress Port Map, and the TN-5800A Series switch supports both Ingress and Egress Port Map.

## Access Control Rule Settings

You can edit an access control list's rules on this page. Each ACL can include up to 10 rules.

**Access Control Rule Setting**

**Access Control List**

Priority Index	Name	Filter
1	test	IP Base

Ingress Port Map				Egress Port Map			
1 <input checked="" type="checkbox"/>	2 <input type="checkbox"/>	3 <input type="checkbox"/>	4 <input type="checkbox"/>	1 <input type="checkbox"/>	2 <input checked="" type="checkbox"/>	3 <input type="checkbox"/>	4 <input type="checkbox"/>
5 <input type="checkbox"/>	6 <input type="checkbox"/>	7 <input type="checkbox"/>	8 <input type="checkbox"/>	5 <input type="checkbox"/>	6 <input type="checkbox"/>	7 <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	10 <input type="checkbox"/>	11 <input type="checkbox"/>	12 <input type="checkbox"/>	9 <input type="checkbox"/>	10 <input type="checkbox"/>	11 <input type="checkbox"/>	12 <input type="checkbox"/>
13 <input type="checkbox"/>	14 <input type="checkbox"/>	15 <input type="checkbox"/>	16 <input type="checkbox"/>	13 <input type="checkbox"/>	14 <input type="checkbox"/>	15 <input type="checkbox"/>	16 <input type="checkbox"/>
17 <input type="checkbox"/>	18 <input type="checkbox"/>	19 <input type="checkbox"/>	20 <input type="checkbox"/>	17 <input type="checkbox"/>	18 <input type="checkbox"/>	19 <input type="checkbox"/>	20 <input type="checkbox"/>

**Access Control Rule**

Index	Action	Source IP Address	Destination IP Address	IP Protocol	TCP/UDP source port	TCP/UDP destination port
1	Permit	0.0.0.0/0.0.0.0	0.0.0.0/0.0.0.0			

First, select the access control list you would like to edit based on the Priority Index. The Ingress/Egress Port map will display the port settings.



### NOTE

The port map here is also editable. Any change here will change the access control list settings.

Access control rule displays setting options based on the filtering type used:

## IP-Based

After configuring, click Add button to add the rule to the list. Then, click Activate to activate the settings.

**Access Control Rule**

Index	Action	Source IP Address	Destination IP Address	IP Protocol	TCP/UDP source port	TCP/UDP destination port
1	Permit	0.0.0.0/0.0.0.0	0.0.0.0/0.0.0.0			

Action:

Source IP Address:

Source IP Address Mask:

Destination IP Address:

Destination IP Address Mask:

IP Protocol:   (0x00 ~ 0xFF)

TCP/UDP Source Port:  (1~65535)

TCP/UDP Destination Port:  (1~65535)

- **Action:** Select the action if the rule criterion is met.
  - **Deny:** Drop packets when the ACL rule is met.
  - **Permit to Low Priority Queue:** Forward packets with low priority when the ACL rule is met.
  - **Permit to Normal Priority Queue:** Forward packets with normal priority when the ACL rule is met.
  - **Permit to Medium Priority Queue:** Forward packets with medium priority when the ACL rule is met.
  - **Permit to High Priority Queue:** Forward packets with high priority when the ACL rule is met.
- **Source IP Address/Source IP Address Mask:** Defines the IP address rule. By using the mask, you can assign specific subnet ranges to filter. It allows checking the source or destination of the packet. Choose **Any** if you do not need to use this criteria.
- **IP Protocol:** Select the type of protocols to be filtered. Moxa provides **ICMP, IGMP, IP over IP, TCP,** and **UDP** as options in this field.
- **TCP/UDP Source Port, TCP/UDP Destination Port:** If TCP or UDP are selected as the filtering protocol, these fields will allow you to enter port numbers for filtering.

Once ready, click the **Add** button to add the rule to the list. Then, click **Activate** to activate the settings.

## MAC-Based

**Access Control Rule**

Index	Action	Source MAC Address	Destination MAC Address	Ether Type	VLAN ID

Action:

Source MAC Address:   (XX:XX:XX:XX:XX:XX)

Source MAC Address Mask:  (XX:XX:XX:XX:XX:XX)

Destination MAC Address:   (XX:XX:XX:XX:XX:XX)

Destination MAC Address Mask:  (XX:XX:XX:XX:XX:XX)

Ether Type:   (0x0000 ~ 0xFFFF)

VLAN ID:  (1 ~ 4094)

- **Action:** Select the action if the rule criterion is met.
  - **Deny:** Drop packets when the ACL rule is met.

- **Permit to Low Priority Queue:** Forward packets with low priority when the ACL rule is met.
  - **Permit to Normal Priority Queue:** Forward packets with normal priority when the ACL rule is met.
  - **Permit to Medium Priority Queue:** Forward packets with medium priority when the ACL rule is met.
  - **Permit to High Priority Queue:** Forward packets with high priority when the ACL rule is met.
  - **Source MAC Address/Source MAC Address Mask:** Defines the MAC address rule. By using the mask, you can assign specific MAC address ranges to filter. It allows checking the source or destination of the packet. Choose **Any** if you do not need to use this criteria.
  - **Ethernet Type:** Select the type of Ethernet protocol to filter. Options here are **IPv4, ARP, RARP, IEEE802.1Q, IPv6, IEE802.3, PROFIENT,** and **LLDP**
  - **VLAN ID:** Enter a VLAN ID you would like to filter by.
- Once ready, click the **Add** button to add the rule to the list. Then, click **Activate** to activate the settings.

## Access Control Rule Show

The Access Control Rule Show page provides a complete view of all ACL settings. In this page, you can view the rules by **Ingress** port, **Egress** port, or **Priority Index**. Click the drop-down menu to select the Port or Priority Index, and all the rules will be displayed in the table.

### Access Control Rule Show

**Select Port**

Port	Direction
1 ▾	Ingress ▾

**Access Control List**

ACL ID	Name	Filter
1 ▾	test1	MAC Based

**Access Control Rule**

Index	Action	Source MAC Address	Destination MAC Address	Ether Type	Vlan Id
1	Deny	00:00:00:00:00:00/00:00:00:00:00:00	00:00:00:00:00:00/00:00:00:00:00:00		



## NOTE

For TN-5800A series, there are two limitations on ACL settings. Based on the ingress port type of ACL rules, there are two types for the limitation of numbers.

Ingress Port Map	Egress Port Map
1-1 <input type="checkbox"/> 1-2 <input type="checkbox"/> 1-3 <input type="checkbox"/> 1-4 <input type="checkbox"/>	1-1 <input type="checkbox"/> 1-2 <input type="checkbox"/> 1-3 <input type="checkbox"/> 1-4 <input type="checkbox"/>
3-1 <input type="checkbox"/> 3-2 <input type="checkbox"/> 3-3 <input type="checkbox"/> 3-4 <input type="checkbox"/>	3-1 <input type="checkbox"/> 3-2 <input type="checkbox"/> 3-3 <input type="checkbox"/> 3-4 <input type="checkbox"/>
4-1 <input type="checkbox"/> 4-2 <input type="checkbox"/> 4-3 <input type="checkbox"/> 4-4 <input type="checkbox"/>	4-1 <input type="checkbox"/> 4-2 <input type="checkbox"/> 4-3 <input type="checkbox"/> 4-4 <input type="checkbox"/>
5-1 <input type="checkbox"/> 5-2 <input type="checkbox"/> 5-3 <input type="checkbox"/> 5-4 <input type="checkbox"/>	5-1 <input type="checkbox"/> 5-2 <input type="checkbox"/> 5-3 <input type="checkbox"/> 5-4 <input type="checkbox"/>
6-1 <input type="checkbox"/> 6-2 <input type="checkbox"/> 6-3 <input type="checkbox"/> 6-4 <input type="checkbox"/>	6-1 <input type="checkbox"/> 6-2 <input type="checkbox"/> 6-3 <input type="checkbox"/> 6-4 <input type="checkbox"/>

### Limitation Type 1:

When rules contain Ingress Fast Ethernet (FE) ports, the **Number should NOT be greater than 160**.

### Limitation Type 2:

When rules contain Ingress Gigabit Ethernet (GE) ports or no Ingress ports, the **Number should NOT be greater than 40**.

Example 1 for Limitation 1

Rule A contains 3 ingress FE ports and 4 egress FE ports, and it results in the number of  $3 \times 4 = 12$ .

Rule B contains 5 ingress FE ports and 6 egress GE ports, and it results in the number of  $5 \times 6 = 30$ .

Rule C contains 7 ingress FE ports and no egress port, and it results in the number of 7.

Make sure the amount of those numbers "12+30+7" is not greater than 160.

### Example 2 for Limitation 2

Rule D contains 1 ingress GE port and 2 egress FE ports, and it results in the number of  $1 \times 2 = 2$ .  
 Rule E contains 3 ingress GE ports and 4 egress GE ports, and it results in the number of  $3 \times 4 = 12$ .  
 Rule F contains 5 ingress GE ports and no egress ports, and it results in the number of 5.  
 Rule G contains no ingress ports and 6 FE egress ports, and it results in the number of 6.  
 Rule H contains no ingress ports and 7 GE egress ports, and it results in the number of 7.  
 Make sure the amount of those numbers "2+12+5+6+7" is not greater than 40.

**Example 3 for Limitation 1 and 2**

Rule Z contains 3 ingress FE ports, 2 ingress GE ports, and 5 egress GE ports.  
 It results in the number of  $3 \times 5 = 15$  in Limitation 1, and  $2 \times 5 = 10$  in Limitation 2.  
 Make sure the amount in limitation 1, "15", is not greater than 160.  
 Make sure the amount in limitation 2, "10", is not greater than 40.

## Using Event Log

**Event Log Table**

Page 67/67

Index	Bootup	Date	Time	System Startup Time	Event
991	419	--	--	0d0h42m37s	Port 1-2 link off
992	420	--	--	0d0h0m1s	Cold start
993	420	--	--	0d0h0m3s	Port 3-8 link on
994	420	--	--	0d0h1m14s	192.168.127.1 admin Auth. ok
995	420	--	--	0d0h1m54s	Port 3-8 link off
996	421	--	--	0d0h0m1s	Cold start
997	421	--	--	0d0h0m4s	Port 1-2 link on
998	421	--	--	0d0h0m12s	192.168.127.1 admin Auth. ok
999	421	--	--	0d0h53m26s	Configuration change activated
1000	421	--	--	0d0h53m33s	192.168.127.1 admin Auth. ok

Clear

The Event Log Table displays the following information:

<b>Bootup</b>	This field shows how many times the Moxa switch has been rebooted or cold started.
<b>Date</b>	The date is updated based on how the current date is set in the Basic Setting page.
<b>Time</b>	The time is updated based on how the current time is set in the Basic Setting page.
<b>System Startup Time</b>	The system startup time related to this event.
<b>Events</b>	Events that have occurred.



### NOTE

The following events will be recorded into the Moxa switch's Event Log Table:

- Cold start
- Warm start
- Configuration change activated
- Power 1/2 transition (Off ( On), Power 1/2 transition (On ( Off))
- Authentication fail
- Topology changed
- Master setting is mismatched
- Port traffic overload
- dot1x Auth Fail

- Port link off/on
-

# Using Syslog

The Syslog function provides the event logs for the syslog server. The function supports 3 configurable syslog servers and syslog server UDP port numbers. When an event occurs, the event will be sent as a syslog UDP packet to the specified syslog servers.

## Syslog Server 1/2/3

Setting	Description	Factory Default
IP Address	Enter the IP address of Syslog server 1/2/3, used by your network.	None
Port Destination (1 to 65535)	Enter the UDP port of Syslog server 1/2/3.	514



## NOTE


The following events will be recorded into the Moxa switch's Event Log table, and will then be sent to the specified Syslog Server:

- Cold start
- Warm start
- Configuration change activated
- Power 1/2 transition (Off (On), Power 1/2 transition (On (Off))
- Authentication fail
- Topology changed
- Master setting is mismatched
- Port traffic overload
- dot1x Auth Fail
- Port link off/on


# Using HTTPS/SSL

To secure your HTTP access, the Moxa switch supports HTTPS/SSL to encrypt all HTTP traffic. Perform the following steps to access the Moxa switch's web browser interface via HTTPS/SSL.

1. Open Internet Explorer and type **https://{Moxa switch's IP address}** in the address field. Press Enter to establish the connection.

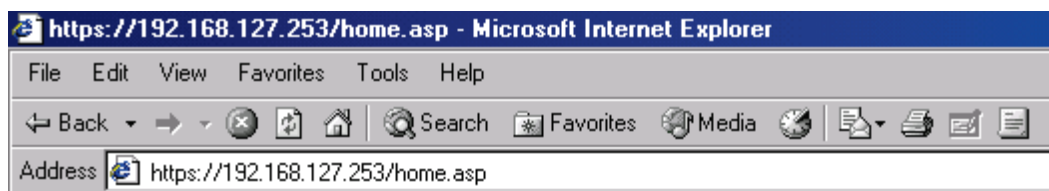

2. Warning messages will pop up to warn the user that the security certificate was issued by a company they have not chosen to trust.

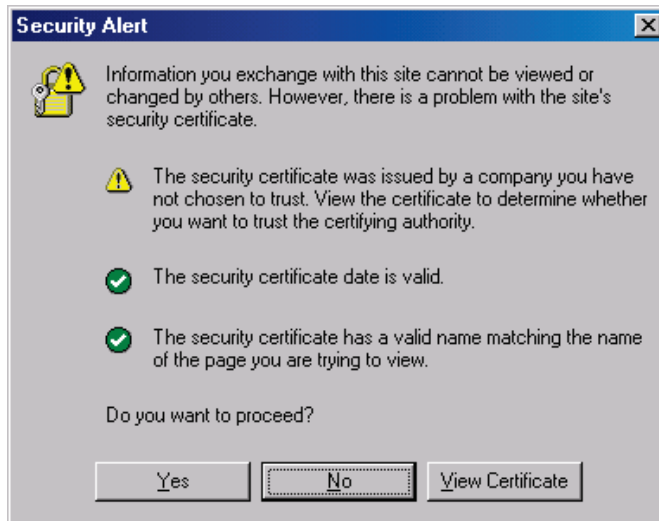

3. Select **Yes** to enter the Moxa switch's web browser interface and access the web browser interface secured via HTTPS/SSL.



## NOTE

Moxa provides a Root CA certificate. After installing this certificate on your PC or notebook, you can access the web browser interface directly and you will no longer see any warning messages. You may download the certificate from the Moxa switch's CD-ROM.



# A. MIB Groups

---

The Moxa switch comes with built-in SNMP (Simple Network Management Protocol) agent software that supports cold/warm start trap, line up/down trap, and RFC 1213 MIB-II.

The standard MIB groups that the Moxa switch supports are as follows:

## **MIB II.1—System Group**

sysORTable

## **MIB II.2—Interfaces Group**

ifTable

## **MIB II.4 – IP Group**

ipAddrTable

ipNetToMediaTable

IpGroup

IpBasicStatsGroup

IpStatsGroup

## **MIB II.5—ICMP Group**

IcmpGroup

IcmpInputStatus

IcmpOutputStats

## **MIB II.6—TCP Group**

tcpConnTable

TcpGroup

TcpStats

## **MIB II.7—UDP Group**

udpTable

UdpStats

## **MIB II.10—Transmission Group**

dot3

dot3StatsTable

## **MIB II.11—SNMP Group**

SnmpBasicGroup

SnmpInputStats

SnmpOutputStats

## MIB II.17—dot1dBridge Group

```
dot1dBase
    dot1dBasePortTable
dot1dStp
    dot1dStpPortTable
dot1dTp
    dot1dTpFdbTable
    dot1dTpPortTable
    dot1dTpHCPortTable
    dot1dTpPortOverflowTable
pBridgeMIB
    dot1dExtBase
    dot1dPriority
    dot1dGarp
qBridgeMIB
    dot1qBase
    dot1qTp
        dot1qFdbTable
        dot1qTpPortTable
        dot1qTpGroupTable
        dot1qForwardUnregisteredTable
    dot1qStatic
        dot1qStaticUnicastTable
        dot1qStaticMulticastTable
    dot1qVlan
        dot1qVlanCurrentTable
        dot1qVlanStaticTable
        dot1qPortVlanTable
```

The Moxa switch also provides a private MIB file, located in the file **Moxa-[switch's model name]-MIB.my** on the Moxa switch utility CD-ROM.

### Public Traps

- Cold Start
- Link Up
- Link Down
- Authentication Failure
- dot1dBridge New Root
- dot1dBridge Topology Changed

## **Private Traps**

- Configuration Changed
- Power On
- Power Off
- Traffic Overloaded
- Turbo Ring Topology Changed
- Turbo Ring Coupling Port Changed
- Turbo Ring Master Mismatch