

ioPAC 6500シリーズ（65M） 拡張モジュール

モジュール型プログラマブルIINコントローラ向けの拡張モジュール



機能とメリット

- 制御ユニット1台と最大4台の拡張ユニットをサポートし、I/Oポイントの追加が可能
- 工具不要のハードウェア取り付けとホットスワップ設計により、運用効率を最大化
- 完全モジュラー設計により、導入の柔軟性を最大化
- SFPポートを優先する、2つのSFPと2つのRJ45のコンボポート設計

認証




製品紹介

ioPAC 6500シリーズ（Intelligent Integrated NodeまたはIINとも呼ばれる）は、レイヤ2マネージドスイッチを内蔵した新世代のLinuxベースRTUです。Arm Cortex-A53クアッドコアCPUを搭載し、高いパフォーマンスを発揮します。


内蔵拡張性

ioPAC 6500シリーズは最大4台の拡張ユニットをサポートし、I/Oポイントの追加を可能にします。

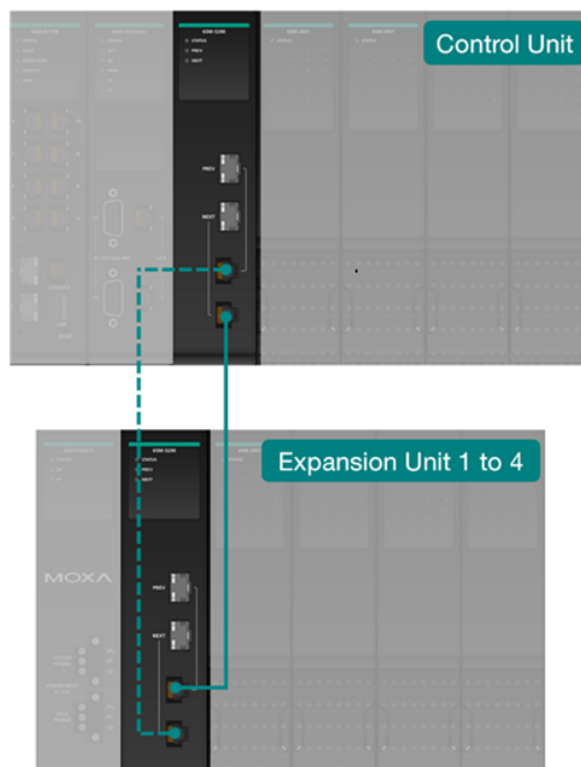

完全モジュール設計

ioPAC 6500シリーズは、レゴのようなユニークな機械設計を特徴としており、設置工数を最小限に抑えながら柔軟な導入を可能にします。このシリーズは、以下のコンポーネントに分けられます。バックプレーンモジュール、電源モジュール、通信モジュール、拡張モジュール、CPUモジュール、I/OおよびTBモジュール、およびターミナルブロックモジュール。

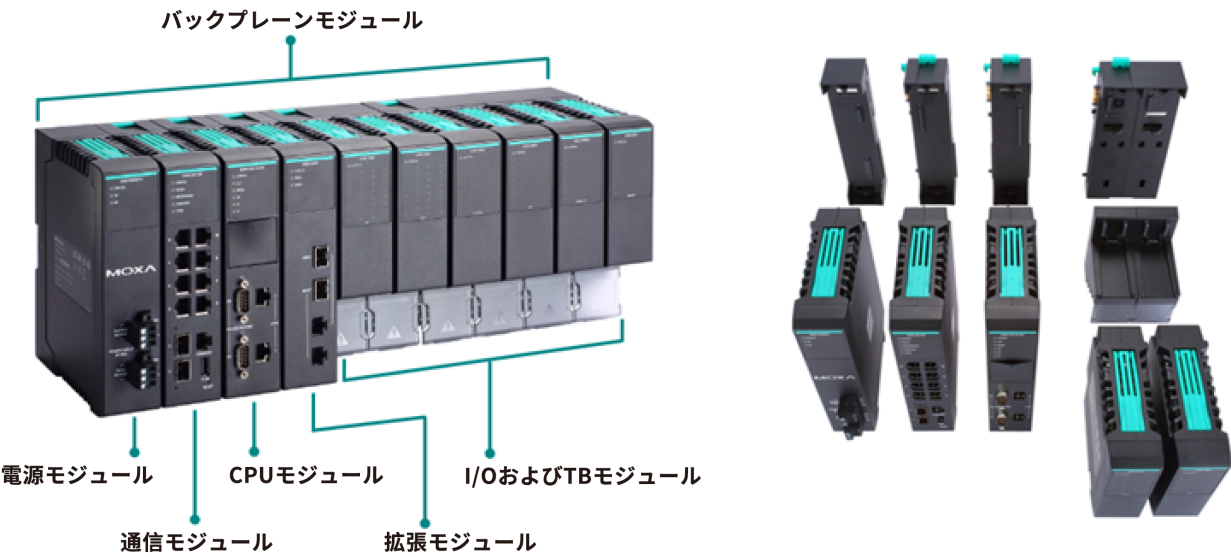

仕様

Expansion Interface	
Ports	Combo Port RJ45 x 2 and SFP x 2
Protocols	Proprietary
Isolation	1500 VDC/min Between external connection port and system
Power Consumption	
System Power	0.38 A @ 12 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 131.5 mm (1.65 x 6.97 x 5.18 in)
Weight	501 g (1.1 lb)
Installation	DIN-rail mounting Rack mounting (with optional kit)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) (with SFP module installed) Note: Proper airflow is required in an environment with temperature > 65°C
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m ¹

1. Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: (DC) 10 V; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Safety	UL 61010-2-201 UL 61010-1
Shock	IEC 60068-2-27 Half sine wave; acceleration: 15 g; time: 11 ms
Vibration	IEC 60068-2-6 DIN-rail mounted: 7 mm peak-peak (p-p) (2 to 8.42 Hz), 1 g (8.42 to 150 Hz) Rack mounted (with optional kit): 7 mm peak-peak (p-p) (2 to 8.42 Hz), 0.5 g (8.42 to 150 Hz)
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

MTBF

Time	2,800,019 hrs
Standards	Telcordia Standard SR-332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x ioPAC 6500 Series (65M) Expansion Module
Documentation	1 x quick installation guide 1 x warranty card

寸法

単位: mm (インチ)

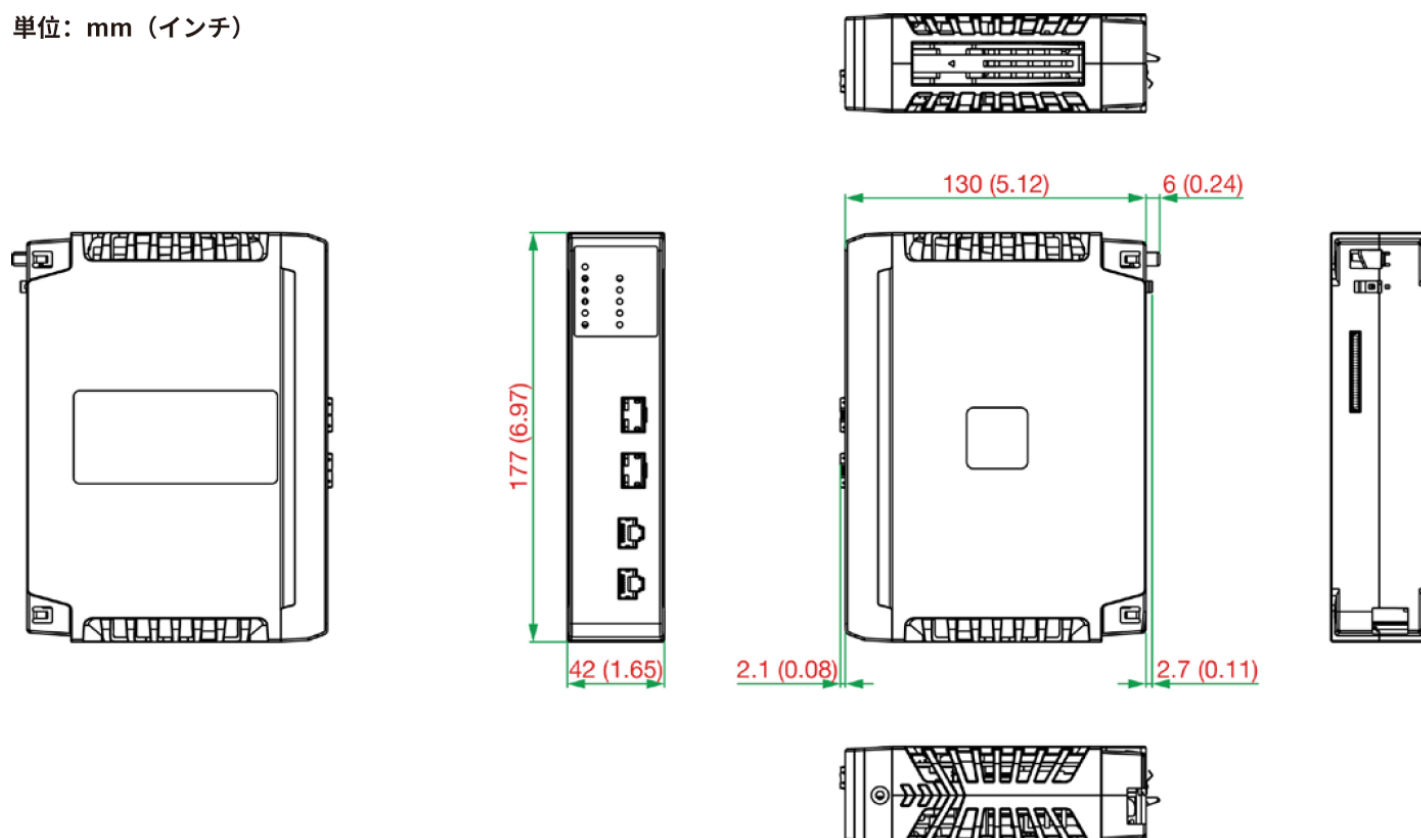

注文情報

Model Name	RJ45 Ports	SFP Ports	Conformal Coating	Operating Temperature
65M-5290-CT-T	2	2	Yes	-40 to 75°C (with SFP module installed)

アクセサリー (別売)

SFP Modules

SFP-1GEZXLC	SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLSXLC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature

SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-2.5GLSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature
SFP-2.5GSLHLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature
SFP-2.5GMLC-T	SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature
SFP-2.5GSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature

© Moxa Inc. All rights reserved. 2025年11月4日更新。

Moxa Inc.の明白な許可を面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。