

OnCell G4308-LTE4 Series

8-port industrial LTE Cat. 4 secure cellular routers



Features and Benefits

- 8-port high-density design for future expansion flexibility
- Cellular router/switch/firewall all-in-one solution
- Dual SIM failover and auto connection recovery for reliable cellular connectivity
- Industrial network protection with firewall and Deep Packet Inspection (DPI)
- Supports Secure Boot for checking system integrity
- Centralized monitoring and remote access with Moxa Remote Connect (MRC)

Certifications



Introduction

The OnCell G4308-LTE4 Series is a range of all-in-one industrial cellular routers that integrate an 8-port high-performance switch, firewall, and LTE Cat.4 connectivity, making them ideal for connecting multiple devices at remote sites. By avoiding the need for multiple standalone devices, these cellular routers save cabinet space, reduce wiring and configuration complexity, and lower maintenance costs to simplify deployment and maintenance efforts. Designed to act as a wireless backbone for critical industrial applications, they deliver stable Serial/Ethernet-to-cellular connections and ensure optimal reliability with dual SIM failover and GuaranLink cellular auto-recovery.

The OnCell G4308-LTE4 Series protects organizations against threats on multiple fronts. Built from the ground up with security in mind, Secure Boot ensures firmware integrity while the advanced firewall with OT protocol awareness safeguards the network from internal and external threats. Meanwhile, Deep Packet Inspection (DPI) detects and blocks forged or malicious packets. Combined, these features deliver comprehensive, multi-level security for critical operations.

With MRC Quick Link Ultra, operators gain complete visibility and secure remote control over both the OnCell router and its connected end devices, allowing for faster troubleshooting, minimal downtime, and more reliable industrial operations.

Specifications

Cellular Interface

Cellular Standards	LTE CAT 4, HSPA, UMTS
Data Rate	20 MHz bandwidth: 150 Mbps DL, 50 Mbps UL
Frequency Bands Supported	LTE B1 (2100 MHz) / B2 (1900 MHz) / B3 (1800 MHz) / B4 (1700/2100 MHz (AWS)) / B5 (850 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B12 (700 MHz) / B13 (700 MHz) / B14 (700 MHz) / B20 (800 MHz) / B25 (1900 MHz) / B26 (850 MHz) / B28 (700 MHz) UMTS/HSPA B1 (2100 MHz) / B2 (1900 MHz) / B4 (1700 MHz(AWS)) / B5 (850 MHz) / B6 (800MHz) / B8 (900 MHz) / B19 (800 MHz)
No. of SIMs	2 Push-eject tray type
SIM Format	Nano SIM
Cellular Antenna Connectors	2 x SMA female

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	8
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X)

GNSS Interface

GNSS Bands	GPS (1575.42 MHz) GLONASS (1597.52 MHz) Galileo (1575.42 MHz) BeiDou (1561.098 MHz)
GNSS Antenna Connectors	1 x SMA female

Input/Output Interface

Digital Output Channels	1 Relay output with current carrying capacity of 1 A @ 24 VDC
Digital Input Channels	1
Digital Inputs	0 to +3 V for state 0 +9 to +36 V for state 1
Buttons	Reset button

USB Interface

No. of USB Ports	1
USB Connector	USB Type A
USB Standards	USB 2.0 ¹

Serial Interface

No. of Ports	1
Connector	DB9 male
Serial Standards	RS-232/422/485
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None Even Odd
Baudrate	300 bps to 921.6 kbps
Console Port	RS-232 (TxD, RxD, GND), USB type-C (115200, n, 8, 1) ²

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

Operation Modes

Standards	Real COM mode RFC2217 mode TCP Client mode TCP Server mode UDP mode SCATS
-----------	--

1. For use with the ABC-02 Series configuration backup and restoration tool.
2. We recommend using the Moxa CBL-USBCF9-GY-150 console cable, which can be purchased separately.

LED Interface

LED Indicators

PWR1, PWR2, STATE, USB, SIM1, SIM2, CELL, LTE, GNSS, SERIAL, VPN

Wireless Software Features

Management

GuaranLink
Send SMS
SMS Remote Control
Moxa Remote Connect (MRC)

Ethernet Software Features

Management

DHCP Server/Client
DNS
Syslog
MXview One
MXconfig
MXsecurity
Power Management

Broadcast Forwarding

IP directed broadcast, broadcast forwarding

Configuration Options

Serial Console³
Web Console (HTTP/HTTPS)
Command Line Interface (CLI) through Serial/Telnet/SSH

Network Protocols

LLDP
SMTP
SNMPv1/v2c/v3
TFTP
TCP/IP
UDP
IPv4
ARP
HTTP/HTTPS
Telnet
SSH

Filter

802.1Q VLAN
Port-based VLAN

Unicast Routing

OSPF
RIPV1/V2
Static Route

Multicast Routing

Static Route

Routing Redundancy

VRRP

Time Management

NTP Server/Client
SNTP

Tunneling

GRE

VPN

IPsec
OpenVPN

Security Functions

Hardware-based Security

Secure Boot

Password

User-level password protection

Authentication

Local database
RADIUS
Access Control List

3. We recommend using the Moxa CBL-USBCF9-GY-150 console cable, which can be purchased separately.

DoS and DDoS Protection

Technology	ARP-Flood FIN Scan ICMP Flood TCP Sessions Without SYN NMAP-ID Scan NMAP-Xmas Scan Null Scan SYN/FIN Scan SYN/RST Scan SYN-Flood Xmas Scan
------------	--

Firewall

Filter	DDoS Ethernet protocols ICMP IP address MAC address Ports
Deep Packet Inspection	Modbus TCP Modbus UDP DNP3 IEC 60870-5-104 IEC 61850 MMS EtherNet/IP MELSEC Omron FINS OPC UA Siemens S7 Comm. Siemens S7 Comm. Plus Additional protocols will be supported through future firmware updates.

NAT

Features	1-to-1 N-to-1 PAT NAT loopback Double NAT
----------	---

IPsec VPN

Authentication	MD5 and SHA (SHA-256) RSA (key size: 1024-bit, 2048-bit) Pre-shared Key or X.509 v3 certificate
Encryption	DES 3DES AES-128 AES-192 AES-256 AES-256 GCM
Concurrent VPN Tunnels	Max. 15 IPsec VPN tunnels

OpenVPN

OpenVPN	OpenVPN (client)
Encryption	AES-128/192/256 CBC AES-128/192/256 GCM CHACHA20-POLY1305

Power Parameters

Input Current	1.16 A (max.)
Input Voltage	12 to 48 VDC Redundant dual inputs


Power Consumption	47 mW at 12 V (idle) 11.05 W at 12 V (typ.) 14.28 W at 48 V (max.)
Power Connector	Screw-locked terminal block
Reverse Polarity Protection	Supported
Physical Characteristics	
Housing	Metal
Dimensions	125 x 58.2 x 100 mm (4.92 x 2.29 x 3.94 in)
Weight	707 g (1.56 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)
IP Rating	IP40 ⁴
Environmental Limits	
Operating Temperature	Standard models: -10 to 55°C (14 to 131°F) Wide temp. models: -30 to 70°C (-22 to 158°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 55032/35 EN 61000-6-2/-6-4 CISPR 32/35
EMI	ICES-003, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV (level 4) ⁵ IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m (level 3); 1.8, 2.6, 3.5, 5GHz: 3V/m (level 2) IEC 61000-4-4 EFT: Power: 2 kV; IO: 1 kV (level 3) ⁵ IEC 61000-4-5 Surge: Power: 2 kV, Signal: 2 kV (level 3) ⁵ IEC 61000-4-6 CS: 0.15 MHz to 80 MHz; Signal: 10 V (level 3) IEC 61000-4-8: 30 A/m (level 4)
Freefall	IEC 60068-2-32
Radio Frequency	FCC ID RI7LE910CXWWX PTCRB EN 303 413
Radio	RCM UKCA IC: 5131A-LE910CXWWX NCC: CCAK264G0020T7 TELEC: R 003-240163/T D240129003
Cellular Standards	EN 301 489-1/-19 (GPS) EN 301 489-1/-52 (WCDMA/LTE) EN 301 511 EN 301908-1/-2/-13
Cybersecurity	EN 18031-1
Safety	UL 62368-1 EN 62368-1

4. With the rubber SIM slot cover closed.
 5. This device demonstrates a capacity that exceeds the requirements set by certification standards.

Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
MTBF	
Time	1,533,742 hrs
Standards	Telcordia Standard SR-332
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/warranty
Package Contents	
Device	1 x OnCell G4308-LTE4 Series secure cellular router
Documentation	1 x quick installation guide 1 x warranty card
Installation Kit	1 x DIN-rail kit

Dimensions

Unit: mm (inch)

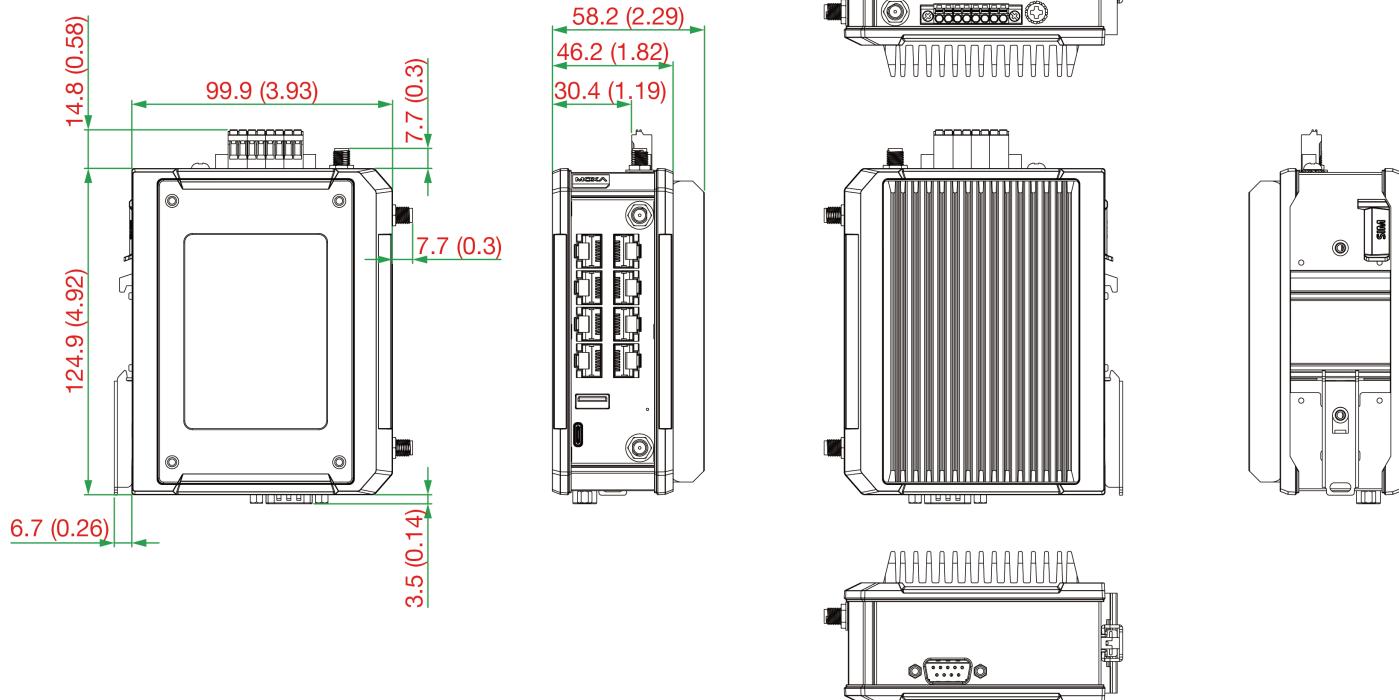

Ordering Information

Model Name	LTE Band	Operating Temp.
OnCell G4308-LTE4-GL	B1 (2100 MHz) / B2 (1900 MHz) / B3 (1800 MHz) / B4 (1700/2100 MHz (AWS)) / B5 (850 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B12 (700 MHz) / B13 (700 MHz) / B14 (700 MHz) / B20 (800 MHz) / B25 (1900 MHz) / B26 (850 MHz) / B28 (700 MHz)	-10 to 55°C
OnCell G4308-LTE4-GL-T	B1 (2100 MHz) / B2 (1900 MHz) / B3 (1800 MHz) / B4 (1700/2100 MHz (AWS)) / B5 (850 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B12 (700 MHz) / B13 (700 MHz) / B14 (700 MHz) / B20 (800 MHz) / B25 (1900 MHz) / B26 (850 MHz) / B28 (700 MHz)	-30 to 70°C

Accessories (sold separately)

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

Antennas

ANT-5G-OSM-04	4 dBi LTE/5G NR dipole antenna with SMA (male) connector
MAT-5G-PA-SM-2-06-3m	6 dBi MIMO panel antenna with 2 SMA (male) connectors for cellular applications, 3 m cable
ANT-GPS-CSM-04-3m	20 dBi at 1575 to 1605 MHz, right-hand circular polarization (RHCP), active GPS antenna with SMA (male) connector, 3 m cable

Wireless Antenna Cables

A-CRF-SMSF-R3-100	Wireless antenna cable with SMA (male) to SMA (female) connectors, magnetic base, RG-174 type, 1 m
A-CRF-SMSF-L1-300	Wireless antenna cable with SMA (male) to SMA (female) connectors, magnetic base, LMR195 type, 3 m
A-CRF-SMSF-C2-300	Wireless antenna cable with SMA (male) to SMA (female) connectors, CFD-200 type, 3 m
A-CRF-SMSF-C2-500	Wireless antenna cable with SMA (male) to SMA (female) connectors, CFD-200 type, 5 m

Mounting Kits

WK-41-01	Wall-mounting kit with 1 plate (41 x 144 x 7.5 mm)
WK-160-01	Wall-mounting kit with 1 plate (160 x 89 x 2.0 mm), 4 screws, black

Software

LIC-MXviewOne-NEW-XN-SR	MXview One node license with customizable node quantity (minimum 1 node)
LIC-MRCQL-ADD-1Y-XN-SR	1-year MRC Quick Link add-on license with customizable node quantity (minimum 1 node)
LIC-MXsecurity-NEW-XN-SR	MXsecurity perpetual node license with customizable node quantity (minimum 1 node)

© Moxa Inc. All rights reserved. Updated Jan 22, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.