

Moxa CLI Configuration Tool User Manual

Version 2.5, February 2026

www.moxa.com/products

MOXA[®]

© 2026 Moxa Inc. All rights reserved.

Moxa CLI Configuration Tool User Manual

The software described in this manual is furnished under a license agreement and may be used only in accordance with the terms of that agreement.

Copyright Notice

© 2026 Moxa Inc. All rights reserved.

Trademarks

The MOXA logo is a registered trademark of Moxa Inc.
All other trademarks or registered marks in this manual belong to their respective manufacturers.

Disclaimer

- Information in this document is subject to change without notice and does not represent a commitment on the part of Moxa.
- Moxa provides this document as is, without warranty of any kind, either expressed or implied, including, but not limited to, its particular purpose. Moxa reserves the right to make improvements and/or changes to this manual, or to the products and/or the programs described in this manual, at any time.
- Information provided in this manual is intended to be accurate and reliable. However, Moxa assumes no responsibility for its use, or for any infringements on the rights of third parties that may result from its use.
- This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

Technical Support Contact Information

www.moxa.com/support

Table of Contents

1. Introduction	4
System Requirements	4
Supported Platforms	4
Supported Models.....	4
Installing MCC_Tool on Windows	5
Installing MCC_Tool on Linux	8
2. Getting Started	10
Overview	10
Supported Functions and Command Structure	10
Device List	11
Support Product Series	11
Function Support Table	12
Usage Examples of Supported Functions.....	12
Report Firmware Versions.....	12
Upgrade Firmware and Restart the Device	13
Export/Import Device's Configuration	14
Restart Specific Serial Ports or the Whole Devices	16
Change User's Password on the Device	17
Show Support Model List	17
Update Plugin	17
Error Code Explanation	18

1. Introduction

Moxa CLI Configuration Tool (MCC_Tool) is a command-line tool that provides the following functions to manage field devices.

- Report firmware versions
- Upgrade firmware
- Import/export configuration files
- Password changes

Management tasks can be performed according to a desired scale (1 for a single device or 1 for multiple devices) and across different subnet networks.

System Requirements

Supported Platforms

- Windows 7 and later versions.
- Linux kernel 2.6 and later versions.

Supported Models

Product Series / Model	Supporting Firmware
NPort 5100A Series	Firmware v1.4 and later versions
NPort 5110	Firmware v2.0.62 and later versions
NPort 5130	Firmware v3.9 and later versions
NPort 5150	Firmware v3.9 and later versions
NPort P5150A Series	Firmware v1.4 and later versions
NPort 5200A Series	Firmware v1.4 and later versions
NPort 5200 Series	Firmware v2.12 and later versions
NPort 5400 Series	Firmware v3.13 and later versions
NPort 5600 Series	Firmware v3.9 and later versions
NPort 5600-DT Series	Firmware v2.6 and later versions
NPort 5600-DTL Series (EOL)	Firmware v1.5 and later versions
NPort S9450I Series	Firmware v1.1 and later versions
NPort S9650I Series	Firmware v1.1 and later versions
NPort IA5100A Models	Firmware v1.3 and later versions
NPort IA5200A Models	Firmware v1.3 and later versions
NPort IA5400A Models	Firmware v1.4 and later versions
NPort IA5000 Series	Firmware v1.7 and later versions
NPort IA5000-G2 Series	All versions
NPort 5000AI-M12 Series	Firmware v1.3 and later versions
NPort 6100/6200 Series	Firmware v1.13 and later versions
NPort 6100-G2/6200-G2 Series	All versions
NPort 6400/6600 Series	Firmware v1.13 and later versions
NPort 6400-G2 Series	All versions
NPort 6600-G2 Series	All versions


Product Series / Model	Supporting Firmware
MGate 5121 Series	All versions
MGate 5122 Series	All versions
MGate 5123 Series	All versions
MGate 5134 Series	All versions
MGate 5135/5435 Series	All versions
MGate 5192 Series	All versions
MGate 5216 Series	All versions
MGate 5217 Series	All versions
MGate MB3180/MB3280/MB3480 Series	Firmware v2.0 and later versions
MGate MB3170/MB3270 Series	Firmware v3.0 and later versions
MGate MB3170-G2/MB3270-G2/MB3470-G2 Series	All versions
MGate MB3660 Series	Firmware v2.0 and later versions
MGate 5101-PBM-MN Series	Firmware v2.1 and later versions
MGate 5102-PBM-PN Series	Firmware v2.2 and later versions
MGate 5103 Series	Firmware v2.1 and later versions
MGate 5105-MB-EIP Series	Firmware v4.2 and later versions
MGate 5109 Series	Firmware v2.2 and later versions
MGate 5111 Series	Firmware v1.2 and later versions
MGate 5114 Series	Firmware v1.2 and later versions
MGate 5118 Series	Firmware v2.1 and later versions
MGate W5108/W5208 Series (EOL)	Firmware v2.3 and later versions
ioLogik E1200 Series	Firmware v2.4 and later versions
ioThinX 4500 Series	All versions

Installing MCC_Tool on Windows


Step 1: Download MCC_Tool for Windows:

Look for Moxa CLI Configuration Tool (Windows) on your Moxa product page, under the Resource tab. Unzip and execute the .exe file. The setup wizard will pop up to direct you to the next steps.


Step 2: Select the destination location where the MCC_Tool should be installed.

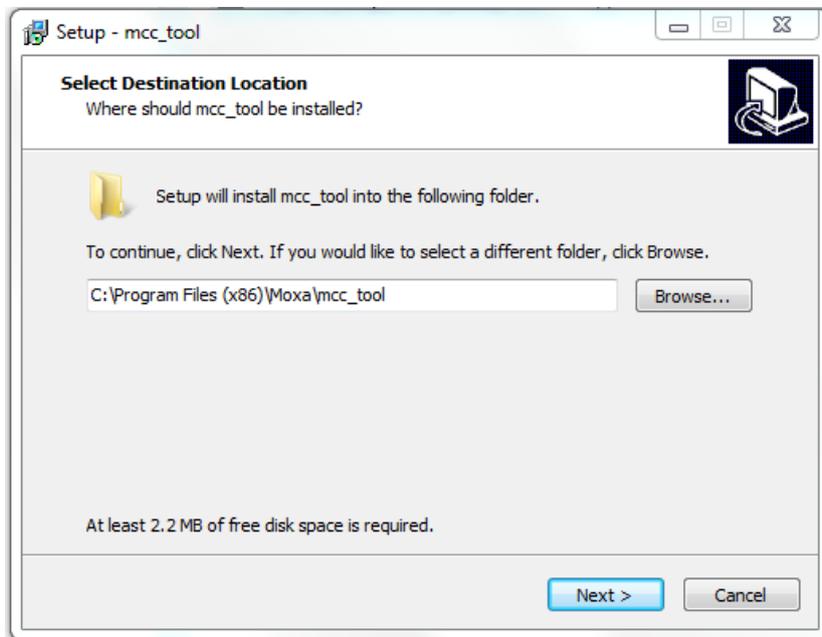


Step 3: Select **Start Menu Folder** to create the program's shortcuts.

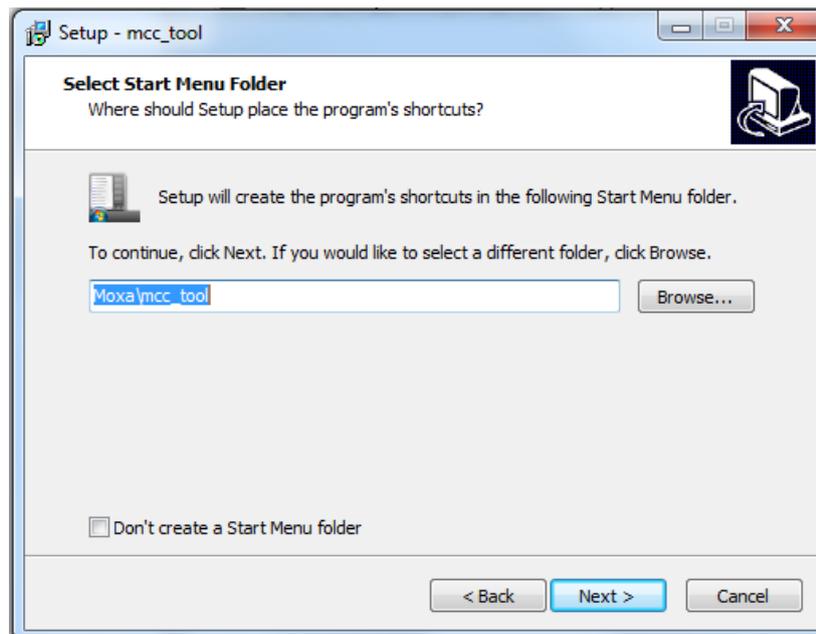


Step 4: Select Additional Tasks if any, and select **Next**.

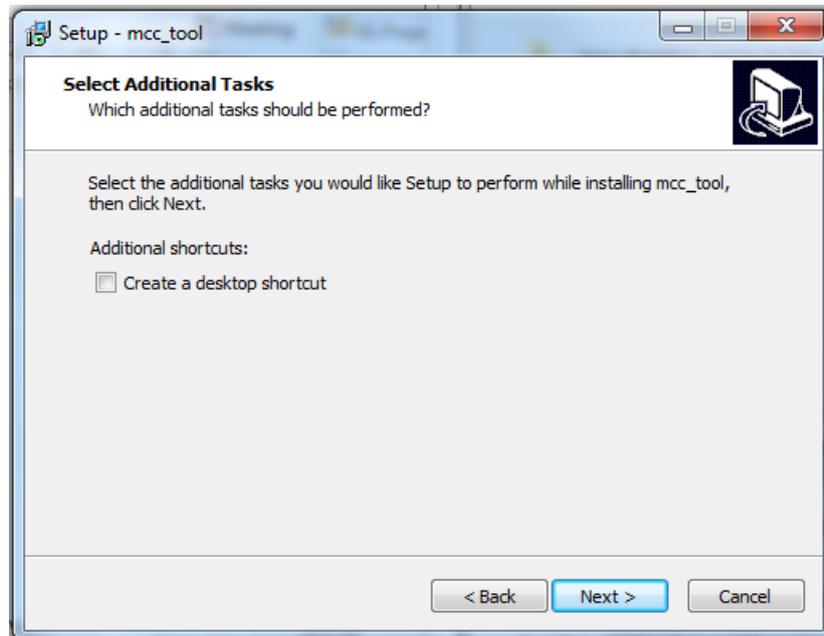

Step 5: Confirm previous selection and prepare to install.

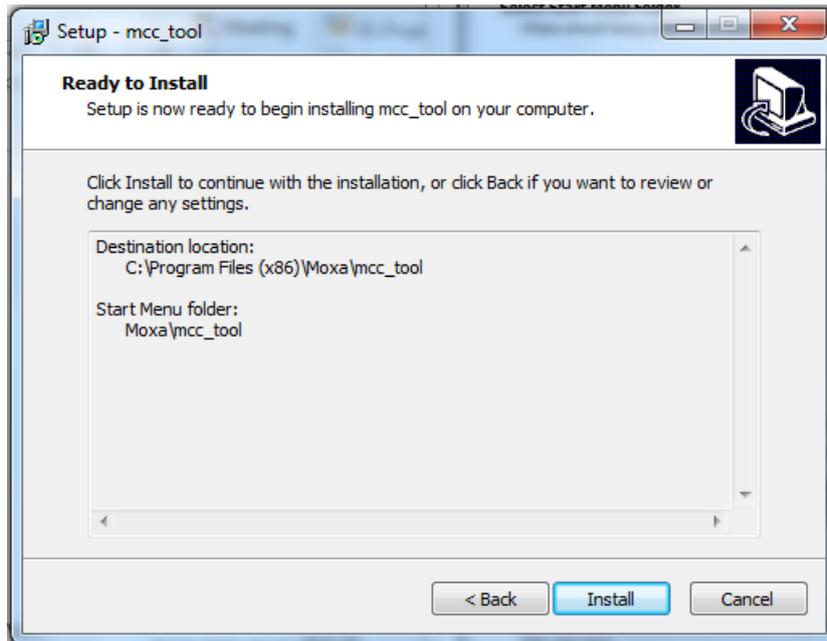

Step 6: Complete setup and check **Launch mcc_tool** if you want to use MCC_Tool after exiting the setup wizard.

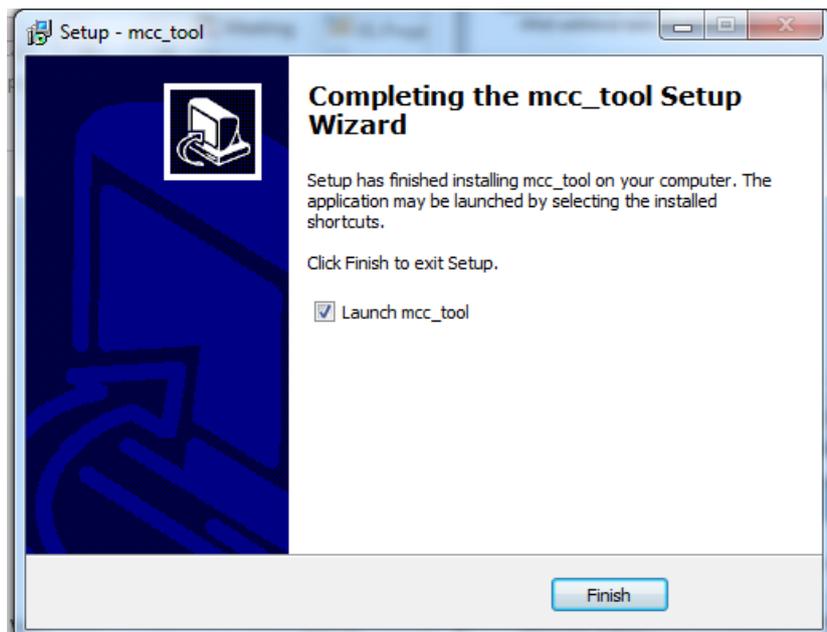

Step 7: Use `-h` command to prompt help information.

```
Administrator: C:\windows\system32\cmd.exe
MCC_Tool 1.1 Copyright: Moxa Inc.

Usage: ./mcc_tool [function] [options]
Function:
  -fw: Execute "Firmware related" action.
  -cfg: Execute "Configuration related" action.
  -pw: Execute "Password related" action.
  -re: Execute "Restart related" action.
  -ver: Show mcc library and model list version.
  -ml: Show supported models.
  -install: Install plugin.
  -help: Display version of MCC_Tool and help information.
Options:
  -r: Report firmware version.
  -up: Upgrade firmware.
  -ex: Export the configuration file.
  -im: Import the configuration file.
  -ch: Change password.
  -de: Restart device.
  -sp: Restart port.
  -i: Device IP address.
  -il: IP address list containing 1 IP address per line.
  -d: Device list.
  -f: File to be imported or upgraded.
  -nd: The Device list with new password settings.
  -u: Device's user account for login.
  -p: Device's password for login.
  -npw: The new password for the specific user.
  -dk: Secret key for import/export configuration.
  -ps: Specific serial ports to be restarted.
  -o: Output file name.
  -l: Export result log file.
  -n: Keep network settings for configuration import.
  -nr: Don't reboot device after finishing executing command.
  -print: Print process message for upgrade firmware command.
  -t: Timeout(sec).
```

Installing MCC_Tool on Linux

Step 1: Download MCC_Tool for Linux:

Look for Moxa CLI Configuration Tool (Linux) on the Moxa product page, under the Resource tab.

Step 2: After downloading the file and unzip it. For example:

```
moxa@moxa-virtual-machine:~$ cd Desktop/

moxa@moxa-virtual-machine:~/Desktop$ tar -xvzf
mcc_tool_x64_ver1.0_build_17111618.tar.gz
mcc_tool_x64_ver1.0_build_17111618/
mcc_tool_x64_ver1.0_build_17111618/dsci_mcc.so
mcc_tool_x64_ver1.0_build_17111618/mxio_mcc.so
mcc_tool_x64_ver1.0_build_17111618/mcc_tool
mcc_tool_x64_ver1.0_build_17111618/mgci_mcc.so

moxa@moxa-virtual-machine:~/Desktop$ cd
mcc_tool_x64_ver1.0_build_17111618/
```

Step 3: Execute MCC_Tool in the unzipped folder and use **-h** command to get all the available functions and option commands of the tool.

```
moxa@moxa-virtual-
machine:~/Desktop/mcc_tool_x64_ver1.0_build_17111618$ ./mcc_tool -h
MCC_Tool ver1.0 Copyright: Moxa Inc.

Usage: ./mcc_tool [function] [options]
Function:
  -fw:      Execute "Firmware related" action.
  -cfg:     Execute "Configuration related" action.
  -pw:      Execute "Password related" action.
  -re:      Execute "Restart related" action.
  -ver:     Show mcc library version.
  -help:    Display version of MCC_Tool and help information.
Options:
  -r:      Report firmware version.
  -up:     Upgrade firmware.
  -ex:     Export the configuration file.
  -im:     Import the configuration file.
  -ch:     Change password.
  -de:     Restart device.
  -sp:     Restart port.
  -i:      Device IP address.
  -il:     IP address list containing 1 IP address per line.
  -d:      Device list.
  -f:      File to be imported or upgraded.
  -nd:     The Device list with new password settings.
  -u:     Device's user account for login.
  -p:     Device's password for login.
  -npw:    The new password for the specific user.
  -dk:     Secret key for import/export configuration.
  -ps:     Specific serial ports to be restarted.
  -o:     Output file name.
  -l:     Export result log file.
  -n:     Keep network settings for configuration import.
  -nr:     Don't reboot device after finishing executing command.
  -print: Print process message for upgrade firmware command.
  -t:     STimeout(sec).

** NOTICE **
If devices can't be found, you can try again with root privilege.
moxa@moxa-virtual-machine:~/Desktop/mcc_tool_x64_ver1.0_build_17111618$
```

2. Getting Started

This chapter covers what functions are supported by MCC_Tool and how users could use a combination of main and optional functions to manage Moxa's edge devices.

Overview

Supported Functions and Command Structure

Users will be able to achieve the following tasks by executing a set of command lines.

1. Report firmware version through a device's IP address or a range of devices specified by IP addresses.
2. Upgrade firmware on a device through the device's IP address or a range of devices specified by IP addresses.
3. Export/Import device configuration through an IP address and or a range of devices specified by IP addresses.
4. Restart command for:
 - a. Restart a list of specific ports on multiple devices.
 - b. Restart a device through a device's IP address or a range of devices specified by IP addresses.
5. Change the password for an existing user of a device through the device's IP address or a range of devices specified by IP addresses.



NOTE

Because of model and firmware differences, the following functions may NOT work:

1. Restart multiple ports on a device
2. Change the password for an existing user (expect the user "admin")
3. Export configuration file with pre-shared key parameters

You may refer to page 11 for the Function Support Table to learn more details.

The **main functions** are defined as below:

Command	Function
-fw	Execute "Firmware related" action.
-cfg	Execute "Configuration related" action.
-pw	Execute "Password related" action.
-re	Execute "Restart related" action.
-ver	Show mcc library and model list version
-install	Update the plugin for the MCC Tool to support new models
-help	Display versino of MCC_Tool and help information

Main functions must be used in conjunction with optional commands to perform management tasks. **Optional commands** are listed in the table below:

Command	Function
-r	Report firmware version.
-up	Upgrade firmware.
-ex	Export the configuration file.
-im	Import the configuration file.
-ch	Change password.
-de	Restart device.
-sp	Restart port.
-i	Device IP address.
-il	IP address list containing 1 IP address per line.
-d	Device list.
-f	File to be imported or upgraded.
-nd	The Device list with new password settings.
-u	Device's user account for login.
-p	Device's password for login.
-npw	The new password for the specific user.
-dk	Cypher key for import/export configuration.
-ps	Specific serial ports to be restarted.
-o	Output file name.
-l	Export result log file.
-n	Keep network settings for configuration import.
-nr	Don't reboot device after finishing executing command.
-print	Print process message for upgrade firmware command
-t	Timeout (sec) .

Device List

As mentioned in a previous section, MCC_Tool supports management tasks for a device or a range of devices. Managing multiple devices via MCC_Tool requires device list(s). MCC_Tool includes an example file of a device list, named DeviceList under Linux and DeviceList.txt under Windows. The format of the device list is:

Model	ServerName	IP	MAC	FwVer	User	PWD	CfgFile	Key	FwFile	Port
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	;	moxa;	;	moxa;	;	;



NOTE

1. To import configuration, identify the CfgFile and Key column.
2. To export configuration, input the pre-shared key under the Key column (This function only works on NPort products).
3. To upgrade firmware, input the firmware name under the FwFile column.
4. To restart a specific port, input the specific port under the Port column (This function only works on the NPort device server products).

Support Product Series

Because of easy maintenance, MCC Tool separates the device support list by independent product line plugin, which includes the E1200_model, I4500_model, MGate model, and NPort_model since version 1.1. In the future, you may update the plugin to support new product models.

Function Support Table

Due to firmware differences, some functions are not available for certain models; you may refer to the table below for function support coverage.

	NPort 6000 Series	NPort IA5000A/5000A Series	MGate 3000 Series	ioLogik E1200 Series	ioThinX 4500 Series
Report firmware versions	✓	✓	✓	✓	✓
Upgrade firmware	✓	Does not support account management (-u)			
Export device's configuration	✓	Does not support account management (-u) Does not support file decryption (-dk)			
Import device's configuration	✓	Does not support account management (-u) Does not support file decryption (-dk)	Does not support account management (-u) Does not support file decryption (-dk) Does not allow device to reject to restart (-nr)		
Restart specific serial port(s)	✓	Does not support account management (-u)	Does not support this command		
Restart the devices	✓	Does not support account management (-u)			
Set password	✓	Does not support account management (-u)	Does not support account management (-u) Does not allow device to reject to restart (-nr)		

Usage Examples of Supported Functions

Report Firmware Versions

Report firmware version of an individual device or a range of devices specified through an IP address list. Output is directed to the screen, unless an output file is specified.

```
MCC_Tool -fw -r -i [ip_address] -o [output_file]
MCC_Tool -fw -r -il [IP_address_list] -o [output_file]
MCC_Tool -fw -r -il [IP_address_list] -o [output_file] -t [timeout_value]
```

Example of the IP address list file of Moxa devices:

```
192.168.1.1;
192.168.1.2;
192.168.1.3;
```

Parameters Description:

Command	Function
-fw	Execute actions for firmware related
-r	Report firmware version
-i	Device's IP address (192.168.1.1)
-il	IP address list containing 1 IP address per line
-o	Output file name (can generate the Device List file)
-l	Export result log file
-t	Timeout (1~120 seconds) Default value: 10 seconds

Example: Obtain firmware version of devices at IP.list and output to DeviceList file

```
MCC_Tool -fw -r -il IP.list -o DeviceList
```

The result log should include the items below:

Model	ServerName	IP	MAC	FwVer	User	PWD	CfgFile	Key	FwFile	Port
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	;	moxa;	;	moxa;	;	;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	1.3;	;	moxa;	;	moxa;	;	;



NOTE

You may use this command to generate the Device List for other function usage. The output value under the PWD and Key columns are dummy values, where you will need to input the password and key information of the device when executing other function commands with the device list. Other columns highlighted will need to be assigned values when executing specific commands, such as importing a configuration file or firmware upgrade.

Upgrade Firmware and Restart the Device

The password(s) must be specified by a command parameter or by the DeviceList file before upgrading the firmware and restarting a specific device (or multiple devices at the same time). After upgrading the firmware, users should use the search command to check whether the device reboots successfully or not.

```
MCC_Tool -fw -up -i [ip_address] -u [user] -p [password] -f [firmware_file] -l [result_log]
```

```
MCC_Tool -fw -up -d [device_list] -l [result_log]
```

```
MCC_Tool -fw -up -d [device_list] -l [result_log] -t [timeout_value]
```

Parameters Description:

Command	Function	Remark
-fw	Execute actions for firmware related	
-up	Upgrade firmware version	
-i	Device's IP address (192.168.1.1)	
-u	Device's user account for login. <i>*This option may only work with the models that have user account management.</i>	Only the NPort 6000 Series supports this command function.
-p	Device's password for login	
-d	Device list	
-f	Firmware file to be upgraded	
-l	Export result log file	
-t	Timeout (1~1200 seconds) Default value: 800 seconds	
-print	Print upgrade process status message	

Example: Upgrade firmware using a device list and capture the results in an import log

```
MCC_Tool -fw -u -d DeviceList -l result_log
```

The result_log should include the items below:

Model	ServerName	IP	MAC	FwFile	ErrCode
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	NP6000_V1.3.rom;	0;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	NP6000_V1.3.rom;	0;

Export/Import Device's Configuration

Export/Import the device configuration for a specific device or a range of devices through the device list file. The password must be specified by parameter or by the device list file. Device configurations are stored in individual files, using device type, IP address, and file creation date as the filename. The result log is directly printed on the screen, or the user can specify a result_log file for it.

```
MCC_Tool -cfg -ex -i [ip_address] -u [user] -p [password] -dk [key] -l
[result_log]
MCC_Tool -cfg -ex -d [device_list] -l [result_log]
MCC_Tool -cfg -ex -d [device_list] -l [result_log] -t [timeout_value]
MCC_Tool -cfg -im -i [ip_address] -u [user] -p [password] -dk [key] -f [cfg_file]
-l [result_log] -n -nr
MCC_Tool -cfg -im -d [device_list] -l [result_log] -n -nr
MCC_Tool -cfg -im -d [device_list] -l [result_log] -t [timeout_value]
```

Parameters Description:

Command	Function	Remark
-cfg	Execute actions for configuration related	
-ex	Export the configuration file	
-im	Import the configuration file	
-i	Device IP address (192.168.1.1)	
-d	Device list	
-u	Device's user account for login	This option may only work with models that have user account management.
-p	Device's password for login	
-dk	<p>When Exporting configuration: The command decrypts the exported file with the pre-shared key. If this parameter is not used, the exported file will be encrypted by the pre-shared key set on the firmware of the device. If this parameter is used, the exported file will be decrypted to a clear-txt file for editing.</p> <p>When Importing configuration: If the configuration file that needs to be imported is encrypted, the command is needed with a pre-shared key. If the import configuration file is without -n, mcc tool will ignore -dk (won't return -11). If the import configuration file is with -n, mcc tool will use a pre-shared key to decrypt the encrypted file. Therefore, if the key is wrong for decrypting the file, mcc tool will return -10. However, if the file is in plain text, and user inputs the pre-shared key, it will ignore the key (won't return -10).*</p> <p>(by parameter -dk or the key column in the device list file)</p>	This option may only work with models that have user account management.
-f	The configuration file to be imported	Only for import configuration function
-n	Keep original network parameters (including IP, subnet mask, gateway, and DNS)	Only for import configuration function
-nr	Do not reboot the device after importing the configuration file	Only for import configuration function. MGate, ioLogik, and ioThinX devices do not support this command.

Command	Function	Remark
-l	Export result log file	
-t	Timeout (1~120 seconds) Export function Default value: 30 seconds Import function Default value: 60 seconds	

Example: Export the configuration using a device list and export the results to a result log

```
MCC_Tool -cfg -ex -d DeviceList -l result_log
```

The result_log should include the following items:

Model	ServerName	IP	MAC	FwVer	ExportCfgFile	Key	ErrCode
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	NP6650_192_168_1_1_20170622.ini;	moxa;	0;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	1.3;	NP6650_192_168_1_2_20170622.ini;	moxa;	0;

Example: Import the configuration to a device list (with restart the units) and export the results to a result log

```
MCC_Tool -cfg -im -d DeviceList -l result_log
```

The result_log should include the items below:

Model	ServerName	IP	MAC	FwVer	CfgFile	Key	ErrCode
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	NP6650_192_168_1_1_20170622.ini	moxa;	0;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	1.3;	NP6650_192_168_1_2_20170622.ini	moxa;	0;

Example: Import the configuration to a device list without restarting the units and export the results to a result log

```
MCC_Tool -cfg -im -d DeviceList -nr -l result_log
```

Restart Specific Serial Ports or the Whole Devices

Restart the specific port(s) or the device itself for an individual device or a range of devices specified by the device list file. The password must be specified by a parameter or by the device list file. Device configurations are stored in individual files, using device type, IP address, and file creation date as the filename. The result log is directly printed on the screen, or users can specify a result_log file for it.

```
MCC_Tool -re -sp -ps [1-4,7] -I [ip_address] -u [user] -p [password] -l
[result_log]
MCC_Tool -re -sp -d [device_list] -l [result_log]
MCC_Tool -re -sp -d [device_list] -l [result_log] -t [timeout_value]
MCC_Tool -re -de -I [ip_address] -u [user] -p [password] -l [result_log]
MCC_Tool -re -de -d [device_list] -l [result_log]
MCC_Tool -re -de -d [device_list] -l [result_log] -t [timeout_value]
```

Parameters Description:

Command	Function	Remark
-re	Execute actions related to restart.	
-sp	Restart specific serial ports on the device. This option may only work with models that support restart ports	MGate and ioLogik devices do not support restart specific port functions.
-de	Restart Device	
-ps	Used for restarting specific ports that assign which serial ports should be restarted	MGate and ioLogik devices do not support restart specific port functions.
-i	Device IP address (192.168.1.1)	
-u	Device's user account for login <i>*This option may only work with the models that have user account management</i>	Only the NPort 6000 Series supports this command function.
-p	Device's password for login	
-d	Device list	
-l	Export result log file	
-t	Timeout (1~120 seconds) Restart device, the default value is 15 seconds Restart port, the default value is 10 seconds	

Example: Restart port using a device list and export the results to a result log

```
MCC_Tool -re -sp -d DeviceList -l result_log
```

The result_log should include items below:

Model	ServerName	IP	MAC	FwVer	Port	ErrCode
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	2-5, 8, 10;	0;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	1.3;	1,2,3;	0;

The serial ports 2-5, 8 and 10 of device 1 (NPort 6650) have been restarted.

Example: Restart device using a device list and export the results to a result log

```
MCC_Tool -re -de -d DeviceList -l result_log
```

The result_log should include the following items:

Model	ServerName	IP	MAC	FwVer	ErrCode
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	0;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	1.3;	0;

Change User's Password on the Device

Set the password of the target device specified by an IP address. The current password must be specified by a parameter or by the Device List file.

```
MCC_Tool -pw -ch -i [ip_address] -u [user] -p [old_password] -npw [new_password]
MCC_Tool -pw -ch -d [device_list] -nd [device_list_new_password] -l [result_log]
MCC_Tool -pw -ch -d [device_list] -nd [device_list_new_password] -l [result_log]
-t [timeout_value]
```

Parameters' Description:

Command	Function	Remark
-pw	Execute actions related to password	
-ch	Change password	
-npw	The new password for the specific user	
-i	Device's IP address (192.168.1.1)	
-u	Device's user account for login <i>*This option may only work with the models that have user account management</i>	Only the NPort 6000 Series supports this command function.
-p	Device's password for login (old password)	
-d	Device list	
-nd	The Device list with new password settings	The user will need to assign a new password in the Device List when using -nd command.
-l	Export result log file	
-nr	Don't reboot device after changing the password.	MGate and ioLogik devices do not support this command.
-t	Timeout (1~120 seconds) Default value: 60 seconds	

Example: Set new password as "5678" then restart the device to make it effective, and print the result on the screen

```
MCC_Tool -pw 5678 -i 192.168.1.1 -u admin -p moxa
```

Example: Set new password from a device list and then restart the device to make it effective, and export the results to a result log

```
MCC_Tool -pw DeviceList_New -d DeviceList -l result_log
```

The result_log should include the items below:

Model	ServerName	IP	MAC	FwVer	User	PWD	ErrCode
NPort6650;	NPort6650_123;	192.168.1.1;	00:90:e8:01:02:03;	1.3;	admin;	5678;	0;
NPort6150;	NPort6150_456;	192.168.1.2;	00:90:e8:04:05:06;	1.3;	admin;	moxa;	0;

Show Support Model List

Show the supported models of the MCC Tool.

```
MCC_Tool -ml
```

Update Plugin

Users may update the Plugin for the MCC Tool to support new models, which may not be included in the current version. The command is as follows below. This function is supported by MCC_Tool version 1.1 and later.

```
MCC_Tool -install "path of the plugin"
```

Error Code Explanation

The MCC_Tool has the same error code for all the command options, refer to below sheet for all the details:

Return Value	Description
0	Successful
-1	Device not found
-2	Password or username does not match
-3	Exceeds the length of the password (Only applied to NPort 5100 & 5200)
-4	Failed to open the file If the target file path exists, make sure you have the privilege to the target path
-5	The action timed out
-6	Import failed
-7	Firmware upgrade failed
-8	Exceeds the length of the new password (Only applied to NPort 5100 & 5200)
-9	Fail to set restart port index
-10	Cipher key for decrypting the configuration file is mismatched
-11	Invalid parameter E.g., <ol style="list-style-type: none"> Input parameters are not described above The parameters do not work for some devices (e.g., -u for the MGate MB3000 Series, which does not support user account functions, or -dk for the NPort 5000A Series, which does not support pre-shared key function) Using device list file should not input -i, -u, -p, or -npw Newly set password over the limit
-12	Unsupported command E.g., execute restart specific port command (MCC_Tool -re -sp) for the MGate MB3000 Series will get error code -12
-13	A lack of information in the device list If a specific NPort only exists in the device_list_new_password but not in the device_list (original device list with old password), then an error will occur.
-14	A lack of information in the new password list If there is no new password in the device_list_new_password but the device exists in the original device list, then an error will occur.
-15	Not executable due to an error of other devices in the list
-16	The MCC_Tool does not support the firmware version of the device. Upgrade the device to the supported firmware version (reference to the "Support Models" section on p4.)
-17	The device is still in the default state. Create a password and then execute the import.
Other value	Contact Moxa