

NPort 5600 Series

8 and 16-port RS-232/422/485 rackmount serial device servers



Features and Benefits

- Standard 19-inch rackmount size
- Easy IP address configuration with LCD panel (excluding wide-temperature models)
- Configure by Telnet, web browser, or Windows utility
- Socket modes: TCP server, TCP client, UDP
- SNMP MIB-II for network management
- Universal high-voltage range: 100 to 240 VAC or 88 to 300 VDC
- Popular low-voltage ranges: ± 48 VDC (20 to 72 VDC, -20 to -72 VDC)

Certifications



Introduction

With the NPort® 5600 Rackmount Series, you not only protect your current hardware investment, but also allow for future network expansion by centralizing the management of your serial devices and distributing management hosts over the network.

Network Readiness for up to 16 Serial Devices

Only basic configuration is needed with the NPort® 5600 to connect up to 16 serial devices to an Ethernet network.

19-Inch Rackmount Device Server

NPort® 5600 device servers come with Tx/Rx LEDs for the serial ports on the front panel, and 8 or 16 RJ45 serial port connectors on the rear panel. This makes the NPort® 5600 device servers suitable for a standard 19-inch rackmount, allowing you to simplify operational, maintenance, and administrative tasks.

Real COM/TTY Ports

Real COM/TTY drivers are provided to make the serial ports on the NPort® 5600 recognizable as Real COM ports by Windows, or Real TTY ports by Linux. In addition to supporting basic data transmission and reception, the NPort® drivers also support the RTS, CTS, DTR, DSR, and DCD control signals.

LED Indicators to Ease Your Maintenance Tasks


The System LED, serial Tx/Rx LEDs, and Ethernet LEDs (located on the RJ45 connector) provide a great tool for basic maintenance tasks and help engineers analyze problems in the field. The LEDs not only indicate current system and network status, but they also help field engineers monitor the status of attached serial devices.

Adjustable Termination and Pull High/Low Resistors

When using termination resistors to prevent serial signal reflection, it is important to set the pull high/low resistors correctly so that the electrical signal is not corrupted. Since no set of resistor values is universally compatible for all environments, the NPort® 5650-8/16 has DIP switches on the bottom panel for setting the termination and pull high/low resistor values.



Appearance

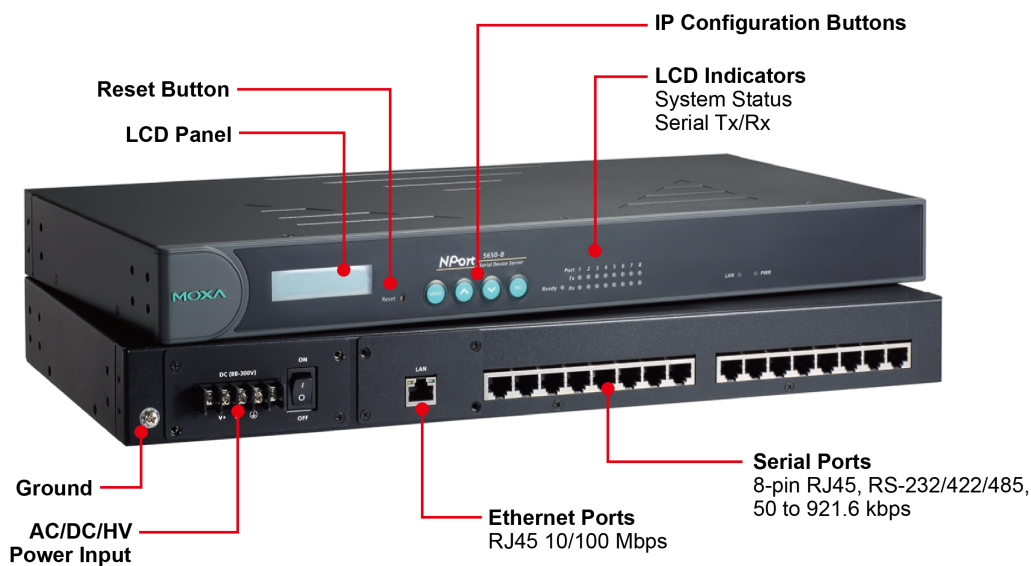

Note: LCD panel and configuration buttons not available with wide-temp. models

Specifications

Ethernet Interface						
10/100BaseT(X) Ports (RJ45 connector)		1				
Magnetic Isolation Protection		1.5 kV (built-in)				
Optical Fiber				100BaseFX		
				Multi-Mode		Single-Mode
		Fiber Cable Type		OM1	50/125 μm	G.652
					800 MHz x km	
		Typical Distance		4 km	5 km	40 km
		Wavelength	Typical (nm)	1300		1310
			TX Range (nm)	1260 to 1360		1280 to 1340
			RX Range (nm)	1100 to 1600		1100 to 1600
		Optical Power	TX Range (dBm)	-10 to -20		0 to -5
			RX Range (dBm)	-3 to -32		-3 to -34
			Link Budget (dB)	12		29
			Dispersion Penalty (dB)	3		1
		Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.				
		Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).				

Ethernet Software Features	
Configuration Options	Telnet Console Web Console (HTTP/HTTPS) Windows Utility
Management	ARP, BOOTP, DHCP Client, DNS, HTTP, HTTPS, ICMP, IPv4, LLDP, RFC2217, Rtelnet, PPP, SLIP, SMTP, SNMPv1/v2c, TCP/IP, Telnet, UDP
Filter	IGMP v1/v2c

Windows Real COM Drivers	Windows 11, 10, 8.1, 8, 7, Vista, XP, ME, 98, and 95 Windows Server 2025, 2022, 2019, 2016, 2012 R2, 2012, 2008 R2, 2008, 2003, 2000, and NT Windows Embedded CE 6.0 and 5.0, Windows XP Embedded
Linux Real TTY Drivers	Kernel versions 6.x, 5.x, 4.x, 3.x, 2.6.x, and 2.4.x
Fixed TTY Drivers	macOS versions: 26, 15, 14, 13, 12, 11, and 10.1x
Arm®-based Platform Support	Windows 11 Linux Kernel 6.x, 5.x, and 4.x macOS 11 and higher
Virtual Machine	VMWare ESXi (Windows 11/10) VMware Fusion (Windows on macOS 10.1x and higher) Parallels Desktop (Windows on macOS 10.1x and higher)
Android API	Android 3.1.x and later
Time Management	SNTP

Security Functions

Authentication	Local database
Encryption	HTTPS AES-128 RSA-1024 SHA-1 SHA-256
Security Protocols	HTTPS (TLS 1.2) SNMPv3

Serial Interface

Connector	8-pin RJ45
No. of Ports	8 ports (NPort 5600-8 models) or 16 ports (NPort 5600-16 models)
Serial Standards	NPort 5610 models: RS-232 NPort 5630 models: RS-422, RS-485 NPort 5650 models: RS-232, RS-422, RS-485
Baudrate	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k, 460.8k, 921.6k
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None RTS/CTS (RS-232 only) DTR/DSR (RS-232 only) XON/XOFF
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	120 ohms
RS-485 Data Direction Control	Automatic Data Direction Control (ADDC)
Operation Modes	Real COM, TCP Client, TCP Server, UDP, Ethernet Modem, Pair Connection, Reverse Telnet, RFC2217, Disabled

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Current	NPort 5610-8-48V/16-48V: 135 mA @ 48 VDC NPort 5650-8-HV-T/16-HV-T: 152 mA @ 88 VDC NPort 5610-8/16: 141 mA @ 100 VAC NPort 5630-8/16: 152 mA @ 100 VAC NPort 5650-8/8-T/16/16-T: 158 mA @ 100 VAC NPort 5650-8-M-SC/16-M-SC: 174 mA @ 100 VAC NPort 5650-8-S-SC/16-S-SC: 164 mA @ 100 VAC
Input Voltage	HV models: 88 to 300 VDC AC models: 100 to 240 VAC, 47 to 63 Hz DC models: $\pm$ 48 VDC, 20 to 72 VDC, -20 to -72 VDC

Reliability

Automatic Reboot Trigger	Built-in WDT
--------------------------	--------------

Physical Characteristics

Housing	Metal
Dimensions (with ears)	NPort 5650-8, NPort 5650-8-T: 482.60 x 43.65 x 198.25 mm (19.00 x 1.72 x 7.80 in) All other models: 480 x 45.5 x 198.25 mm (18.90 x 1.79 x 7.80 in)
Dimensions (without ears)	NPort 5650-8/5650-8-T: 440 x 43.65 x 198.25 mm (17.32 x 1.72 x 7.80 in) All other models: 440 x 45.5 x 198.25 mm (17.32 x 1.79 x 7.80 in)
Weight	NPort 5610-8: 2,290 g (5.05 lb) NPort 5650-8-M-SC: 2,380 g (5.25 lb) NPort 5650-8/5650-8-T: 2,430 g (5.36 lb) NPort 5650-8-S-SC/16-M-SC: 2,440 g (5.38 lb) NPort 5610-16: 2,490 g (5.49 lb) NPort 5650-16-S-SC: 2,500 g (5.51 lb) NPort 5630-8/5650-16/5650-16-T: 2,510 g (5.53 lb) NPort 5630-16: 2,560 g (5.64 lb) NPort 5610-8-48V: 3,160 g (6.97 lb) NPort 5610-16-48V: 3,260 g (7.19 lb) NPort 5650-8-HV-T: 3,720 g (8.20 lb) NPort 5650-16-HV-T: 3,820 g (8.42 lb)
Installation	19-inch rack mounting
Interactive Interface	LCD panel display (standard temp. models only) Push buttons for configuration (standard temp. models only)

Environmental Limits

Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) Wide temp. models: -40 to 75°C (-40 to 167°F) High-voltage wide temp. models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	Standard models: -20 to 70°C (-4 to 158°F) Wide temp. models: -40 to 75°C (-40 to 167°F) High-voltage wide temp. models: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	NPort 5650-8/16 models: IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 IEC 61000-4-11 NPort 5650-8/16-HV models: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8
Safety	UL 62368-1
Medical	EN 55011: 2007+A2: 2007 Class A (Group 1) compliant EN 60601-1-2: 2007 compliant

MTBF

Time	NPort 5610-8: 903,009 hrs NPort 5610-8-48V: 892,692 hrs NPort 5630-8: 844,009 hrs NPort 5650-8: 754,927 hrs NPort 5650-8-T: 776,469 hrs NPort 5650-8-M-SC/8-S-SC: 738,291 hrs NPort 5650-8-HV-T: 716,168 hrs NPort 5610-16: 680,154 hrs NPort 5610-16-48V: 693,529 hrs NPort 5630-16: 618,263 hrs NPort 5650-16: 525,107 hrs NPort 5650-16-T: 533,046 hrs NPort 5650-16-M-SC/16-S-SC: 517,019 hrs NPort 5650-16-HV-T: 506,093 hrs
Standards	HV models: Telcordia (Bellcore) Standard TR/SR All other models: MIL-HDBK-217F

Warranty

Warranty Period	5 years
Details	See www.moxa.com/warranty


Package Contents

Device	1 x NPort 5600 Series device server
Installation Kit	1 x rack-mounting kit
Cable	1 x power cord, suitable for your region (AC models)
Documentation	1 x quick installation guide 1 x warranty card

Dimensions


NPort 5650-8 Models

Unit: mm (inch)

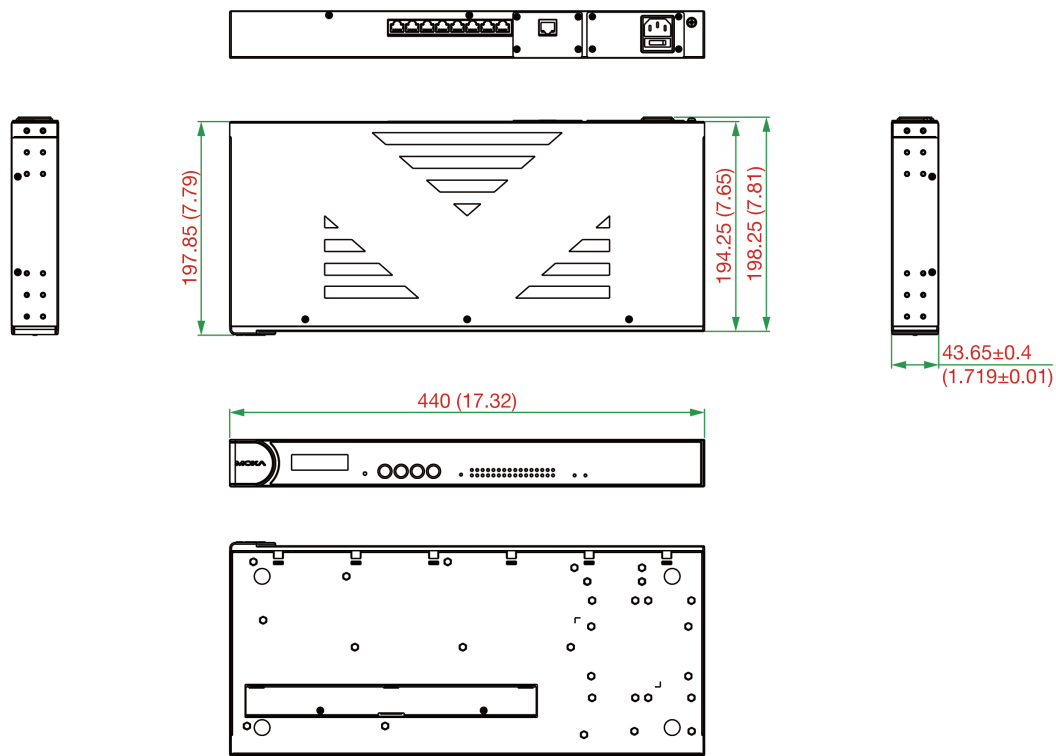

All Other Models (uses NPort 5650-16 as reference)

Unit: mm (inch)

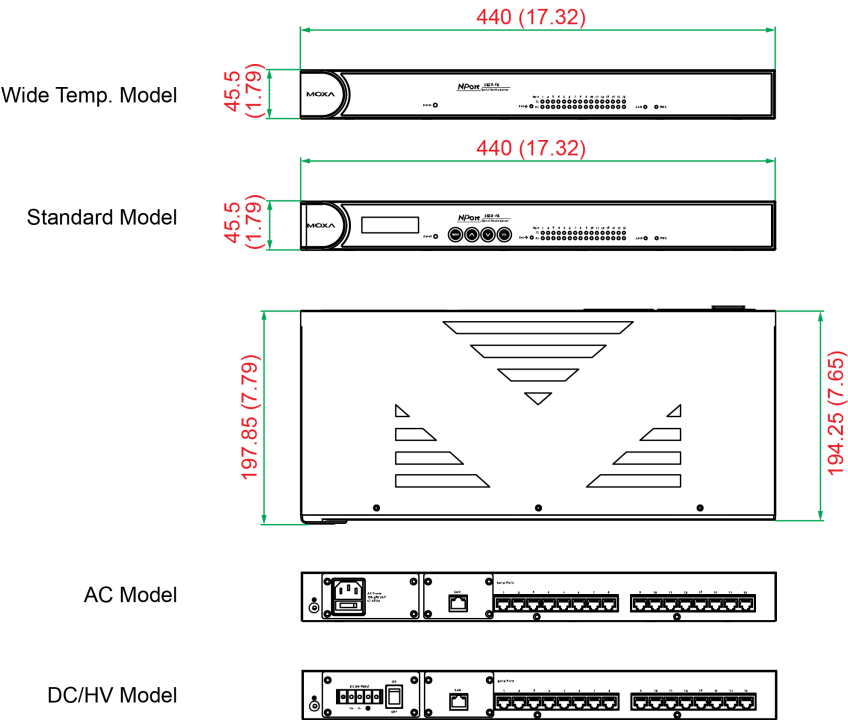

Ordering Information

Model Name	Ethernet Interface Connector	Serial Interface	No. of Serial Ports	Operating Temp.	Input Voltage
NPort 5610-8	8-pin RJ45	RS-232	8	0 to 60°C	100-240 VAC
NPort 5610-8-48V	8-pin RJ45	RS-232	8	0 to 60°C	±48 VDC
NPort 5630-8	8-pin RJ45	RS-422/485	8	0 to 60°C	100-240 VAC
NPort 5610-16	8-pin RJ45	RS-232	16	0 to 60°C	100-240 VAC
NPort 5610-16-48V	8-pin RJ45	RS-232	16	0 to 60°C	±48 VDC
NPort 5630-16	8-pin RJ45	RS-422/485	16	0 to 60°C	100-240 VAC
NPort 5650-8	8-pin RJ45	RS-232/422/485	8	0 to 60°C	100-240 VAC
NPort 5650-8-M-SC	Multi-mode fiber SC	RS-232/422/485	8	0 to 60°C	100-240 VAC
NPort 5650-8-S-SC	Single-mode fiber SC	RS-232/422/485	8	0 to 60°C	100-240 VAC
NPort 5650-8-T	8-pin RJ45	RS-232/422/485	8	-40 to 75°C	100-240 VAC
NPort 5650-8-HV-T	8-pin RJ45	RS-232/422/485	8	-40 to 85°C	88-300 VDC
NPort 5650-16	8-pin RJ45	RS-232/422/485	16	0 to 60°C	100-240 VAC
NPort 5650-16-M-SC	Multi-mode fiber SC	RS-232/422/485	16	0 to 60°C	100-240 VAC
NPort 5650-16-S-SC	Single-mode fiber SC	RS-232/422/485	16	0 to 60°C	100-240 VAC
NPort 5650-16-T	8-pin RJ45	RS-232/422/485	16	-40 to 75°C	100-240 VAC
NPort 5650-16-HV-T	8-pin RJ45	RS-232/422/485	16	-40 to 85°C	88-300 VDC

Accessories (sold separately)

Cables

CBL-RJ45F25-150	8-pin RJ45 to DB25 female serial cable, 1.5 m
CBL-RJ45F9-150	8-pin RJ45 to DB9 female serial cable, 1.5m
CBL-RJ45M9-150	8-pin RJ45 to DB9 male serial cable, 1.5m
CBL-RJ45SF9-150	8-pin RJ45 to DB9 female serial cable with shielding, 1.5m
CBL-RJ45SF25-150	8-pin RJ45 to DB25 female serial cable with shielding, 1.5m
CBL-RJ45SM25-150	8-pin RJ45 to DB25 male serial cable with shielding, 1.5m
CBL-RJ45SM9-150	8-pin RJ45 to DB9 male serial cable with shielding, 1.5m
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-RJ458P-100	8-pin RJ45 CAT5 Ethernet cable, 1 m
CBL-RJ458P-Cisco-BK-180	8-pin RJ45 to 8-pin RJ45 serial cable, 1.8 m, for Cisco console port

Connectors

ADP-RJ458P-DB9F	DB9 female to RJ45 connector
ADP-RJ458P-DB9M	RJ45 to DB9 male connector

Power Cords

PWC-C13AU-3B-183	Power cord with AU plug, 1.83 m
PWC-C13CN-3B-183	Power cord with three-prong CN plug, 1.83 m
PWC-C13EU-3B-183	Power cord with EU/KR plug, 1.83 m
PWC-C13JP-3B-183	Power cord with JP plug plug, 7A/125V, 1.83 m

PWC-C13UK-3B-183	Power cord with UK plug, 1.83 m
PWC-C13US-3B-183	Power cord with US plug, 1.83 m

Rack-Mounting Kits

RK-56-01	Rack-mounting kit, 2 L-shaped plates (43.65 x 57 x 2.5 mm), 12 FMS M3x8L black screws Applicable Models: NPort 5650-8 NPort 5650-8-T
WK-45-01	Rack-mounting kit, 2 L-shaped plates, 8 screws, 45 x 57 x 2.5 mm Applicable Models: NPort 5610-8 NPort 5610-8-48V NPort 5630-8 NPort 5650-8-HV-T NPort 5650-8-S-SC NPort 5650-8-M-SC NPort 5610-16 NPort 5610-16-48V NPort 5630-16 NPort 5650-16 NPort 5650-16-T NPort 5650-16-HV-T NPort 5650-16-S-SC NPort 5650-16-M-SC

© Moxa Inc. All rights reserved. Updated Aug 22, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.