

V1200 系列

ARM 架構輕巧型軌道電腦，支援無線與行動網路擴充選配



特色與優點

- Arm Cortex-A53 四核心 1.6 GHz 處理器
- 纖薄、輕巧設計，提供多種安裝選項
- 整合式 5G Sub-6GHz NR 模組與 Wi-Fi 6 模組，支援雙 SIM 卡
- 內建 TPM 2.0 模組
- 內建 Moxa Industrial Linux，提供長期維護支援
- 隔離式電源，電源供應範圍為 24 至 110 VDC
- 符合所有 EN 50155 規範強制性測試項目¹

認證



簡介


V1200 運算平台專為軌道 TCMS 資料擷取應用與車對地應用所設計。電腦配備雙 M12 10/100/1000 Mbps 乙太網路連接埠、內建 5G 與 Wi-Fi 6 模組及雙 RS-232/422/485 系列連接埠。輕薄、輕巧設計，提供多種安裝選項，能有效節省空間並靈活安裝於各式車載機櫃或設備區域。

V1200 採用 Moxa Industrial Linux (MIL) 並提供長期維護支援及漏洞修補功能。提供網頁式介面，可輕鬆設定乙太網路與無線網路，無需程式設計。

V1200 無線型號經過嚴格的測試驗證，符合 EN 50155 強制測試項目與 OT4 操作溫度規範（於啟用行動與 Wi-Fi 模組時支援 -40 至 70°C），適用於各類寬溫應用場景。



外觀

V1202-CT-T 型號


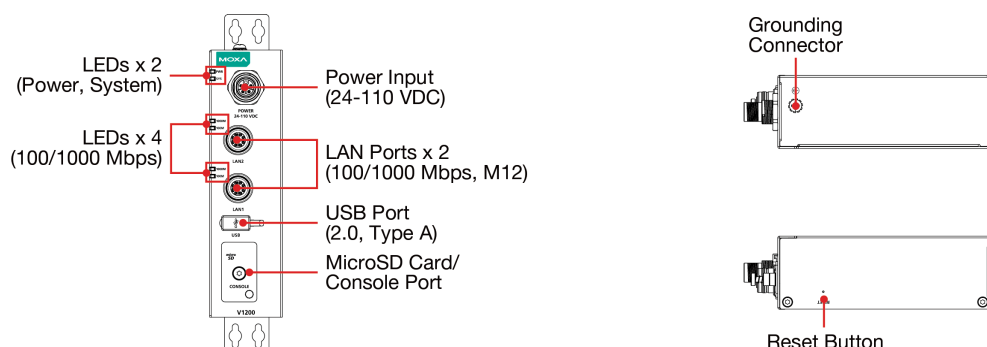


1. 此產品適用於符合 EN 50155 標準所定義的所有軌道車輛應用。按此處取得更詳細內容：www.moxa.com/doc/specs/EN_50155_Compliance.pdf

V1222-CT-T 型號

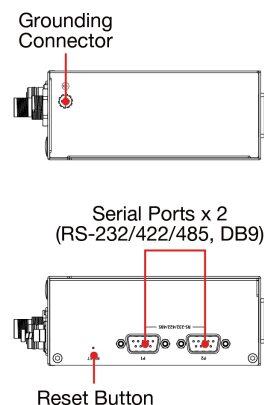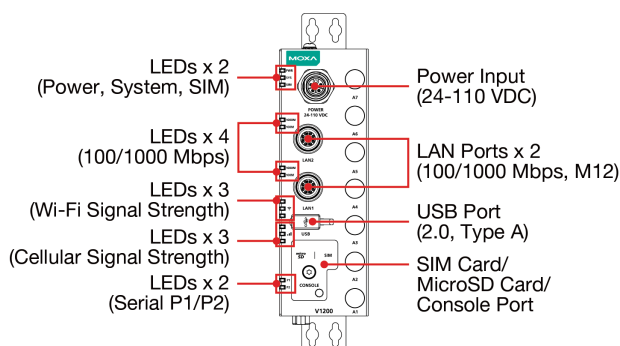

V1222-W-CT-T 型號

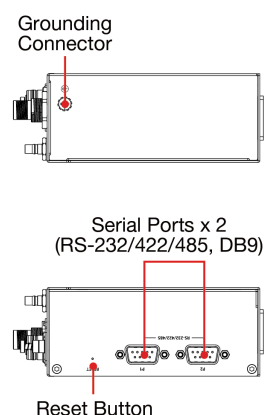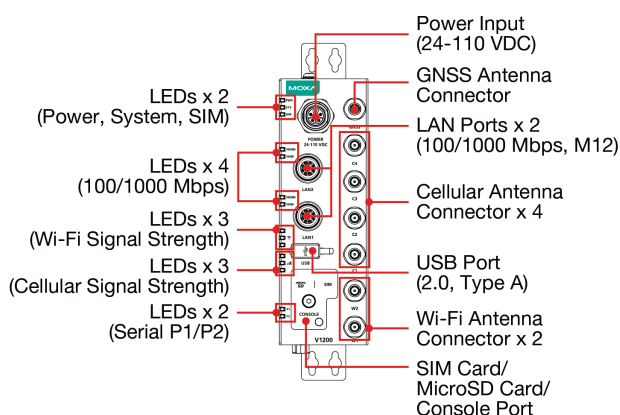

規格

Computer

CPU	Arm Cortex-A53 quad-core 1.6 GHz
DRAM	4 GB LPDDR4
Supported OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10), 2031 EOL See www.moxa.com/MIL
Storage Pre-installed	16 GB eMMC
Expansion Slots	microSD socket x 1

Computer Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (M12 X-coded) x 2
Serial Ports	V1222-CT-T, V1222-W-CT-T: RS-232/422/485 ports x 2 (software-selectable, DB9 male connector)
USB 2.0	USB 2.0 hosts x 1, type-A connectors
Wi-Fi Antenna Connector	V1222-CT-T, V1222-W-CT-T: QMA x 2
Cellular Antenna Connector	V1222-CT-T, V1222-W-CT-T: QMA x 4
GPS Antenna Connector	V1222-CT-T, V1222-W-CT-T: QMA x 1
Console Port	3-pin header output (115200, n, 8, 1)
Expansion Slots	M.2 E-key slot x1 (for Wi-Fi 6) M.2 B-key slot x1 (for 5G)

	mPCIe slot x1 (for LTE) Note: 5G and LTE cannot be operated at the same time.
SIM Format	V1222-CT-T, V1222-W-CT-T: Nano
Number of SIMs	V1222-CT-T: 2 for 5G or 2 for LTE V1222-W-CT-T: 2 for 5G
Buttons	Reset button
TPM	TPM v2.0

Serial Interface

No. of Ports	V1222-CT-T, V1222-W-CT-T: 2
Baudrate	50 bps to 921.60 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	RTS/CTS, XON/XOFF ADDC (automatic data direction control) for RS-485 RTS Toggle (RS-232 only)
Isolation	N/A

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

Cellular Interface

5G NR Bands	5G NSA and SA bands: n1 (2100 MHz), n2 (1900 MHz), n3 (1800 MHz), n5 (850 MHz), n7 (2600 MHz), n8 (900 MHz), n20 (800 MHz), n25 (1900 MHz), n28 (700 MHz), n30 (2300 MHz), n38 (2600 MHz), n41 (2500 MHz), n48 (3600 MHz), n66 (1700 MHz), n71 (600 MHz), n75 (1500 MHz), n77 (3700 MHz), n78 (3500 MHz), n79 (4500 MHz)
LTE Bands	B1 (2100 MHz), B2 (1900 MHz), B3 (1800 MHz), B4 (1700 MHz), B5 (850 MHz), B7 (2600 MHz), B8 (900 MHz), B12 (700 MHz), B13 (700 MHz), B14 (700 MHz), B17 (700 MHz), B18 (800 MHz), B19 (800 MHz), B20 (800 MHz), B25 (1900 MHz), B26 (850 MHz), B28 (700 MHz), B29 (700 MHz), B30 (2300 MHz), B32 (1500 MHz), B34 (2000 MHz), B38 (2600 MHz), B39 (1900 MHz), B40 (2300 MHz), B41 (2500 MHz), B42 (3500 MHz), B43 (3600 MHz), B46 (5200 MHz), B48 (3600 MHz), B66 (1700 MHz), B71 (600 MHz)
UMTS/HSPA Bands	B1 (2100 MHz) B2 (1900 MHz) B4 (1700 MHz) B5 (850 MHz) B6 (850 MHz) B8 (900 MHz) B19 (800 MHz)

GPS Interface

Frequency Range	Wide-band GNSS: 1559 to 1606 MHz (recommended) GPS: BW NB GPS 2.046 MHz (centered at 1575.42 MHz) GLONASS: BW 8.3 MHz approx. (1597.05 to 1606 MHz) BeiDou: 4.092 MHz BW (1559.05 to 1563.14 MHz) Galileo: 4.092 MHz BW (centered at 1575.42 MHz)
Antenna Types Supported	Active antenna (default) Passive antenna
Time to First Fix (TTFF)	Hot start: 1 s Warm start: 27 s Cold start: 28 s
Sensitivity	Cold starts: -146 dBm Tracking: -161 dBm Acquisition: -148 dBm
Update Rate	Minimum 1 Hz

WLAN Interface

WLAN Standards	802.11a/b/g/n/ac/ax
Frequency Band	2.4 GHz / 6 GHz 2.4 GHz / 5 GHz

LED Indicators

System	Power x 1 System x 1 SIM card indicator x 1
LAN	2 ports, 1 per port (10/100/1000 Mbps)
Serial	V1222-CT-T, V1222-W-CT-T: 1 LED per port for 2 serial ports
Wireless Signal Strength	Cellular x 3 Wi-Fi x 3

Power Parameters

No. of Power Inputs	1
Input Voltage	24 to 110 VDC
Input Current	V1202-CT-T: 0.4 A @ 24 VDC, 0.1A @ 110 VDC V1222-W-CT-T: 0.48 A @ 24 VDC, 0.105A @ 110 VDC
Power Consumption	V1202-CT-T: 7.4 W at 95% CPU loading V1222-W-CT-T: 13 W (with 5G & Wi-Fi) at 95% CPU loading
Power Connector	M12 K-code power connector
Reverse Polarity Protection	Supported

Reliability

Automatic Reboot Trigger	External RTC (real-time clock)
Alert Tools	External WDT (watchdog timer)

Physical Characteristics

Housing	Metal SECC
IP Rating	IP40

Dimensions	V1202-CT-T: 150 x 120 x 41 mm V1222-CT-T / V1222-W-CT-T: 150 x 120 x 50 mm
Weight	V1202-CT-T: 665g (without mount ears) V1222-W-CT-T : 1000g (without mount ears)
Installation	Wall mounting (standard) Desk mounting (with optional kit) DIN-rail mounting (with optional kit)

Environmental Limits

Operating Temperature	With Cellular and Wi-Fi: -40 to 70°C (-40 to 158°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: line-to-line 2 kV, Signal: line-to-ground 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz; Signal: 10 V IEC 61000-4-8 PFMF
Cellular Standards	EN 301 908-1 (WCDMA/LTE) EN 301 489-1/-19 (GPS) EN 301 489-1/-52 (WCDMA/LTE) EN 303 413 (GPS)
WLAN Standards	EN 303 687 (6 GHz) EN 301 893 (5 GHz) EN 301 489-1-17 EN 300 328 (2.4 GHz)
Radio Frequency	FCC RCM CE (RED) UKCA EN 62311
International Approval	FCC CE UKCA RCM (V1202-CT-T and V1222-CT-T) BSMI (V1222-CT-T)
Safety	IEC 62368-1 UL 62368-1
Railway Fire Protection	EN 45545-2 NFPA130
Railway	EN 50155: 2021 EN 50121-4
Shock	IEC 60068-2-27 IEC 61373 EN 50155

Vibration	IEC 60068-2-64 IEC 61373 EN 50155
Green Product	RoHS, CRoHS, WEEE

MTBF

Time	V1202-CT-T: 2,755,789 hrs V1222-CT-T: 1,430,568 hrs V1222-W-CT-T: 1,324,329 hrs
Standards	Telcordia Standard SR332 Issue 4

Warranty

Warranty Period	5 years
Details	See www.moxa.com/tw/warranty


Package Contents

Device	1 x V1200 Series computer
Installation Kit	1 x wall-mounting kit
Documentation	1 x quick installation guide 1 x warranty card

尺寸


含標準壁掛安裝套件

單位：公釐

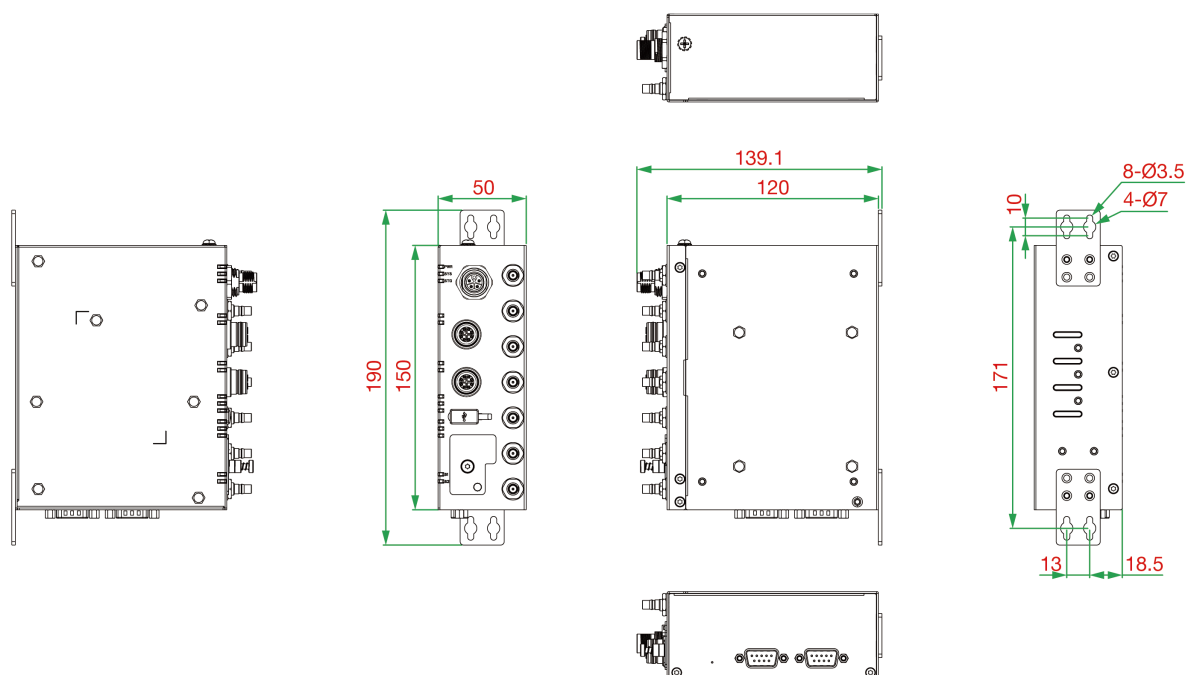


含 選配桌面安裝套件

單位：公釐

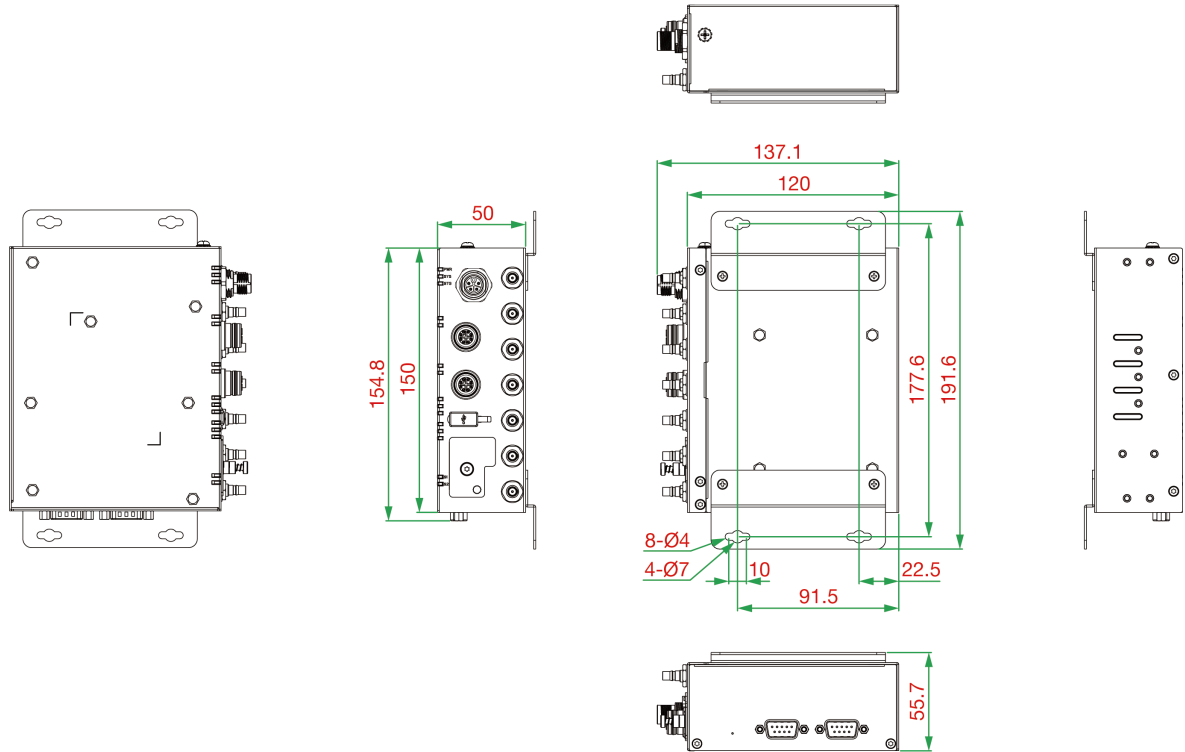

含 選配 Din 軌道安裝套件

單位：公釐

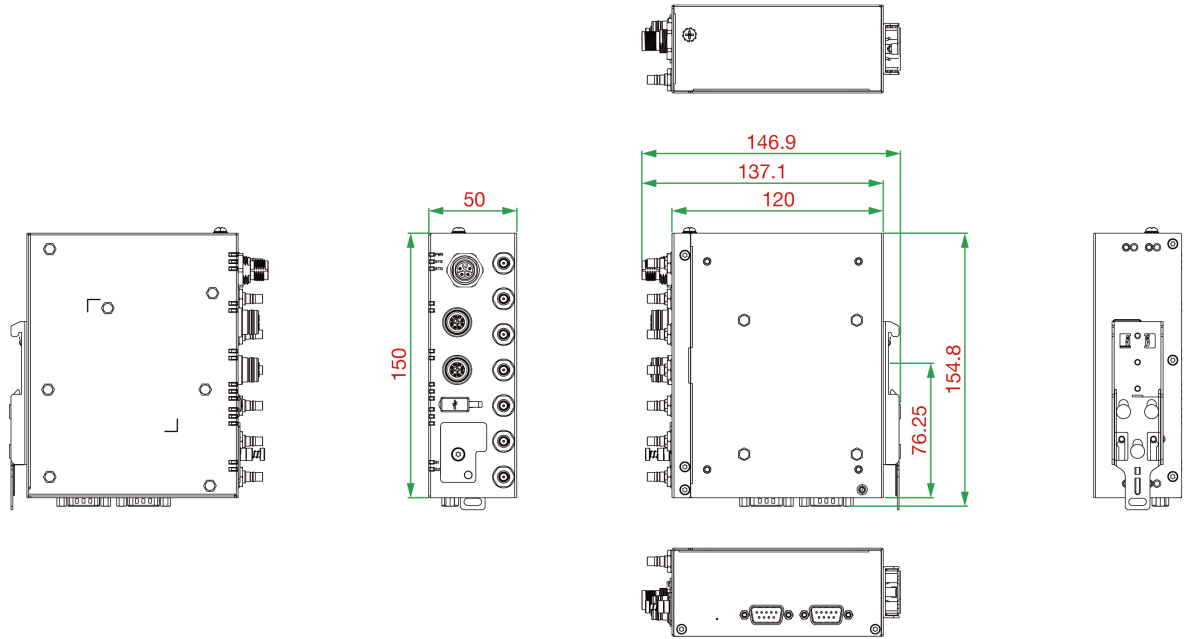

訂購資訊

Model Name	CPU	eMMC	LPDDR4	GbE Ports	Serial Ports	Wireless	Operating Temperature	Conformal Coating
V1202-CT-T	Arm Cortex-A53 quad-core 1.6 GHz	16 GB	4 GB	2	N/A	N/A	-40 to 70°C	√

配件（選購）

Cables

CBL-M12KFF5POPEN-O-150-IP67	K-coded female M12-to-5-pin open wire power cable, orange, IP67-rated, 1.5 m
CBL-M12XMM8P-Y-300-IP67	X-coded male M12-to-8-pin open wire cable, yellow, IP67-rated, 3 m
CBL-M12XMM8P-Y-100-IP67	X-coded male M12-to-8-pin open wire cable, yellow, IP67-rated, 1 m
CBL-M12XMM8PRJ45-Y-200-IP67	X-coded male M12-to-RJ45 Ethernet cable, yellow, IP67-rated, 2 m

© Moxa Inc. 版權所有.2025 年 6 月 02 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。