

ioPAC 6500 系列 (65M) 通訊模組：

用於模組化程控 IIN 控制器的通訊模組



特色與優點

- 支援多種 IT/OT 通訊協定，實現 SCADA、工廠資訊系統和雲端應用程式之間的無縫通訊
- 免工具硬體安裝和熱插拔設計，最大限度地提高操作效率
- 全模組化設計，實現最大部署彈性
- Turbo Ring、Turbo Chain，以及透過 RSTP/STP 協議支援網路備援

認證



簡介


ioPAC 6500 系列（也稱為智慧型整合節點或 IIN）是一種進階型 Linux 架構 RTU，具備內建的 Layer-2 網管型交換器。ioPAC 6500 系列配備 Arm Cortex-A53 四核心 CPU，可提供強大的效能。

網路冗餘



全模組化設計

ioPAC 6500 系列採用獨特的樂高式機械設計，可在最小化安裝工作的同時實現靈活部署。該系列可分為以下元件：背板模組、電源模組、通訊模組、擴充模組、CPU 模組、I/O 模組和端子台模組。

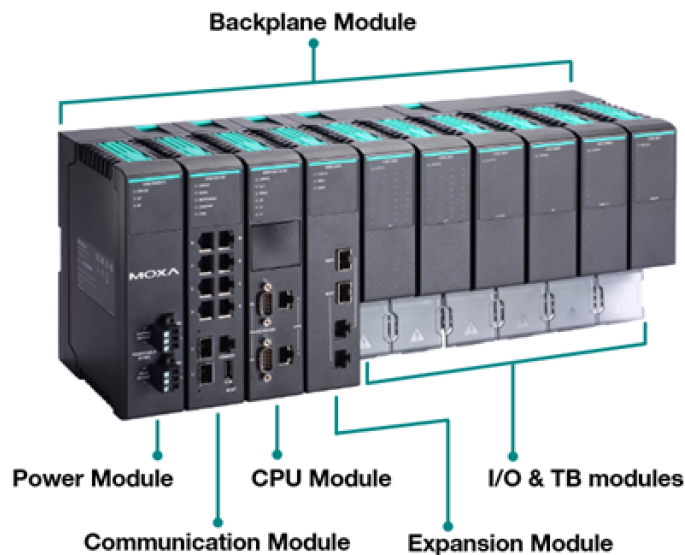

規格

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	8 Auto MDI/MDI-X connection Auto negotiation speed Full/Half duplex mode
100/1000BaseSFP Slots	2
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication

Ethernet Software Features

Management	IPv4/IPv6 Flow control Back Pressure Flow Control DHCP Server/Client ARP RARP LLDP Port Mirroring Linkup Delay SMTP SNMP Trap SNMP Inform SNMPv1/v2c/v3 RMON TFTP SFTP HTTP HTTPS Telnet Syslog Private MIB Fiber check
Filter	GMRP GVRP

	GARP 802.1Q VLAN IGMP Snooping v1/v2/v3 IGMP Querier
Redundancy Protocols	STP RSTP Turbo Ring v2 Turbo Chain Ring Coupling Dual Homing Link Aggregation
Security	Broadcast storm protection Rate Limit Trust access control Static Port Lock Sticky MAC HTTPS/SSL SSH RADIUS TACACS+ Login and Password Policy
Time Management	SNTP NTP Server/Client NTP Authentication
Protocols	IPv4/IPv6 TCP/IP UDP ICMP ARP RARP TFTP DNS NTP Client DHCP Server DHCP Client 802.1X QoS HTTPS HTTP Telnet SMTP SNMPv1/v2c/v3 RMON Syslog
MIB	P-BRIDGE MIB Q-BRIDGE MIB IEEE8021-SPANNING-TREE-MIB IEEE8021-PAE-MIB IEEE8023-LAG-MIB LLDP-EXT-DOT1-MIB LLDP-EXT-DOT3-MIB SNMPv2-MIB RMON MIB Groups 1, 2, 3, 9

Switch Properties

MAC Table Size	16 K
Jumbo Frame Size	9.216 KB
Max. No. of VLANs	256
VLAN ID Range	VID 1 to 4094
IGMP Groups	512

Priority Queues	4
Packet Buffer Size	1 MB
Serial Interface	
Console Port	RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)
Input/Output Interface	
Buttons	Reset button
USB Ports	USB 2.0 Type A (only supports Moxa's ABC-02-USB backup and storage device)
Power Parameters	
Input Current	0.9 A @ 12 VDC
Physical Characteristics	
Housing	Plastic
Dimensions	42 x 177 x 131.5 mm (1.65 x 6.97 x 5.18 in)
Weight	660 g (1.46 lb)
Installation	DIN-rail mounting Rack mounting (with optional kit)
Environmental Limits	
Operating Temperature	-40 to 75°C (-40 to 167°F) (with SFP module installed) Note: Proper airflow is required in an environment with temperature > 65°C
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	2000 m ¹
Standards and Certifications	
EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: (DC) 10 V; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Safety	UL 61010-2-201 UL 61010-1
Shock	IEC 60068-2-27 Half sine wave; acceleration: 15 g; time: 11 ms
Vibration	IEC 60068-2-6 DIN-rail mounted: 7 mm peak-peak (p-p) (2 to 8.42 Hz), 1 g (8.42 to 150 Hz) Rack mounted (with optional kit): 7 mm peak-peak (p-p) (2 to 8.42 Hz), 0.5 g (8.42 to 150 Hz)

1. 如果您需要產品能在高海拔地區正常運作，請與 Moxa 聯繫。

Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

MTBF

Time	3,104,403 hrs
Standards	Telcordia Standard SR-332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x ioPAC 6500 Series (65M) Communication Module
Documentation	1 x quick installation guide 1 x warranty card

尺寸

單位：公釐（英吋）

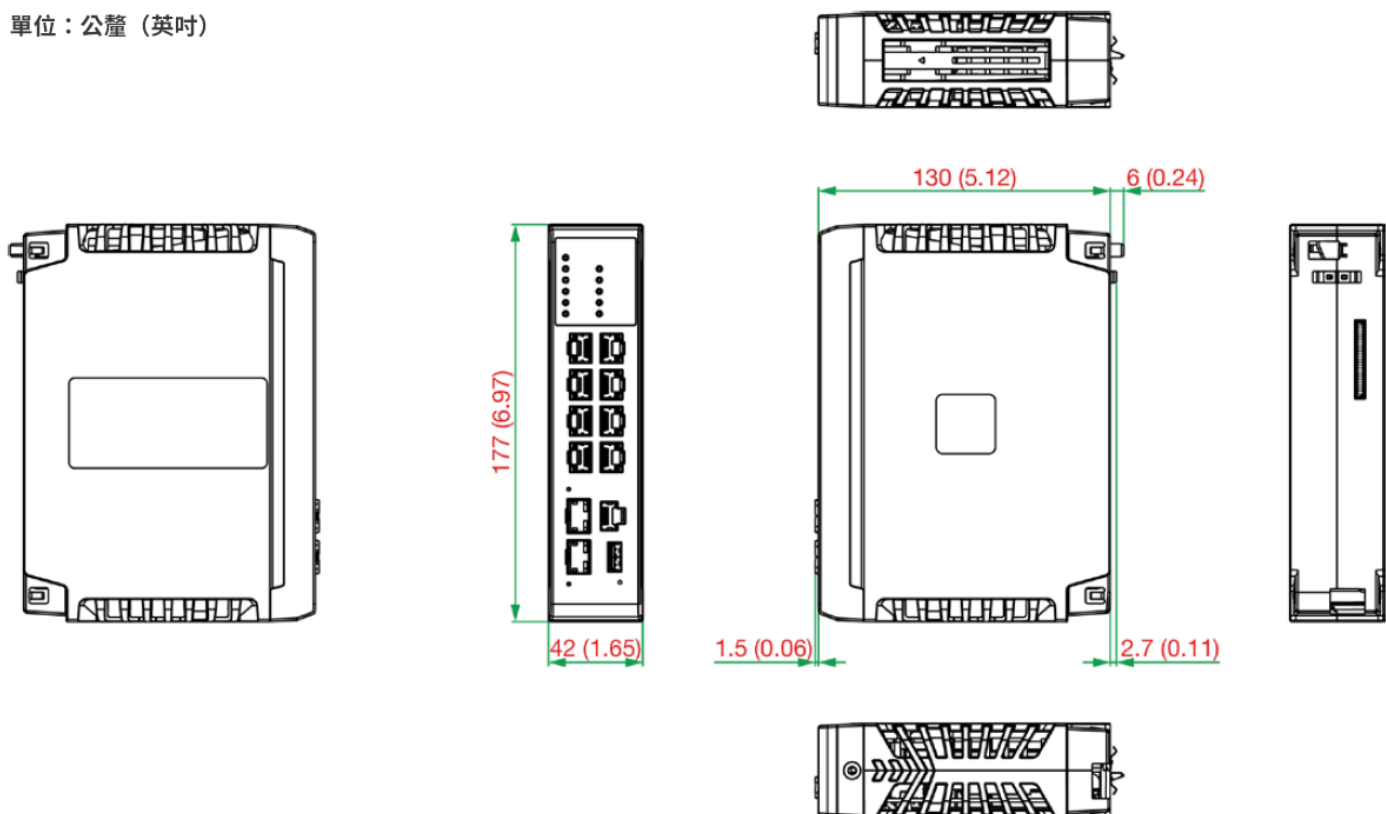

訂購資訊

Model Name	10/100/1000BaseT(X) Ports (RJ45 Connector)	100/1000BaseSFP Ports	Conformal Coating	Operating Temperature
65M-5011M-CT-T	8	2	Yes	-40 to 75°C (with SFP module installed)

配件 (選購)

Storage Kits

ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature
--------------	---

SFP Modules

SFP-1GEZXLC	SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLSXLC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-2.5GLSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature
SFP-2.5GSLHLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature
SFP-2.5GMLC-T	SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature
SFP-2.5GSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature

© Moxa Inc. 版權所有。2025 年 11 月 07 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。