

VPort P06HC-1V 系列

EN 50155，HD，立方體 IP 攝影機



特色與優點

- 1/2.7 吋逐行掃描攝影機，30 fps 時可達到 1280 x 800 之解析度
- 以 DNR 和 WDR 提供高畫質影像
- 可支援高達 3 組 H.264 或 MJPEG 獨立影像串流
- DynaStream™ 可優化網路效能
- CBR Pro™ 在有限頻寬傳輸更高畫質的影像
- 支援 DHCP options 66 和 67 自動配置
- 符合 ONVIF 中標準化和互操作性

認證



EN 50155



簡介

VPort P06HC-1V 系列立方體 IP 攝影機提供 HD (720P, 1280 x 720) 視訊影像，擁有 3 組 H.264 視訊串流，它多樣的功能及堅固性，使其適合安裝於各種不同的環境中，以達到行動 IP 視訊監控應用的需求。此外，該攝影機還符合 EN 50155 的部分規範，涵蓋操作溫度、電源輸入電壓、突波、ESD 和震動，使得 AWK-3131A-RTG 適用於多種的工業應用。該攝影機具有 -40 至 55°C 的工作溫度，堅固耐用 M12 乙太網路連接埠、PoE 電源輸入和選購鏡頭。

規格

Ethernet Interface

PoE Ports (10/100BaseT(X), M12 D-coded 4-pin female connector)

1

Ethernet Software Features

Protocols

TCP/IP, IPv4, UDP, HTTP, RTP/RTSP, ARP, UPnP, FTP, TFTP, SMTP, NTP Client, DNS, DDNS, QoS, IGMP v3, ICMP, SNMPv1/v2c/v3, DHCP Opt66/67, HTTPS

Security Functions

Password

User-level password protection

Filter

IP address

Encryption

HTTPS

Power Parameters

No. of Power Inputs

1

Source of Input Power

PoE (IEEE 802.3af)

Input Current

0.17 A @ 48 VDC

Camera Characteristics

Sensor

1/2.7-in HD progressive scan CMOS

Lens

VPort P06HC-1V28M Series: f=2.8 mm, F2.0, Diagonal 126°, Horizontal 113°, Vertical 58°
VPort P06HC-1V36M Series: f=3.6 mm, F1.6, Diagonal 99°, Horizontal 94°, Vertical 47°

	VPort P06HC-1V42M Series: f=4.2 mm, F1.8, Diagonal 87°, Horizontal 80°, Vertical 43° VPort P06HC-1V60M Series: f=6.0 mm, F1.6, Diagonal 60°, Horizontal 55°, Vertical 29° VPort P06HC-1V80M Series: f=8.0 mm, F1.6, Diagonal 45°, Horizontal 40°, Vertical 22°
Minimum Illumination	Color: 0.2 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec)
Synchronization	Internal
White Balance	ATW/AWB
Electronic Shutter	Auto (1/30 to 1/25000 sec)
S/N Ratio	Maximum 50 dB (AGC off; DNR on)
DNR (digital noise reduction)	Built-in DNR
WDR (wide dynamic range)	110 dB
Flickerless Control	Automatic, 50 Hz, 60 Hz modes
Image Rotation	Flip, Mirror, and 180° rotation
Image Setting	Manual tuning with saturation, sharpness, and contrast
AGC (auto gain control)	2X, 4X, 8X, 16X, 32X, 64X
BLC (back light compensation)	High/Medium/Low

Video Interface

Video Compression	H.264 (ISO/IEC 14496-10) or MJPEG
Video Output	via Ethernet
Video Streams	3 independent H.264 or MJPEG video streams

Video Resolution and FPS (frames per second)	NTSC		PAL	
		Size	Max. FPS	
	QCIF	176 x 112	30	176 x 144
	QVGA	320 x 240	30	320 x 240
	CIF	352 x 240	30	352 x 288
	VGA	640 x 480	30	640 x 480
	4CIF	704 x 480	30	704 x 576
	Full D1	720 x 480	30	720 x 576
	SVGA	800 x 600	30	800 x 600
	HD	1280 x 720	30	1280 x 720
	WXGA	1280 x 800	30	1280 x 800
Note: Multiple streams may not support up to 30 FPS.				

Video Viewing	DynaStream™ support for changing the video frame rate automatically CBR Pro™ for good image quality in limited bandwidth transmissions 3 privacy mask areas provided Adjustable image size and quality Timestamp and text overlay OSD (On Screen Display) position adjustable Maximum of 5 simultaneous unicast connections, 50 multicast clients
---------------	---

Camera Software Development

Video Standards	ONVIF Profile S
-----------------	-----------------

Camera Alarm Software Features

Intelligent Video	Camera tampering detection
Video Motion Detection	3 independently configurable areas
Scheduling	Daily repeat timing schedule
Imaging	JPEG snapshots for pre/trigger/post alarm images
Custom Alarms	HTTP event servers for setting customized alarm actions
FTP Messaging	Automatic transfer of stored images via FTP as event-triggered actions

Software Requirements

Memory Size	1 GB
Operating System	Windows 7 or above
Browser	Internet Explorer 9.x or above
Multimedia	DirectX 9.0C or above

Physical Characteristics

Housing	Metal
Dimensions	60 x 60 x 74.6 mm (2.36 x 2.36 x 2.94 in)
Weight	300 g (0.66 lb)
Installation	Flush mounting
Protection	-CT models: PCB conformal coating

Environmental Limits

Operating Temperature	-40 to 55°C (-40 to 131°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Ingress Protection	IEC 60529, IP30 (provided screws are used to fill the camera housing screw holes)
Altitude	2000 m

Standards and Certifications

EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Signal: 2 kV IEC 61000-4-5 Surge: Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Freefall	IEC 60068-2-31
Railway Fire Protection	EN 45545-2
Safety	UL 62368-1
Shock	IEC 60068-2-27, IEC 61373, EN 50155
Vibration	IEC 60068-2-64, IEC 61373, EN 50155
Railway	EN 50155 (complies with a portion of EN 50155 specifications)

MTBF

Time	692,847 hrs
Standards	IEC 62380

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x VPort P06HC-1V Series camera
Documentation	1 x quick installation guide 1 x warranty card

尺寸

單位：公釐

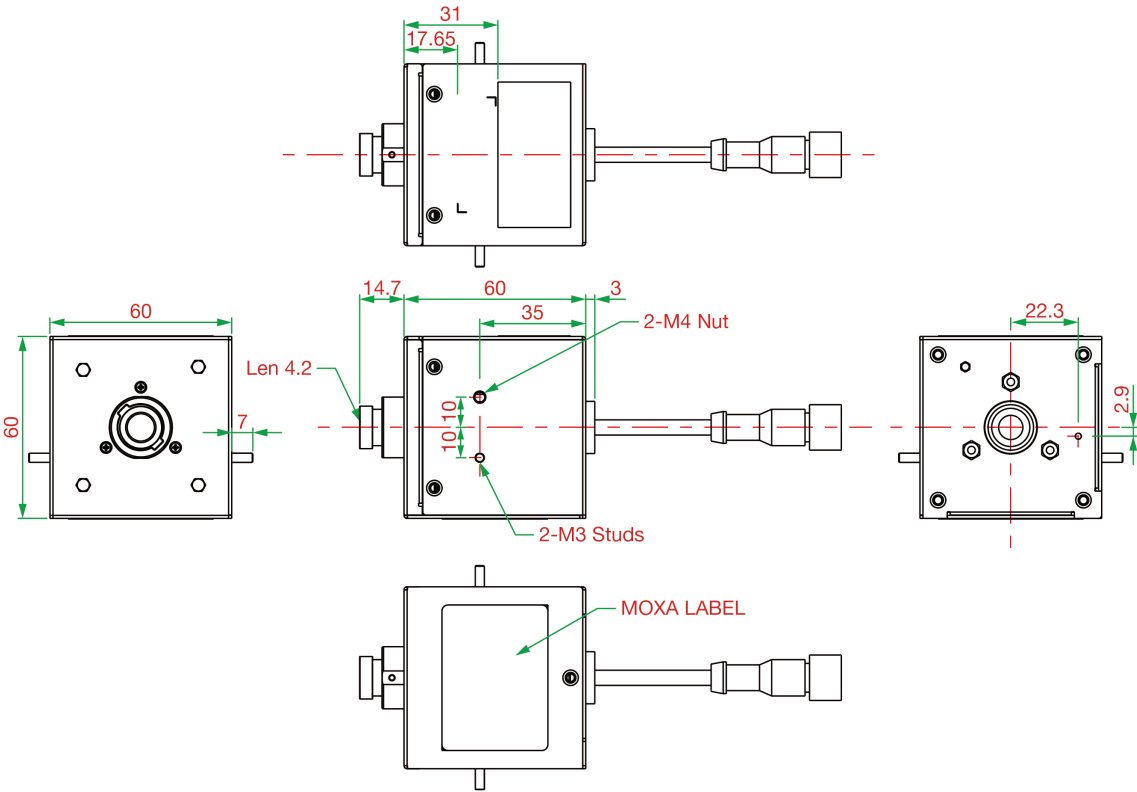

訂購資訊

Model name	Lens	Conformal coating
VPort P06HC-1V28M	2.8 mm	-
VPort P06HC-1V36M	3.6 mm	-
VPort P06HC-1V42M	4.2 mm	-
VPort P06HC-1V60M	6.0 mm	-
VPort P06HC-1V80M	8.0 mm	-
VPort P06HC-1V28M-CT	2.8 mm	P
VPort P06HC-1V36M-CT	3.6 mm	P
VPort P06HC-1V42M-CT	4.2 mm	P

Model name	Lens	Conformal coating
VPort P06HC-1V60M-CT	6.0 mm	P
VPort P06HC-1V80M-CT	8.0 mm	P

配件（選購）

Camera Mounting Kits

VP-SCO1	Side-cable-out adaptor for mounting the VPort P06-1MP-M12
---------	---

© Moxa Inc. 版權所有.2021 年 10 月 18 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。