

# MRX-Q4064 Series

48 2.5GbE- and 16 10GbE-port Layer 3 full 2.5 Gigabit modular managed Ethernet switches



reddot winner 2024



## Features and Benefits

- 16 10GbE Ethernet ports
- Up to 48 1GbE or 2.5GbE ports or SFP slots
- HAST (High-availability Static Trunk) technology supports backbone reliability
- Onboard LCM display for at-a-glance status updates supports easy on-site maintenance and operation
- Dual power modules and 6+2 fan redundancy design for non-stop network operations
- Real-time system temperature monitoring to protect network and devices

## Certifications



## Introduction

The MRX-Q4064 Series is designed to meet the high-performance, high-availability requirements of industrial video, voice, and data applications resulting from the growing convergence of information technology in industrial sites.

The modular design of the MRX-Q4064 Series supports 16 10GbE ports built-in and up to 48 2.5GbE ports via modules, ideal for building large-scale industrial network applications. 10GbE ports significantly increase the network switching bandwidth, allowing for direct connections to 10GbE-enabled servers and moving data collection and analysis closer to the application site. Additionally, support for multi-port aggregation allows for higher bandwidth backbone, while also leaving room for future network growth.

In addition to accommodating larger numbers of field devices, MRX-Q4064 Series reduces the delay of data transmission and enables the rapid transmission of large amounts of video, voice, and data on high-performance networks. This series is equipped with a redundant multi-fan cooling system and redundant isolated power supplies. It supports industrial high-efficiency Turbo Ring technology, as well as other network redundancy technologies such as ERPS (ITU-T G.8032) and RSTP/STP, which can enhance the reliability and availability of backbone networks in IT/OT convergence applications.

## Additional Features and Benefits

- Flexible bandwidth/port combinations for effective bandwidth management and maximum reliability
- Command line interface (CLI) for quick management
- Out-of-band management (OOBM) port to ensure the availability of network management when in-band services are inaccessible
- System temperature control and power consumption management for non-stop operations
- Port mirroring (N:M) technology to support security monitoring and auditing
- Optimized for large burst transmissions of large-scale video surveillance to prevent frame loss
- IEEE1588v2 PTP (Precision Time Protocol) for network time synchronization
- Supports MXconfig and MXview One for industrial network management and visualization

## Specifications

### Ethernet Interface

1000/2500/10000BaseSFP Ports	16
Out-of-band Management (OOBM)	1 x 8-pin RJ45 1GbE Ethernet port (MGMT)

Module	<p>There are 3 module slots on the switch. Users can select different types of modules to insert into the switch. The modules that can be selected include 16-port modules with 1000BaseT(X), 1000/2500BaseT(X), 1000BaseSFP, or 1000/2500BaseSFP interfaces.</p> <p>Refer to Expansion Modules in the Accessories section for a full list of supported interface modules.</p>
Standards	<p>IEEE 802.1D-2004 for Spanning Tree Protocol  IEEE 802.1p for Class of Service  IEEE 802.1Q for VLAN Tagging  IEEE 802.1s for Multiple Spanning Tree Protocol  IEEE 802.1w for Rapid Spanning Tree Protocol  IEEE 802.1X for Authentication  IEEE 802.3ab for 1000BaseT(X)  IEEE 802.3ad for Port Trunk with LACP  IEEE 802.1ad for Q-in-Q  IEEE 802.3x for Flow Control  IEEE 802.3z for 1000BaseSX/LX/LHX/ZX  IEEE 802.3bz for 2.5GBaseX  IEEE 802.3ae for 10 Gigabit Ethernet  IEEE 802.3az for Energy-Efficient Ethernet  ITU-T G.8032 Ethernet Ring Protection Switching</p>

### Ethernet Software Features

Management	<p>ARP  Back Pressure Flow Control  DHCP Client  Fiber check  Flow control  HTTP  HTTPS  IPv4  Linkup Delay  LLDP  Port Mirroring (SPAN, RSPAN)  Private MIB  RARP  RMON  SFTP  SMTP  SNMP Inform  SNMP Trap  SNMPv1/v2c/v3  Telnet  TFTP  Syslog</p>
Filter	<p>802.1Q  GARP  GMRP  GVRP  IGMP Querier  IGMP Snooping v1/v2/v3  Q-in-Q</p>
Redundancy Protocols	<p>ERPS v2  Link Aggregation  MRP  MRP Interconnection  MSTP  Multiple Dual-Homing  Multiple Network Coupling  Network Loop Protection  Ring Coupling  RSTP  STP  Tracking  Turbo Chain  Turbo Ring v2</p>
Routing Redundancy	<p>VRRP</p>

Security	<ul style="list-style-type: none"> <li>Access control list</li> <li>Broadcast storm protection</li> <li>DHCP Snooping</li> <li>Dynamic ARP Inspection</li> <li>HTTPS/SSL</li> <li>IP Source Guard</li> <li>Login and password policy</li> <li>MAC authentication bypass</li> <li>RADIUS</li> <li>Rate Limit</li> <li>Secure Boot</li> <li>SSH</li> <li>Static port lock</li> <li>Sticky MAC</li> <li>TACACS+</li> <li>Trust access control</li> </ul>
Time Management	<ul style="list-style-type: none"> <li>SNTP</li> <li>IEEE 1588v2 PTP (hardware-based)</li> <li>NTP Server/Client</li> <li>NTP Authentication</li> </ul>
Protocols	<ul style="list-style-type: none"> <li>802.1X</li> <li>ARP</li> <li>DHCP Client</li> <li>DNS</li> <li>HTTP</li> <li>HTTPS</li> <li>ICMP</li> <li>IPv4</li> <li>NTP Client</li> <li>QoS</li> <li>RARP</li> <li>RMON</li> <li>SMTP</li> <li>SNMPv1/v2c/v3</li> <li>Syslog</li> <li>TCP/IP</li> <li>Telnet</li> <li>TFTP</li> <li>UDP</li> <li>VLAN Assignment</li> </ul>
Industrial Protocols	<ul style="list-style-type: none"> <li>EtherNet/IP</li> <li>Modbus TCP</li> <li>PROFINET</li> </ul>
Unicast Routing	<ul style="list-style-type: none"> <li>OSPF</li> <li>Static Route</li> </ul>
MIB	<ul style="list-style-type: none"> <li>P-BRIDGE MIB</li> <li>Q-BRIDGE-MIB</li> <li>IEEE8021-SPANNING-TREE-MIB</li> <li>IEEE8021-PAE-MIB</li> <li>IEEE8023-LAG-MIB</li> <li>LLDP-EXT-DOT1-MIB</li> <li>LLDP-EXT-DOT3-MIB</li> <li>SNMPv2-MIB</li> <li>RMON MIB Groups 1, 2, 3, 9</li> </ul>

#### Switch Properties

MAC Table Size	32 K
Max. No. of VLANs	512
IGMP Groups	2048
Jumbo Frame Size	9.6 KB
Packet Buffer Size	6 MB

Priority Queues	8
VLAN ID Range	VID 1 to 4094
<b>USB Interface</b>	
Storage Port	USB Type A
<b>MicroSD Interface</b>	
Storage Port	microSD card
<b>Serial Interface</b>	
Console Port	RS-232 (RJ45)
<b>Input/Output Interface</b>	
Alarm Contact Channels	1 relay output with current carrying capacity of 2 A @ 30 VDC
<b>Power Parameters</b>	
Input Voltage	100-240 VAC, 50-60 Hz or 230-240 VDC (for each power supply)
Operating Voltage	90-264 VAC, 47-63 Hz or 180-300 VDC (for each power supply)
Overload Current Protection	Supported
Reverse Polarity Protection	Supported
Input Current	Max. 2.703 A @ 110 VAC Max. 1.339 A @ 220 VAC Max. 1.615 A @ 180 VDC Max. 0.948 A @ 300 VDC
Power Consumption (Max.)	Max. 297 W @ 110 VAC Max. 287.3 W @ 220 VAC Max. 290.3 W @ 180 VDC Max. 284.3 W @ 300 VDC  Note: These are the maximum power consumption ratings for the device with the maximum number of modules installed.
Power Module	2 x slots (2 x PWR-300-HVA-IF power modules included)
<b>Physical Characteristics</b>	
IP Rating	IP30
Dimensions	440 x 88 x 420 mm (17.32 x 3.46 x 16.54 in)
Weight	12 kg (26 lb)
Fan Module	8 x slots (8 x XM-4000-FAN-R preinstalled)
Installation	Rack mounting
Interactive Interface	Onboard LCM display Push buttons for configuration
<b>Environmental Limits</b>	
Operating Temperature	-10 to 60°C (-14 to 140°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

Safety	UL 62368-1 UL 61010-2-201 IEC 62368-1
EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 Voltage Dips & Interruptions
Railway	EN 50121-4
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Package Drop Test	ISTA 1A
Package Vibration Test	ISTA 1A

## MTBF

Time	1,337,959 hrs
Standards	Telcordia (Bellcore), GB

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x MRX-Q4064-L3-16XGS Series switch (eight XM-4000-FAN-R fan modules preinstalled)
Power Supply	2 x PWR-300-HVA-IF power modules
Installation Kit	2 x rack-mounting ear 2 x plastic IP30 dust cover for PWR power modules 8 x round stickers for module screws
Documentation	1 x quick installation guide 1 x warranty card
Note	This product requires additional modules (sold separately) and IEC 60320 C15 power cords to function.

## Dimensions

Unit = mm (inch)

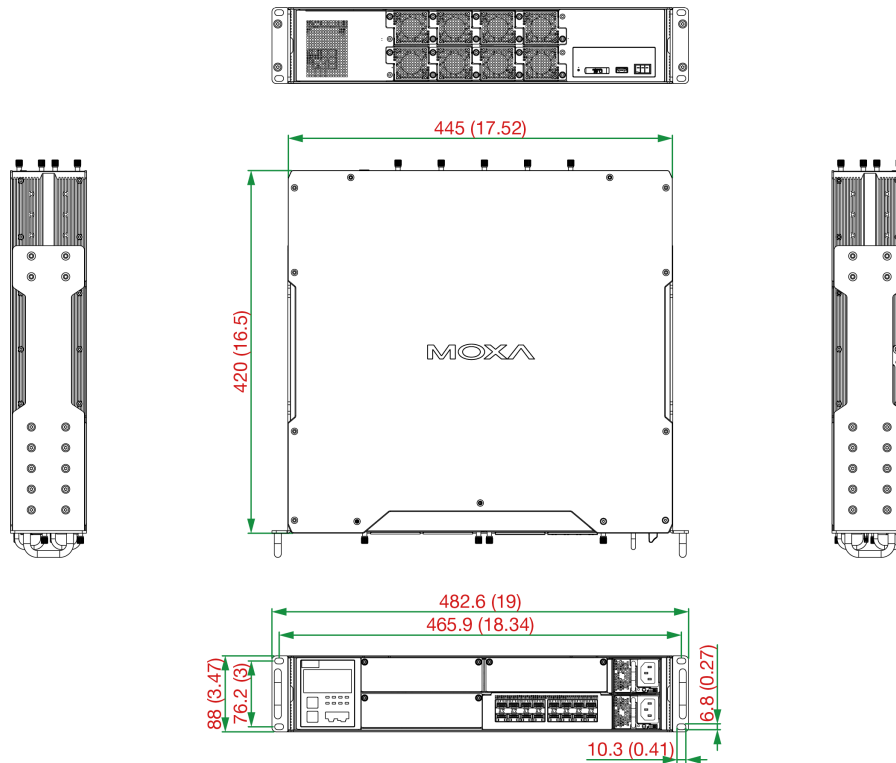

## Ordering Information

Model Name	Max. No. of Ports	10GbE SFP+ Slots	1000/2500Base SFP Slots	1000/2500BaseT(X) Ports (RJ-45)	L3 Functionality	Operating Temp.
MRX-Q4064-L3-16XGS	64	16	Up to 48	Up to 48	✓	-10 to 60°C

## Accessories (sold separately)

### Expansion Modules

XM-4000-16GTX	Gigabit Ethernet module with 16 1000BaseT(X) ports
XM-4000-16GSFP	Gigabit Ethernet module with 16 1000BaseSFP ports
XM-4000-16QGTX	2.5 Gigabit Ethernet module with 16 1000/2500BaseT(X) ports
XM-4000-16QGSFP	2.5 Gigabit Ethernet module with 16 1000/2500BaseSFP ports

### Power Modules

PWR-300-HVA-IF	Isolated power supply module (110/220 VAC/VDC) with system power input, AC power inlet, intake fan
----------------	--

### Fan Modules

XM-4000-FAN-R	Exhaust fan module for MRX switches
---------------	-------------------------------------

### SFP Modules

SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature

SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GSXLC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GLSXLC	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLXLC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHXL	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GZXLC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GEZXL	SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXL-120	SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GLSXLC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXL-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature
SFP-2.5GMLC-T	SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature
SFP-2.5GSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature
SFP-2.5GSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature
SFP-2.5GSLHLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature
SFP-10GSRLC-T	SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature

SFP-10GLRLC-T	SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-10GERLC-T	SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-10GZRLC-T	SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature

#### Cables

CN20070	10-pin RJ45 to DB9 female serial cable
PWC-C15US-3B-183	C15 power cord with US plug, 1.83 m
PWC-C15EU-3B-183	C15 power cord with EU plug, 1.83 m

#### Software

LIC-MXviewOne-NEW-XN-SR	MXview One node license with customizable node quantity (minimum 1 node)
-------------------------	--

#### Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature
ABC-03-microSD-T	MicroSD-based configuration backup and restoration tool, firmware upgrades, and log file storage tool for managed Ethernet switches and WLAN products, -40 to 85°C operating temperature

© Moxa Inc. All rights reserved. Updated Mar 02, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.