

VPort 07-3シリーズ

EN 50155 3メガピクセルH.265コンパクトIPカメラ



機能と特長

- 1/3”プログレッシブスキャンカメラ、最大2048 x 1536解像度（最大20 fps）、1920 x 1080（最大30 fps）
- DNR（デジタルノイズリダクション）およびWDR（ワイドダイナミックレンジ）による高品質なビデオ画像
- 最大4つの独立したH.265/H.264または MJPEG ビデオストリームに対応
- DynaStream™により最適化されたネットワーク効率を実現
- CBR Pro™により制限された帯域幅でも高品質の画像を伝送
- 1つの内蔵オーディオ入力またはマイク
- ONVIF対応により標準化と相互運用性を実現

認証



製品紹介

VPort 07-3カメラは、モバイルビデオ監視アプリケーション向けに設計されたコンパクトな3メガピクセル（2048 x 1536）、H.265/H.264/MJPEG対応のドーム型IPカメラです。これらのカメラはEN 50155の必須項目であるEN 62262 IK8に準拠しており、-40 ~ 55°C または -40 ~ 70°C の動作温度範囲をサポートします。堅牢なM12イーサネットポート、ONVIFプロファイルS、T、M規格、内蔵オーディオラインポートまたはマイク、PoEまたは24 VDC電源入力、IP66保護等級、および異なる固定焦点距離レンズの変更オプションを備えたVPort 07-3カメラは、過酷な環境条件でも確実に動作し、さまざまなモバイルビデオ監視アプリケーションに適しています。

仕様

Input/Output Interface

Digital Input Channels	1
Digital Inputs	+13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA
Connector	VPort P07-3 Series: 5-pin male M12 connector with 20 cm cable VPort 07-3 Series: DB9 male

Ethernet Interface

PoE Ports (10/100BaseT(X), M12 D-coded 4-pin female connector)	VPort P07-3 Series: 1
10/100BaseT(X) Ports (M12 D-coded 4-pin female connector)	VPort 07-3 Series: 1

1. EN 50155 規格で定義されているように、鉄道車両アプリケーションに適しています。
詳細については、www.moxa.com/doc/specs/EN_50155_Compliance.pdf を参照してください。

Ethernet Software Features

Protocols	TCP/IP IPv4/IPv6 UDP HTTP RTP/RTSP ARP UPnP FTP TFTP SFTP NTP Client DNS QoS IGMP v3 ICMP SNMPv1/v2c/v3 DHCP Opt66/67 HTTPS
-----------	--

Security Functions

Password	User-level password protection
Filter	IP address
System Boot	Secure Boot
Encryption	HTTPS SSH

Power Parameters

No. of Power Inputs	1
Source of Input Power	VPort P07-3 Series: PoE (IEEE 802.3af)
Input Voltage	VPort 07-3 Series: 12/24 VDC
Input Current	VPort P07-3: 48 VDC @ 0.137 A VPort 07-3: 24V VDC @ 0.27 A; 12 VDC @ 0.59 A
Power Connector	VPort 07-3 Series: DB9 connector

Camera Characteristics

Sensor	1/3-in 3-megapixel progressive scan CMOS
Lens	VPort 07/P07-3x24M Series: f=2.4 mm, F2.0, Diagonal 139°, Horizontal 110°, Vertical 81° VPort 07/P07-3x36M Series: f=3.6 mm, F1.6, Diagonal 97°, Horizontal 75°, Vertical 55° VPort 07/P07-3x42M Series: f=4.2 mm, F1.6, Diagonal 82°, Horizontal 64°, Vertical 47° VPort 07/P07-3x60M Series: f=6.0 mm, F1.8, Diagonal 57°, Horizontal 43°, Vertical 32° VPort 07/P07-3x80M Series: f=8.0 mm, F1.6, Diagonal 41°, Horizontal 33°, Vertical 24°
Minimum Illumination	Color: 0.2 lux, at F1.2 (Gain High, 50 IRE, 1/30 sec)
Synchronization	Internal
White Balance	ATW/AWB
Electronic Shutter	Auto, Fixed (1/30 to 1/25000 sec)
S/N Ratio	Maximum 50 dB (AGC off; DNR on)
DNR (digital noise reduction)	Built-in 2D/3D DNR
WDR (wide dynamic range)	100 dB
AGC (auto gain control)	2X, 4X, 8X, 16X

Flickerless Control	Automatic, 50 Hz, 60 Hz modes
Image Rotation	Flip, Mirror, 90°, 180°, 270° rotation
Image Setting	Manual tuning with saturation, sharpness, and contrast
Camera Angle	Pan: $\pm 15^\circ$, Tilt: 20° to 90° for 2.4mm lens, 0° to 90° for other lens (controlled manually)

Video Interface

Video Compression	H.265 (MPEG-H part 2/HEVC), H.264 (ISO/IEC 14496-10/AVC), or MJPEG				
Video Output	via Ethernet				
Video Streams	4 independent video streams				
Video Resolution and FPS (frames per second)		NTSC		PAL	
		Size	Max. FPS	Size	Max. FPS
	CIF	352 x 240	30	352 x 288	25
	VGA	640 x 480	30	640 x 480	25
	4CIF	704 x 480	30	704 x 576	25
	Full D1	720 x 480	30	720 x 576	25
	SVGA	800 x 600	30	800 x 600	25
	HD	1280 x 720	30	1280 x 720	25
	WXGA	1280 x 800	30	1280 x 800	25
	Full HD	1920 x 1080	30	1920 x 1080	30
	QXGA	2048 x 1536	20	2048 x 1536	20
Note: Once the 3-megapixels resolution is configured in one stream, all video streams will be only up to maximum 20 FPS at all resolutions due to sensor limitation.					
Video Viewing	DynaStream™ support for changing the video frame rate automatically CBR Pro™ for good image quality in limited bandwidth transmissions 3 privacy mask areas provided Adjustable image size and quality Timestamp and text overlay OSD (On Screen Display) position adjustable LDC (Lens distortion correction) for less image warp Maximum of 10 simultaneous unicast connections, 50 multicast clients				

Audio Interface

Audio Format	Mono, PCM (G.711) AAC
Audio Inputs	VPort 07/P07-3MxxM Series: 1 x built-in microphone VPort 07-3LxxM Series: 1 x line-in, with DB9 connector VPort P07-3LxxM Series: 1 x line-in, with M12 connector

Camera Software Development

Video Standards	ONVIF Profile S, T, M
-----------------	-----------------------

Camera Alarm Software Features

Intelligent Video	Camera tampering detection
Video Motion Detection	3 independently configurable areas
Imaging	JPEG snapshots for pre/trigger/post alarm images
Custom Alarms	HTTP event servers for setting customized alarm actions

FTP Messaging	Automatic transfer of stored images via FTP as event-triggered actions
Pre-Alarm Buffer	50 MB video buffer for JPEG snapshot images
Software Requirements	
Memory Size	8 GB
Operating System	Windows 10 or above
Browser	Internet Explorer 11 or above Chrome: Version 118 or above Microsoft Edge: Version 118 or above
Multimedia	DirectX 12 or above
Physical Characteristics	
Housing	IP66 rain and dust protection Metal housing, PC dome cover IK8 vandal resistant protection Built-in heater for dome cover demist
Dimensions	110 x 115.5 x 61.8 mm (4.33 x 4.53 x 2.43 in)
Weight	620 g (1.37 lb)
Installation	Panel mounting
Protection	PCB conformal coating is optional and provided on request. If conformal coating is required, please contact Moxa.
Environmental Limits	
Operating Temperature	Standard Models: -40 to 55°C (-40 to 131°F) Wide Temp. Models: -40 to 70°C (-40 to 158°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Ingress Protection	IEC 60529, IP66
Vandal Resistance	EN 62262, IK8
Altitude	2000 m Note: Please contact Moxa if you require products guaranteed to function properly at higher altitudes.
Standards and Certifications	
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Freefall	IEC 60068-2-31
Railway Fire Protection	EN 45545-2
Safety	UL 62368-1
Shock	IEC 60068-2-27, IEC 61373, EN 50155

Vibration	IEC 60068-2-64, IEC 61373, EN 50155
Railway	EN 50155 (complies with a portion of EN 50155 specifications)

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x VPort 07-3 Series camera
Installation Kit	1 x sticker 1 x L-type Torx screwdriver 4 x indented hexagonal head tapping screws, nuts, gaskets, and spring washers
Documentation	1 x quick installation guide 1 x warranty card

寸法

単位: mm

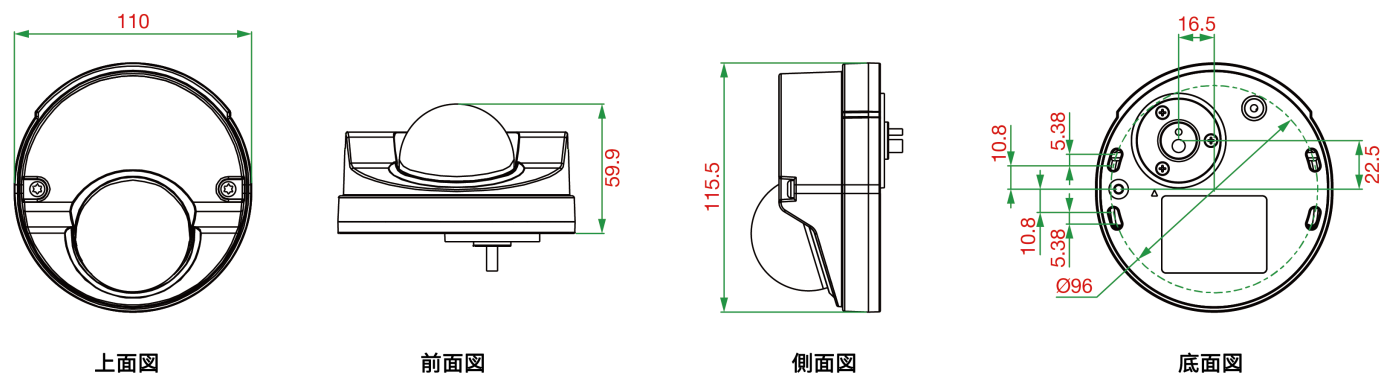

注文情報

Model Name	Lens	Audio Interface	Power Input	Operating Temp.
VPort P07-3L24M	2.4 mm	Line-in	PoE	-40 to 55°C
VPort P07-3L24M-T	2.4 mm	Line-in	PoE	-40 to 70°C
VPort P07-3M24M	2.4 mm	Microphone	PoE	-40 to 55°C
VPort P07-3M24M-T	2.4 mm	Microphone	PoE	-40 to 70°C
VPort 07-3L24M	2.4 mm	Line-in	12/24 VDC	-40 to 55°C
VPort 07-3L24M-T	2.4 mm	Line-in	12/24 VDC	-40 to 70°C
VPort 07-3M24M	2.4 mm	Microphone	12/24 VDC	-40 to 55°C
VPort 07-3M24M-T	2.4 mm	Microphone	12/24 VDC	-40 to 70°C
VPort P07-3L36M	3.6 mm	Line-in	PoE	-40 to 55°C
VPort P07-3L36M-T	3.6 mm	Line-in	PoE	-40 to 70°C
VPort P07-3M36M	3.6 mm	Microphone	PoE	-40 to 55°C
VPort P07-3M36M-T	3.6 mm	Microphone	PoE	-40 to 70°C
VPort 07-3L36M	3.6 mm	Line-in	12/24 VDC	-40 to 55°C
VPort 07-3L36M-T	3.6 mm	Line-in	12/24 VDC	-40 to 70°C
VPort 07-3M36M	3.6 mm	Microphone	12/24 VDC	-40 to 55°C

Model Name	Lens	Audio Interface	Power Input	Operating Temp.
VPort 07-3M36M-T	3.6 mm	Microphone	12/24 VDC	-40 to 70°C
VPort P07-3L42M	4.2 mm	Line-in	PoE	-40 to 55°C
VPort P07-3L42M-T	4.2 mm	Line-in	PoE	-40 to 70°C
VPort P07-3M42M	4.2 mm	Microphone	PoE	-40 to 55°C
VPort P07-3M42M-T	4.2 mm	Microphone	PoE	-40 to 70°C
VPort 07-3L42M	4.2 mm	Line-in	12/24 VDC	-40 to 55°C
VPort 07-3L42M-T	4.2 mm	Line-in	12/24 VDC	-40 to 70°C
VPort 07-3M42M	4.2 mm	Microphone	12/24 VDC	-40 to 55°C
VPort 07-3M42M-T	4.2 mm	Microphone	12/24 VDC	-40 to 70°C
VPort P07-3L60M	6.0 mm	Line-in	PoE	-40 to 55°C
VPort P07-3L60M-T	6.0 mm	Line-in	PoE	-40 to 70°C
VPort P07-3M60M	6.0 mm	Microphone	PoE	-40 to 55°C
VPort P07-3M60M-T	6.0 mm	Microphone	PoE	-40 to 70°C
VPort 07-3L60M	6.0 mm	Line-in	12/24 VDC	-40 to 55°C
VPort 07-3L60M-T	6.0 mm	Line-in	12/24 VDC	-40 to 70°C
VPort 07-3M60M	6.0 mm	Microphone	12/24 VDC	-40 to 55°C
VPort 07-3M60M-T	6.0 mm	Microphone	12/24 VDC	-40 to 70°C
VPort P07-3L80M	8.0 mm	Line-in	PoE	-40 to 55°C
VPort P07-3L80M-T	8.0 mm	Line-in	PoE	-40 to 70°C
VPort P07-3M80M	8.0 mm	Microphone	PoE	-40 to 55°C
VPort P07-3M80M-T	8.0 mm	Microphone	PoE	-40 to 70°C
VPort 07-3L80M	8.0 mm	Line-in	12/24 VDC	-40 to 55°C
VPort 07-3L80M-T	8.0 mm	Line-in	12/24 VDC	-40 to 70°C
VPort 07-3M80M	8.0 mm	Microphone	12/24 VDC	-40 to 55°C
VPort 07-3M80M-T	8.0 mm	Microphone	12/24 VDC	-40 to 70°C

© Moxa Inc. All rights reserved.2025年1月18日更新。

Moxa Inc.の明白な許可を面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。