

# Moxa Managed Two-wire Ethernet Switch User Manual

---

**Version 1.0, March 2026**

[www.moxa.com/products](http://www.moxa.com/products)

**Models covered by this user manual:**

TWS-3010-SPE-8PB-2GC-T, TWS-3010-APL-8PS-2GC-T



© 2026 Moxa Inc. All rights reserved.

# Moxa Managed Two-wire Ethernet Switch User Manual

The software described in this manual is furnished under a license agreement and may be used only in accordance with the terms of that agreement.

## Copyright Notice

© 2026 Moxa Inc. All rights reserved.

## Trademarks

The MOXA logo is a registered trademark of Moxa Inc.  
All other trademarks or registered marks in this manual belong to their respective manufacturers.

## Disclaimer

- Information in this document is subject to change without notice and does not represent a commitment on the part of Moxa.
- Moxa provides this document as is, without warranty of any kind, either expressed or implied, including, but not limited to, its particular purpose. Moxa reserves the right to make improvements and/or changes to this manual, or to the products and/or the programs described in this manual, at any time.
- Information provided in this manual is intended to be accurate and reliable. However, Moxa assumes no responsibility for its use, or for any infringements on the rights of third parties that may result from its use.
- This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

## Technical Support Contact Information

[www.moxa.com/support](http://www.moxa.com/support)

# Table of Contents

<b>1. About This Manual</b> .....	<b>5</b>
<b>2. Getting Started</b> .....	<b>6</b>
RS-232 Console Configuration (115200, None, 8, 1, VT100) .....	6
Configuration by Command Line Interface (CLI) .....	9
Configuration by Web Console .....	11
Disabling Telnet and Browser Access .....	12
<b>3. Featured Functions</b> .....	<b>13</b>
Home .....	13
System Settings .....	14
System Information .....	14
User Account .....	15
Password Login Policy .....	17
Network .....	18
Date and Time .....	20
Warning Notification .....	23
MAC Address Table .....	29
System Files .....	30
Restart .....	34
Factory Default .....	34
PoDL (PoDL Supported Models Only) .....	34
PoDL Settings .....	35
PoDL System Configuration .....	36
PoDL Timetabling .....	38
PoDL Warning Event Settings .....	39
PoDL Port Status .....	40
APL Power Supply (Ethernet-APL supported Models Only) .....	41
APL Power Supply Settings .....	42
APL Power Supply Warning Event Settings .....	44
APL Power Supply Status .....	45
VLAN .....	46
The Virtual LAN (VLAN) Concept .....	46
Sample Applications of VLANs Using Moxa Switches .....	48
Configuring a Virtual LAN .....	49
VLAN Name Setting .....	51
VLAN Table .....	52
Port .....	52
Port Settings .....	52
Port Status .....	54
Link Aggregation .....	54
Link-Swap Fast Recovery .....	56
Multicast .....	56
The Concept of Multicast Filtering .....	56
IGMP Snooping .....	59
IGMP Snooping Setting .....	59
IGMP Group Status .....	60
Static Multicast Address .....	61
GMRP .....	62
QoS .....	62
The Traffic Prioritization Concept .....	62
Configuring Traffic Prioritization .....	65
CoS Classification .....	65
Priority Mapping .....	66
DSCP Mapping .....	67
Rate Limiting .....	67
Security .....	69
Management Interface .....	69
Trusted Access .....	71
SSL Certificate Management .....	72

SSH Key Management.....	72
Authentication .....	73
Port Security.....	77
Port Access Control Table .....	80
Loop Protection .....	80
DHCP .....	81
IP-Port Binding.....	81
DHCP Relay Agent .....	82
SNMP .....	84
SNMP Read/Write Settings.....	85
Trap Settings .....	86
Industrial Protocols .....	90
Diagnostics .....	90
LLDP.....	91
Ping .....	92
Port Mirroring .....	92
Signal Quality.....	93
Monitoring .....	93
CPU/Memory Utilization.....	93
Statistics .....	94
Fiber Digital Diagnostics Monitoring (SFP DDM and Fiber Check) .....	95
Event Log.....	99
Session Monitor.....	100
Tracking .....	100
Interface Tracking .....	101
Ping Tracking .....	102
Logic Tracking.....	103
Tracking Table .....	104
<b>A. MIB Groups.....</b>	<b>105</b>

# 1. About This Manual

---

Thank you for purchasing a Moxa managed Ethernet switch. Read this user's manual to learn how to connect your Moxa switch to Ethernet-enabled devices used for industrial applications.

A synopsis of chapters 2 and 3 are given below:

- **Chapter 2: Getting Started**  
In this chapter, we explain the initial installation process for a Moxa switch. Moxa switches provide three interfaces to access the configuration settings: RS-232 console interface, command line interface, and web console interface.
- **Chapter 3: Featured Functions**  
In this chapter, we explain how to access a Moxa switch's various configuration, monitoring, and management functions. The functions can be accessed by RS-232 console, Telnet console, and web console (web browser). We describe how to configure the switch functions via web console, which provides the most user-friendly way to configure a Moxa switch.

## 2. Getting Started

In this chapter, we explain how to install a Moxa switch for the first time. There are three ways to access the Moxa switch's configuration settings: RS-232 console, command line interface, or web-based interface. If you do not know the Moxa switch's IP address, you can open the RS-232 console by connecting the Moxa switch to a PC's USB port with an RS-232 serial cable with an RJ45 interface. You can open the Telnet or web-based console over an Ethernet LAN or over the Internet.

### RS-232 Console Configuration (115200, None, 8, 1, VT100)



#### NOTE

A Moxa switch allows multi-session connections (up to 6) by connecting to the web console and another console (serial or Telnet) at the same time.




#### NOTE

We recommend using **PComm Terminal Emulator** when opening the RS-232 console. This software can be downloaded free of charge from the Moxa website.


Before running PComm Terminal Emulator, first install the USB console driver on your PC and then connect the Moxa switch's RS-232 console port to your PC's USB port with an RS-232 serial cable with an RJ45 interface.

After installing PComm Terminal Emulator, open the Moxa switch's RS-232 console as follows:


1. From the Windows desktop, click **Start > Moxa > PComm Lite Ver1.6 > Terminal Emulator**.

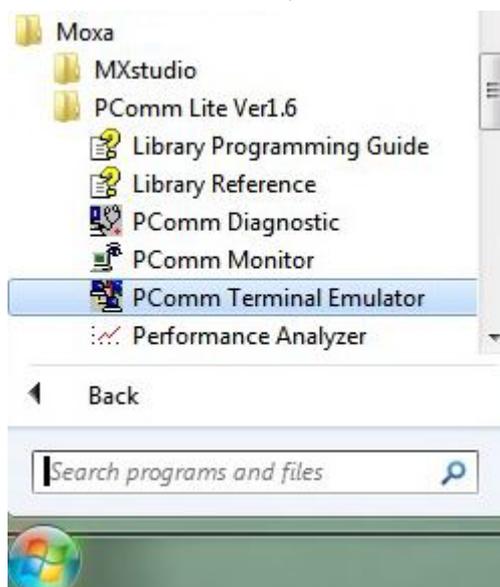


2. Select **Open** under the **Port Manager** menu to open a new connection.

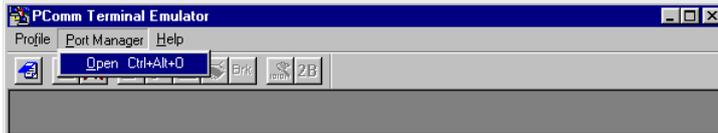


3. The **Property** window should open. On the **Communication Parameter** tab for **Ports**, select the COM port that is being used for the console connection. Set the other fields as follows: **115200** for **Baud Rate**, **8** for **Data Bits**, **None** for **Parity**, and **1** for **Stop Bits**.

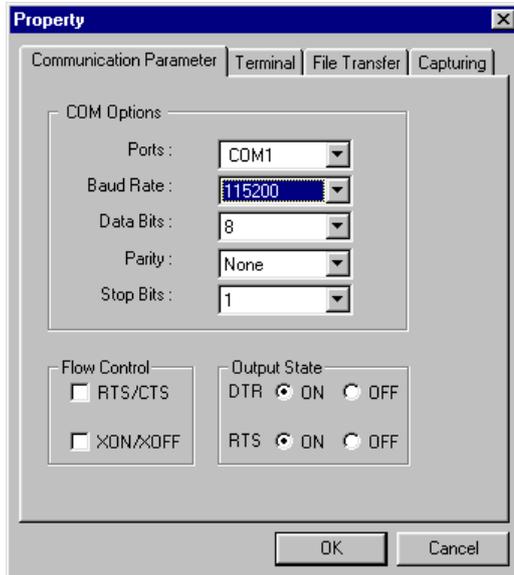

4. On the **Terminal** tab, select **VT100** for **Terminal Type**, and then click **OK** to continue.

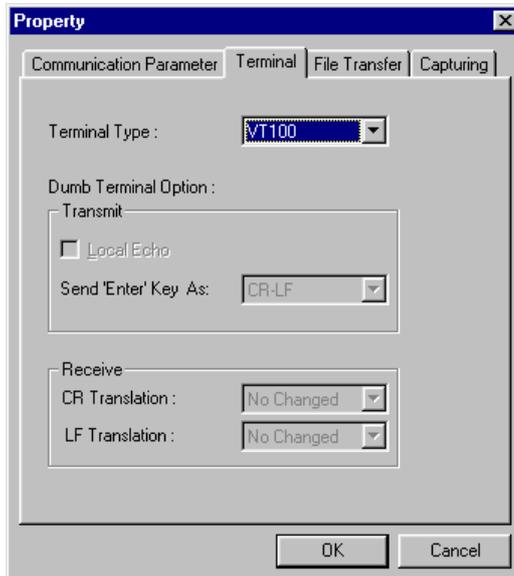

5. In the terminal window, the Moxa switch will prompt you to select a terminal type. Enter **1** to select **ansi/vt100** and then press **Enter**.



6. The RS-232 console will prompt you to log in. Press **Enter** and select **admin** or **user**. Use the down arrow key on your keyboard to select the **Password** field and enter a password if desired. This password will be required to access any of the consoles (web, serial, Telnet).

```

Model :          EDS-510E-3GTXSFP
Name :
Location :       Switch Location

Firmware Version : V3.3 build 13061918
Serial No :       03131
IP :              192.168.127.124
MAC Address :     00-90-E8-22-52-25

+-----+
| Account : admin |
| Password :      |
+-----+

```



## NOTE

By default, the password assigned to the Moxa switch is **moxa**. Be sure to change the default password after you first log in to help keep your system secure.

7. The **Main Menu** of the Moxa switch's RS-232 console should appear. (In PComm Terminal Emulator, you can adjust the font by selecting **Font...** from the **Edit** menu.)

```

EDS-510E series V3.3 build 13061918
-----
1. Basic Settings      - Basic settings for network and system parameter.
2. Port Trunking       - Allows multiple ports to be aggregated as a link.
3. SNMP                - The settings for SNMP.
4. Redundant Protocol  - Establish Ethernet communication redundant path.
5. QoS                 - Prioritize Ethernet traffic to help determinism.
6. VLAN                - Set up a VLAN by IEEE802.1Q VLAN or Port-based VLAN.
7. Multicast           - Enable the multicast filtering capability.
8. Rate Limiting       - Restrict unpredictable network traffic.
9. Security            - Port access control by IEEE802.1X or Static Port Lock.
a. Warning Notification - Warning email and/or relay output by events.
b. Link-Swap Recovery  - Fast recovery after moving devices to different ports.
c. DHCP                - Assign IP addresses to connected devices.
d. Diagnostics         - Ping command and the settings for Mirror port, LLDP.
e. Monitoring          - Monitor a port and network status.
f. MAC Address Table   - The complete table of Ethernet MAC Address List.
g. System log          - The settings for Syslog and Event log.
h. Exit                - Exit
- Use the up/down arrow keys to select a category,
  and then press Enter to select. -

```

8. Use the following keys on your keyboard to navigate the Moxa switch's RS-232 console:

Key	Function
Up, down, right, left arrow keys, Tab	Move the onscreen cursor
Enter	Display and select options
Space	Toggle options
Esc	Previous menu

# Configuration by Command Line Interface (CLI)

Opening the Moxa switch's Telnet or web console over a network requires that the PC host and Moxa switch are on the same logical subnet. You may need to adjust your PC host's IP address and subnet mask. By default, the Moxa switch's IP address is 192.168.127.253 and the Moxa switch's subnet mask is 255.255.255.0 (referred to as a Class B network). Your PC's IP address must be set to 192.168.xxx.xxx if the subnet mask is 255.255.0.0, or to 192.168.127.xxx if the subnet mask is 255.255.255.0.



## NOTE

To connect to the Moxa switch's Telnet or web console, your PC host and the Moxa switch must be on the same logical subnet.



## NOTE

When connecting to the Moxa switch's Telnet or web console, first connect one of the Moxa switch's Ethernet ports to your Ethernet LAN, or directly to your PC's Ethernet port. You may use either a straight-through or cross-over Ethernet cable.




## NOTE

The Moxa switch's default IP address is 192.168.127.253.

After making sure that the Moxa switch is connected to the same LAN and logical subnet as your PC, open the Moxa switch's Telnet console as follows:

1. Click **Start > Run** from the Windows Start menu and then Telnet to the Moxa switch's IP address from the Windows **Run** window. You may also issue the Telnet command from a DOS prompt.

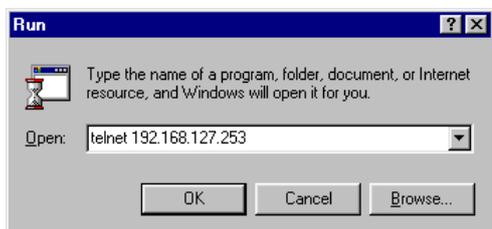

2. In the terminal window, the Telnet console will prompt you to select a terminal type. Type **1** to choose **ansi/vt100**, and then press **Enter**.

```
MOXA EtherDevice Switch  EDS-510E-3GTXSFP
Console terminal type (1: ansi/vt100, 2: vt52) : 1
```

- The Telnet console will prompt you to log in. Press **Enter** and then select **admin** or **user**. Use the down arrow key on your keyboard to select the **Password** field and enter a password if desired. This password will be required to access any of the consoles (web, serial, Telnet). If you do not wish to create a password, leave the **Password** field blank and press **Enter**.

```

Model :                EDS-510E-3GTXSFP
Name :
Location :            Switch Location

Firmware Version :    V3.3 build 13061918
Serial No :           03131
IP :                  192.168.127.124
MAC Address :         00-90-E8-22-52-25

+-----+
| Account : admin    |
| Password :         |
+-----+

```


- The **Main Menu** of the Moxa switch's Telnet console should appear.

```

EDS-510E series V3.3 build 13061918
-----
1. Basic Settings      - Basic settings for network and system parameter.
2. Port Trunking       - Allows multiple ports to be aggregated as a link.
3. SNMP               - The settings for SNMP.
4. Redundant Protocol  - Establish Ethernet communication redundant path.
5. QoS                 - Prioritize Ethernet traffic to help determinism.
6. VLAN               - Set up a VLAN by IEEE802.1Q VLAN or Port-based VLAN.
7. Multicast           - Enable the multicast filtering capability.
8. Rate Limiting      - Restrict unpredictable network traffic.
9. Security            - Port access control by IEEE802.1X or Static Port Lock.
a. Warning Notification - Warning email and/or relay output by events.
b. Link-Swap Recovery  - Fast recovery after moving devices to different ports.
c. DHCP               - Assign IP addresses to connected devices.
d. Diagnostics        - Ping command and the settings for Mirror port, LLDP.
e. Monitoring         - Monitor a port and network status.
f. MAC Address Table  - The complete table of Ethernet MAC Address List.
g. System log         - The settings for Syslog and Event log.
h. Exit               - Exit
                    - Use the up/down arrow keys to select a category,
                    and then press Enter to select. -

```

- In the terminal window, select **Preferences...** from the **Terminal** menu on the menu bar.
- The Terminal Preferences window should appear. Make sure that **VT100 Arrows** is checked.

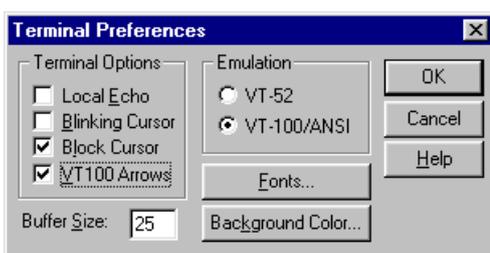

- Use the following keys on your keyboard to navigate the Moxa switch's Telnet console:

Key	Function
Up, down, right, left arrow keys, Tab	Move the onscreen cursor
Enter	Display and select options
Space	Toggle options
Esc	Previous menu



## NOTE

The Telnet console looks and operates in precisely the same manner as the RS-232 console.

# Configuration by Web Console

The Moxa switch's web console is a convenient platform for modifying the configuration and accessing the built-in monitoring and network management functions. You can open the Moxa switch's web console using a standard web browser, such as Internet Explorer.



## NOTE

When connecting to the Moxa switch's Telnet or web console, your PC host and the Moxa switch must be on the same logical subnet.



## NOTE

If the Moxa switch is configured for other VLAN settings, you must make sure your PC host is on the management VLAN.



## NOTE

When connecting to the Moxa switch's Telnet or web console, first connect one of the Moxa switch's Ethernet ports to your Ethernet LAN, or directly to your PC's Ethernet port. You may use either a straight-through or cross-over Ethernet cable.




## NOTE


The Moxa switch's default IP address is 192.168.127.253.

After making sure that the Moxa switch is connected to the same LAN and logical subnet as your PC, open the Moxa switch's web console as follows:

1. Connect your web browser to the Moxa switch's IP address by entering it in the **Address** or **URL** field.

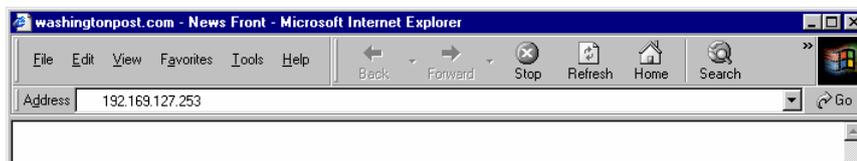

2. The Moxa switch's web console will open, and you will be prompted to log in. Select the login account (admin or user) and enter the **Password**. This password will be required to access any of the consoles (web, serial, Telnet). If you do not wish to create a password, leave the **Password** field blank and press **Enter**.

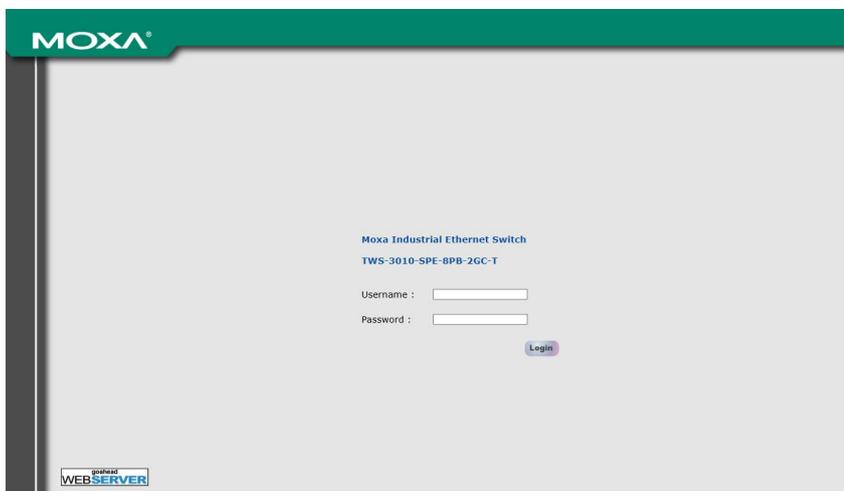



## NOTE

By default, the password assigned to the Moxa switch is **moxa**. Be sure to change the default password after you first log in to help keep your system secure.

3. After logging in, you may need to wait a few moments for the web console to appear. Use the folders in the left navigation panel to navigate between different pages of configuration options.

**MOXA Two-wire Ethernet Switch TWS-3000 Series** www.moxa.com

Model: TWS-3010-SPE-8PB-2GC-T    IP: 192.168.127.253    MAC Address: 00-90-E8-55-55-55    STATE:    FAULT  
 Name:    Serial No.: MOXA00000000    Firmware Version: V1.0 build 25102212    PWR1:    PWR2:  
 Location: Switch Location    ABC-02-USB-T: Device Not Present

Home  
 ▶ System  
 ▶ PoDL  
 ▶ VLAN  
 ▶ Port  
 ▶ Communication Redundancy  
 ▶ Multicast  
 ▶ QoS  
 ▶ Security  
 ▶ DHCP  
 ▶ SNMP  
 ▶ Industrial Protocol  
 ▶ Diagnostics  
 ▶ Monitoring  
 ▶ Tracking

Switch Name:    Switch Location  
 Switch Location:    Switch Location  
 Switch Description: TWS-3010-SPE-8PB-2GC-T  
 System Up Time:    00h15m22s  
 Redundancy Protocol: None

Event Log	More...	Time
Port G2 link off	--	--
Warm start by Factory Default	--	--
Port G2 link on 1G-FDX	--	--
Login Authentication success by Local for HTTP user 'admin' from 192.168.127.250.20448 with permission 'administrator'	--	--
Port G2 link off	--	--
Port G2 link on 1G-FDX	--	--
Port G2 link off	--	--
Port G2 link on 100M-FDX	--	--
Login Authentication success by Local for HTTP user 'admin' from 192.168.127.250.55115 with permission 'administrator'	--	--
Login Authentication success by Local for HTTP	--	--

## Disabling Telnet and Browser Access

If you are connecting the Moxa switch to a public network but do not intend to manage it over the network, we suggest disabling both the Telnet and web consoles. This is done from the RS-232 console by navigating to System Identification under **Basic Settings > System Information**. Disable or enable the **Telnet Console** and **Web Configuration** as shown below:

```

MOXA EtherDevice Switch EDS-510E-3GTXSFP
Basic Settings
[System Information] [User Account] [Trusted Access] [Port] [Network]
[Date and Time] [DIP] [CARP Timer] [Restart] [Factory default]
[Firmware Upgrade] [Config File] [Login mode] [Activate] [Main menu]
System Identification
ESC: Previous menu  Enter: Select  Space bar: Toggle

Switch Name      [ | ]
Switch Location  [Switch Location ]
Switch Description [EDS-510E-3GTXSFP ]
Contact Information [ ]

Serial NO.       03131
Firmware Version V3.3 build 13061918
MAC Address      00-90-E8-22-52-25

Telnet Console   [Enable ]
Web Configuration [http or https]
Web Auto-logout (s) [300 ]
Age-time (s)     [300 ]

```

# 3. Featured Functions

In this chapter, we explain how to access the Moxa switch's various configuration, monitoring, and management functions. These functions can be accessed by RS-232 console, Telnet console, or web console. The RS-232 console can be used if you do not know the Moxa switch's IP address. To access the RS-232 console, connect switch's RS-232 console to your PC's COM port. The Telnet and web consoles can be opened over an Ethernet LAN or the Internet.

The web console is the most user-friendly interface for configuring a Moxa switch. In this chapter, we use the web console interface to introduce the console functions. There are only a few differences between the web console, RS-232 console, and Telnet console.

## Home

The Home page shows the summary of the Moxa switch information including System Information, Redundancy Protocol, Event Log, and Device virtualization panel. By showing the switch's information and event log, the operators can easily understand the system and port link status at a glance.

Switch Name:	
Switch Location:	Switch Location
Switch Description:	TWS-3010-SPE-8PB-2GC-T
System Up Time:	0d0h15m52s
Redundancy Protocol:	None

Event Log	More...	Time
Port G2 link off		--
Warm start by Factory Default		--
Port G2 link on 1G-FDX		--
Login Authentication success by Local for HTTP user 'admin' from 192.168.127.250:20448 with permission 'administrator'		--
Port G2 link off		--
Port G2 link on 1G-FDX		--
Port G2 link off		--
Port G2 link on 100M-FDX		--
Login Authentication success by Local for HTTP user 'admin' from 192.168.127.250:55115 with permission 'administrator'		--
Login Authentication success by Local for HTTP		--



The image shows the front panel of a Moxa TWS-3010-SPE-8PB-2GC switch. It features a power button, a power jack (24VDC), a console port, a USB port, and two RJ45 ports labeled G1 and G2. The switch has several status LEDs for STATE, FAULT, PWR2, and PWR1. The Moxa logo is visible at the top left.

# System Settings

The **System Settings** section includes the most common settings required by administrators to maintain and control a Moxa switch.

## System Information

Define **System Information** items to make it easier to identify different switches that are connected to your network.

### Switch Name

Setting	Description	Factory Default
Max. 64 characters	This option is useful for differentiating between the roles or applications of different units. Do not insert spaces between characters. Example: factorySwitch1	none

### Switch Location

Setting	Description	Factory Default
Max. 255 characters	This option is useful for differentiating between the locations of different switches. Example: production line 1.	Switch Location

### Switch Description

Setting	Description	Factory Default
Max. 30 characters	This option is useful for recording a more detailed description of the unit.	Switch Model name

### Contact Information

Setting	Description	Factory Default
Max. 30 characters	This option is useful for providing information about who is responsible for maintaining this unit and how to contact this person.	None

### Web Login Message

Setting	Description	Factory Default
Max. 240 characters	This option is useful as it shows a message when a user's login is successful	Switch Location

### Login Authentication Failure Message

Setting	Description	Factory Default
Max. 240 characters	This option is useful as it shows a message when a user's login has failed	Switch Location

## User Account

The Moxa switch supports the management of accounts, including establishing, activating, modifying, disabling, and removing accounts. There are two levels of configuration access: admin and user. Accounts with **admin** authority have read/write access of all configuration parameters, whereas accounts with **user** authority only have read access to view configuration items.



### NOTE

1. In order to maintain a higher level of security, we strongly suggest that you change the password after you first log in.
2. By default, the **admin** user account cannot be deleted or disabled.

Active	User Name	Authority
<input checked="" type="checkbox"/>	admin	admin
<input checked="" type="checkbox"/>	user	user

### Active

Setting	Description	Factory Default
Checked	This account can access the switch's configuration settings.	Checked
Unchecked	This account cannot access the switch's configuration settings.	

### Authority

Setting	Description	Factory Default
admin	This account has read/write access of all configuration parameters.	admin
user	This account can only view configuration parameters.	

## Creating a New Account

Click **Create**, type in the username and password, and assign an authority to the new account. Click **Apply** to add the account to the **Account List** table.

Setting	Description	Factory Default
User Name (Max. of 16 characters)	The username for the user account.	None
Password (4 to 16 characters)	Password for the user account.	None



## NOTE

The maximum number of user accounts is 10.

## Modifying an Existing Account

Select an existing account from the Account List table, modify the account details, and then click **Apply** to save the changes.

### User Account

Active

Authority

User Name

Old Password

Password

Confirm Password

#### Account List

Active	User Name	Authority	
<input checked="" type="checkbox"/>	admin	admin	<input type="button" value="Delete"/>
<input checked="" type="checkbox"/>	user	user	<input type="button" value="Delete"/>

## Deleting an Existing Account

Select an account from the **Account List** table and then click **Delete** to delete the account.

### User Account

Active

Authority

User Name

Old Password

Password

Confirm Password

#### Account List

Active	User Name	Authority	
<input checked="" type="checkbox"/>	admin	admin	
<input checked="" type="checkbox"/>	user	user	<input type="button" value="Delete"/>
<input checked="" type="checkbox"/>	testuser1	admin	<input type="button" value="Delete"/>

Would you like to delete account "testuser1"

# Password Login Policy

In order to prevent hackers from cracking the password, Moxa switches allow users to configure a password for their account and lock the account in the event that the wrong password is entered. The account password policy requires passwords to be of a minimum length and complexity with a strength check. If Account Login Failure Lockout is enabled, you will need to configure the **Retry Failure Threshold** and **Lockout Time** parameters. If the number of login attempts exceeds the Retry Failure Threshold, users will need to wait the number of minutes configured in Lockout Time before trying again.

### Account Password and Login Management

#### Account Password Policy

Minimum Length  (4~16)

Enable password complexity strength check

- At least one digit (0~9)
- Mixed upper and lower case letters (A~Z, a~z)
- At least one special character (~!@#\$%^&\*~\_!;:,.<>[]{}())

#### Account Login Failure Lockout

Enable

Retry Failure Threshold  (1~10)

Lockout Time (min)  (1~60)

[Apply](#)



## NOTE

The valid special characters are: (~!@#\$%^&\*~\_!;:,.<>[]{}()).

# Network

Network configuration allows users to configure both IPv4 and IPv6 parameters for management access over the network. The Moxa switch supports both IPv4 and IPv6, and can be managed through either of these address types.

## IP Settings

The IPv4 settings include the switch’s IP address and subnet mask, as well as the IP address of the default gateway. In addition, input cells are provided for the IP addresses of a 1st and 2nd DNS server.

The IPv6 settings include two distinct address types—Link-Local Unicast addresses and Global Unicast addresses. A Link-Local address makes the switch accessible over IPv6 for all devices attached to the same local subnet. To connect to a larger network with multiple segments, the switch must be configured with a Global Unicast address.

### Get IP From

Setting	Description	Factory Default
DHCP	The Moxa switch’s IP address will be assigned automatically by the network’s DHCP server.	Manual
BOOTP	The Moxa switch’s IP address will be assigned automatically by the network’s BOOTP server.	
Manual	The Moxa switch’s IP address must be set manually.	

### IP Address

Setting	Description	Factory Default
IP address for the Moxa switch	Assigns the Moxa switch’s IP address on a TCP/IP network.	192.168.127.253

### Subnet Mask

Setting	Description	Factory Default
Subnet mask for the Moxa switch	Identifies the type of network the Moxa switch is connected to (e.g., 255.255.0.0 for a Class B network, or 255.255.255.0 for a Class C network).	24(255.255.255.0)

### Default Gateway

Setting	Description	Factory Default
IP address for gateway	Specifies the IP address of the router that connects the LAN to an outside network.	None

### DNS Server IP Addresses

Setting	Description	Factory Default
1st DNS Server	Specifies the IP address of the DNS server used by your network. After specifying the DNS server's IP address, you can use the Moxa switch's URL (e.g., www.PT.company.com) to open the web console instead of entering the IP address.	None
2nd DNS Server	Specifies the IP address of the secondary DNS server used by your network. The Moxa switch will use the secondary DNS server if the first DNS server fails to connect.	None

### IPv6 Global Unicast Address Prefix (Prefix Length: 64 bits) Default Gateway

Setting	Description	Factory Default
Global Unicast Address Prefix	The prefix value must be formatted according to the RFC 2373 "IPv6 Addressing Architecture," using 8 colon-separated 16-bit hexadecimal values. One double colon may be used in the address to indicate the appropriate number of zeros required to fill the undefined fields.	None

### IPv6 Global Unicast Address

Setting	Description	Factory Default
None	Displays the IPv6 Global Unicast address. The network portion of the Global Unicast address can be configured by specifying the Global Unicast Prefix and using an EUI-64 interface ID in the low order 64 bits. The host portion of the Global Unicast address is automatically generated using the modified EUI-64 form of the interface identifier (Switch's MAC address).	None

### IPv6 Link-Local Address

Setting	Description	Factory Default
None	The network portion of the Link-Local address is FE80 and the host portion of the Link-Local address is automatically generated using the modified EUI-64 form of the interface identifier (Switch's MAC address).	None

## IPv6 Neighbor Cache

The IPv6 neighbor cache includes the neighboring node's IPv6 address, the corresponding Link-Layer address, and the current state of the entry.

IPv6 Neighbor Cache		
IPv6 Address	Link Layer (MAC) Address	State
fe80::290:e8ff:fe02:406	00-90-e8-02-04-06	Reachable

# Date and Time

The Moxa switch has a time calibration function based on information from an NTP server or user specified time and date, allowing functions such as automatic warning emails to include a time and date stamp.



## NOTE

The user must update the Current Time and Current Date after powering off the switch for a long period of time (for example a few days). The user must pay particular attention to this when there is no NTP server, LAN, or Internet connection.

### System Time

System Up Time: 1d3h7m36s Refresh

Current Time: ---/--/-- --:--:--

Time Zone: (GMT)Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London ▾

**Daylight Saving**

	Month	Week	Day	Hour
Start Date	-- ▾	-- ▾	-- ▾	-- ▾
End Date	-- ▾	-- ▾	-- ▾	-- ▾
Offset(hr)	0 ▾			

### System Up Time

Indicates how long the Moxa switch has been up and running since the last cold start.

### Current Time

Setting	Description	Factory Default
User-specified time	Indicates time in yyyy-mm-dd format.	None

### Time Zone

Setting	Description	Factory Default
Time zone	Specifies the time zone, which is used to determine the local time offset from GMT (Greenwich Mean Time).	GMT (Greenwich Mean Time)

### Daylight Saving Time

The Daylight Saving Time settings are used to automatically set the Moxa switch's time ahead according to national standards.

#### Start Date

Setting	Description	Factory Default
User-specified date	Specifies the date that Daylight Saving Time begins.	None

#### End Date

Setting	Description	Factory Default
User-specified date	Specifies the date that Daylight Saving Time ends.	None

#### Offset

Setting	Description	Factory Default
User-specified hour	Specifies the number of hours that the time should be set forward during Daylight Saving Time.	None

### Clock Source

Setting	Description	Factory Default
Local	Configure clock source from local time	Local
NTP	Configure clock source from NTP	
SNTP	Configure clock source from SNTP	

## Clock Source is from Local

**Clock Source**  Local  NTP  SNTP

**Time Settings**

Manual Time Settings

Date (YYYY/MM/DD)  /  /

Time (HH:MM:SS)  :  :

Sync. from Local Device Time 2016/7/2 14:21:20

## Time Setting

The Time settings are set manually or synced automatically with Moxa's switch time.

## Clock Source is from NTP

The Moxa switch can work as an NTP client or NTP server. The user can enable the NTP Authentication function to do authentication with configured Authentication Key between the NTP client and NTP server.

**Clock Source**  Local  NTP  SNTP

**NTP Authentication Settings**

Enable NTP Authentication

**Authentication Key** ▼

Key ID	Type	Key String	Trusted
<input type="text"/>	MD5	<input type="text"/>	<input type="checkbox"/>
<input type="text"/>	MD5	<input type="text"/>	<input type="checkbox"/>
<input type="text"/>	MD5	<input type="text"/>	<input type="checkbox"/>
<input type="text"/>	MD5	<input type="text"/>	<input type="checkbox"/>
<input type="text"/>	MD5	<input type="text"/>	<input type="checkbox"/>

Note: Key ID - Authentication key for trusted time sources (1-65535)

**NTP Client Settings**

Index	Time Server/Peer Address	Authentication
1	time.nist.gov	<input type="checkbox"/> <input type="text"/>
2	<input type="text"/>	<input type="checkbox"/> <input type="text"/>

### NTP Authentication Settings

Setting	Description	Factory Default
Checked	Enable NTP Authentication	Unchecked
Unchecked	Disable NTP Authentication	

### Authentication Key

The user is able to configure up to five Authentication Keys in Moxa's switch database. Those Keys are encrypted by type MD5 and authorized between the NTP server and the NTP client.

#### Key ID

Setting	Description	Factory Default
Key ID	The ID of Authentication Key	Unchecked

#### Key String

Setting	Description	Factory Default
Key String	The Password of Authentication Key	Unchecked

### Trusted

Setting	Description	Factory Default
Checked	Enable the Authentication Key	Unchecked
Unchecked	Disable the Authentication Key	

### NTP Client Settings

The NTP server should be set when the Moxa switch is configured to work as an NTP client.

Setting	Description	Factory Default
Time Server/Peer Address	The domain of Time Server or Peer Address	time.nist.gov

### Authentication

Setting	Description	Factory Default
Checked	Enable NTP Authentication	Unchecked
Unchecked	Disable NTP Authentication.	
Key ID	Set Key ID that is used to be authorized	Null

### Clock Source is from SNTP

**Clock Source**  Local  NTP  SNTP

**SNTP Client Settings**

1<sup>st</sup> Time Server

2<sup>nd</sup> Time Server

Query Period  secs

### SNTP Client Settings

Setting	Description	Factory Default
1st Time Server	The IP or domain address (e.g., 192.168.1.1, time.stdtime.gov.tw, or time.nist.gov).	Time.nist.gov
2nd Time Server	The Moxa switch will try to locate the secondary SNTP server if the first SNTP server fails to connect.	
Query Period	The time period to sync with time server	600secs



### NOTE

Changing the time zone will automatically correct the current time. Be sure to set the time zone before setting the time.

**NTP/SNTP Server Settings**

Enable NTP/SNTP Server

The NTP server should be enabled when the Moxa switch is configured to work as an NTP server.

### Enable NTP/SNTP Server

Setting	Description	Factory Default
Enable/Disable	Enables SNTP/NTP server functionality for clients	Disabled

# Warning Notification

Since industrial Ethernet devices are often located at the endpoints of a system, these devices will not always know what is happening elsewhere on the network. This means that an industrial Ethernet switch that connects to these devices must provide system maintainers with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of devices almost instantaneously when exceptions occur. The Moxa switch supports different approaches to warn engineers automatically, such as email, trap, syslog and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarms by email and relay output.

## System Event Settings

System Events are related to the overall function of the switch. Each event can be activated independently with different warning approaches. The Administrator can decide the severity of each system event.

### System Event Settings

Active	Event	Action				Severity
		Trap	E-Mail	Syslog	Relay1	
<input checked="" type="checkbox"/>	Cold Start	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Critical
<input checked="" type="checkbox"/>	Warm Start	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	Config. Changed	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	PWR 1 Off->On	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	PWR 2 Off->On	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	PWR 1 On->Off	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	PWR 2 On->Off	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	Login Success	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	Login Fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	TACACS+ Auth. Success	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	TACACS+ Authentication Fail	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning

System Events	Description
Cold Start	Power is cut off and then reconnected.
Warm Start	The Moxa switch is rebooted, such as when network parameters are changed (IP address, subnet mask, etc.).
Configuration Change	Any configuration item has been changed.
Power Transition (On→Off)	The Moxa switch is powered down. (The relay will not be triggered when the device is powered up.)
Power Transition (Off→On)	The Moxa switch is powered up.
Login Success	The account logs in to the switch
Login Fail	An incorrect password was entered.
TACACS+ Auth. Success	The account is authorized by a TACACS+ server
TACACS Auth. Fail	Incorrect authentication details were entered
RADIUS Auth. Success	The account is authorized by a RADIUS server
RADIUS Authentication Fail	Incorrect authentication details were entered
Password Change	User changes the account password
RSTP Root Changed	If the RSTP root has changed
RSTP Topo. Changed	If any Rapid Spanning Tree Protocol switches have changed their position (applies only to the root of the tree)
DI1 (On→Off)	Digital Input 1 is triggered by an on to off transition
DI1 (Off→On)	Digital Input 1 is triggered by an off to on transition
ABC-02 Status	Detects if the ABC-02-USB-T is connected or disconnected to the switch when the ABC-02-USB-T automatically imports/exports/back-up the configuration

System Events	Description
Rate Limited On (Disable Port)	When the port is disabled due to the ingress throughput exceeding the configured rate limit.
Rate Limited Off (Disable Port)	The port disable function is off because it exceeds the traffic duration or the user changes "Port Disable" mode to "Drop Packet" mode.
Port Looping	Port looping event is triggered
LLDP Table Change	Nearly connected devices are changed and shown in the LLDP table
Login Failure Lockout	The attempt to log in exceeds the threshold
Account Info Changed	The account information has been changed
Configuration is Imported	When the configuration is successfully imported
SSL Certification is Imported	When SSL Certification is successfully imported
Fiber Check Warning	If the corresponding value of the fiber port status exceeds the threshold defined by the Fiber Check function
MAC Sticky Violation Port Disable	Any port with MAC sticky function is disabled because of a rule violation

Four response actions are available on the TWS series when events are triggered.

Action	Description
Trap	The TWS series will send a notification to the trap server when an event is triggered.
E-Mail	The TWS series will send a notification to the email server defined in the Email Setting.
Syslog	The TWS series will record a syslog to syslog server defined in Syslog Server Setting.
Relay	The TWS series supports digital inputs to integrate sensors. When an event is triggered, the device will automate alarms through the relay output.

## Severity

Severity	Description
Emergency	System is unusable
Alert	Action must be taken immediately
Critical	Critical conditions
Error	Error conditions
Warning	Warning conditions
Notice	Normal but significant condition
Information	Informational messages
Debug	Debug-level messages

## Port Event Settings

Port Events are related to the activity of a specific port.

### Port Event Settings

Active	Port	Link		Traffic			Action				Severity
		On	Off	Overload	RX-Threshold (%)	Traffic-Duration (s)	Trap	E-Mail	Syslog	Relay1	
<input checked="" type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	G1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	G2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning

Port Events	Warning e-mail is sent when...
Link-ON	The port is connected to another device.

Port Events	Warning e-mail is sent when...
Link-OFF	The port is disconnected (e.g., the cable is pulled out, or the opposing device shuts down).
Traffic-Overload	The port's traffic surpasses the Traffic-Threshold for that port (provided this item is Enabled).
Traffic-Threshold (%)	Enter a nonzero number if the port's Traffic-Overload item is Enabled.
Traffic-Duration (sec.)	A Traffic-Overload warning is sent every Traffic-Duration seconds if the average Traffic-Threshold is surpassed during that time period.

Four response actions are available on the TWS series when events are triggered.

Action	Description
Trap	The TWS series will send a notification to the trap server when an event is triggered.
E-Mail	The TWS series will send a notification to the email server defined in the Email Setting.
Syslog	The TWS series will record a syslog to syslog server defined in Syslog Server Setting.
Relay	The TWS series supports digital inputs to integrate sensors. When an event is triggered, the device will automate alarms through the relay output.

### Severity

Severity	Description
Emergency	System is unusable
Alert	Action must be taken immediately
Critical	Critical conditions
Error	Error conditions
Warning	Warning conditions
Notice	Normal but significant condition
Information	Informational messages
Debug	Debug-level messages



### NOTE

The Traffic-Overload, Traffic-Threshold (%), and Traffic-Duration (sec.) Port Event items are related. If you Enable the Traffic-Overload event, then be sure to enter a nonzero Traffic-Threshold percentage, as well as a Traffic-Duration between 1 and 300 seconds.

## Event Log Settings

This function is used to inform the user what the event log capacity status is and decide what action to take when an event log is oversized. Select the **Enable Log Capacity Warning** checkbox to set the threshold percentage. When the event log capacity is over the percentage, the switch will send a warning message by SNMP Trap or Email.

### Event Log Settings

Enable Log Capacity Warning at  (%)

Warning By:  SNMP Trap  Email

Event Log Oversize Action :

### Event Log Oversize Action

Setting	Description	Factory Default
Overwrite The Oldest Event Log	The oldest event log will be overwritten when the event log exceeds 1000 records.	Overwrite The Oldest Event Log

Setting	Description	Factory Default
Stop Recording Event Log	Additional events will not be recorded when the event log exceeds 1000 records.	

## Email Settings

**Email Setup**

Mail Server

TCP Port

User Name

Password

Sender Address

Use TLS  ▼

SMTP Server Auth Method  ▼

1st Recipient Email Address

2nd Recipient Email Address

3rd Recipient Email Address

4th Recipient Email Address

### Mail Server

Setting	Description	Factory Default
IP address or url	The IP Address or URL of the email server.	None

### TCP Port

Setting	Description	Factory Default
TCP Port number	The TCP port number of your email server.	25

### User Name

Setting	Description	Factory Default
Max. of 45 characters	Your email account name	None

### Password Setting

Setting	Description	Factory Default
Password	The email account password.	None

### Email Address

Setting	Description	Factory Default
Max. of 30 characters	You can set up to 4 email addresses to receive alarm emails from the Moxa switch.	None

### Sender Address

Setting	Description	Factory Default
Max. 30 characters	Sender Email Address	admin@localhost

### User TLS

Setting	Description	Factory Default
Yes/No	Enables TLS(Transport Layer Security)	No

### SMTP Server Auth Method

Setting	Description	Factory Default
Plain/Login/ CRAM-MD5	choose an authentication mechanism, PLAIN, LOGIN, and CRAM-MD5, to login SMTP Server	Plain

### Sending a Test Email

After you complete the email settings, you should first click **Apply** to activate those settings, and then press the **Test** button to verify that the settings are correct.



## NOTE

Auto warning e-mail messages will be sent through an authentication protected SMTP server that supports the CRAM-MD5, LOGIN, and PAIN methods of SASL (Simple Authentication and Security Layer) authentication mechanism.

We strongly recommend not entering your Account Name and Account Password if auto warning e-mail messages can be delivered without using an authentication mechanism.

## Syslog Server Settings

The Syslog function provides the event logs for the syslog server. The function supports 3 configurable syslog servers and syslog server UDP port numbers. When an event occurs, the event will be sent as a syslog UDP packet to the specified syslog servers. Each Syslog server can be activated separately by checking the appropriate checkbox to enable it.

### Syslog Settings

#### Server Settings

Syslog 1

Server

UDP Port  (1-65535)

Syslog 2

Server

UDP Port  (1-65535)

Syslog 3

Server

UDP Port  (1-65535)

#### Format Settings

CEF

### Syslog Server 1/2/3

Setting	Description	Factory Default
IP Address	Enter the IP address of Syslog server 1/2/3, used by your network.	None
Port Destination (1 to 65535)	Enter the UDP port of Syslog server 1/2/3.	514

### Format Settings

Setting	Description	Factory Default
CEF Checkbox	This function is designed to transform the log into CEF format.	Disabled



## NOTE

The following table shows the difference between the event logs with the original name and the CEF format revised name.

Event ID	Original Name (System Notification Web Interface)	Revised Name (Syslog CEF)
056(0x00000038)	PWR 1 Off->On	Power Transition
057(0x00000039)	PWR 2 Off->On	Power Transition
058(0x0000003a)	PWR 1 On->Off	Power Transition
059(0x0000003b)	PWR 2 On->Off	Power Transition
082(0x00000052)	TACACS+ Auth. Success	Login Success
098(0x00000062)	TACACS+ Authen Fail	Login Fail
099(0x00000063)	TACACS+ Authen Timeout	TACACS+ authentication server connect timeout
100(0x00000064)	TACACS+ Author Fail	Login Fail
101(0x00000065)	TACACS+ Author Timeout	TACACS+ authorization server connect timeout
102(0x00000066)	TACACS+ Accoun Fail	Login Fail
103(0x00000067)	TACACS+ Accoun Timeout	TACACS+ accounting server connect timeout
083(0x00000053)	RADIUS Auth. Success	Login Success
039(0x00000027)	RADIUS Auth. Fail	Login Fail
052(0x00000034)	DI 1 On	DI Transition
053(0x00000035)	DI 2 On	DI Transition
054(0x00000036)	DI 1 Off	DI Transition
055(0x00000037)	DI 2 Off	DI Transition
033(0x00000021)	Rate Limited On (Disable Port)	Rate Limited Port Disable Mode - Disable Port
034(0x00000022)	Rate Limited Off (Disable Port)	Rate Limited Port Disable Mode - Enable Port
091(0x0000005b)	EPS Off->On	PoE EPS(External Power Supply) transition
092(0x0000005c)	EPS On->Off	PoE EPS(External Power Supply) transition



## NOTE

The following events will be recorded into the Moxa switch's Event Log table, and will then be sent to the specified Syslog Server:

- Cold start
- Warm start
- Configuration change activated
- Power 1 or 2 transition: Off to On or On to Off
- Authentication fail
- Password change
- Redundancy protocol/topology change
- Master setting mismatch
- ABC-02 status
- Web log in
- Rate Limit on/off(Disable port)
- Port looping
- Port traffic overload
- dot1x Auth Fail
- Port link off/on

## Relay Warning Status

When a relay warning is triggered by either the system or port events, the administrator can turn off the hardware warning buzzer by clicking the **Apply** button. The event will still be recorded in the event list.

**Relay Warning Status**

Relay 1 Alarm Cut-Off (ACO)

**Apply**

Index	Event	Relay
-------	-------	-------



## NOTE

Relay 1 Alarm Cut-Off (ACO) setting will not be changed by configuration file import.

## MAC Address Table

The MAC address table shows the MAC address list passed through the Moxa switch. The Aging Time (15 to 3825 seconds) defines the length of time that a MAC address entry can remain in the Moxa switch. When an entry reaches its aging time, it “ages out” and is purged from the switch, effectively cancelling frame forwarding to that specific port.

The MAC Address table can be configured to display the following Moxa switch MAC address groups, which are selected from the drop-down list.

**MAC Address Table**

Aging Time (sec)  **Apply**

All  Page 1/4

Index	MAC	Type	VLAN	Port
1	64-51-06-4e-9c-1b	Unicast(I)	1	7
2	10-6f-3f-df-cc-86	Unicast(I)	1	7
3	00-14-fd-14-e2-54	Unicast(I)	1	7
4	00-0c-29-56-95-49	Unicast(I)	1	7
5	e4-11-5b-34-b9-b6	Unicast(I)	1	7
6	40-8d-5c-4d-ef-89	Unicast(I)	1	7
7	64-51-06-4a-3b-be	Unicast(I)	1	7
8	74-03-bd-ae-38-3a	Unicast(I)	1	7
9	00-26-18-33-11-d6	Unicast(I)	1	7
10	68-f7-28-df-ca-d7	Unicast(I)	1	7

### Drop Down List

<b>ALL</b>	Select this item to show all of the Moxa switch’s MAC addresses.
<b>ALL Learned</b>	Select this item to show all of the Moxa switch’s Learned MAC addresses.
<b>ALL Static</b>	Select this item to show all of the Moxa switch’s Static, Static Lock, and Static Multicast MAC addresses.
<b>ALL Multicast</b>	Select this item to show all of the Moxa switch’s Static Multicast MAC addresses.
<b>Port x</b>	Select this item to show all of the MAC address’s dedicated ports.

The table displays the following information:

<b>MAC</b>	This field shows the MAC address.
<b>Type</b>	This field shows the type of this MAC address.
<b>Port</b>	This field shows the port that this MAC address belongs to.

# System Files



## NOTE

SCP is a secure file transfer protocol used to transfer files between PCs over a network. SCP allows users to securely copy files and directories between hosts, and supports various authentication methods.

## Firmware Upgrade

There are three ways to update your Moxa switch's firmware: from a local \*.rom file, by remote TFTP server, and with Auto Backup Configurator (ABC-02).

The screenshot shows the 'Firmware Upgrade' section of a web interface. At the top, there are four radio buttons: 'Local' (selected), 'TFTP Server', 'SCP', and 'Auto Backup Configurator (ABC-02)'. Below the radio buttons is a text input field labeled 'Upgrade Firmware From' with a 'Browse' button to its right. At the bottom right of the form is an 'Upgrade' button.

### Local

1. Download the updated firmware (\*.rom) file from Moxa's website (www.moxa.com).
2. Browse for the (\*.rom) file, and then click the **Upgrade** button

### TFTP Server

1. Enter the TFTP Server's IP address.
2. Input the firmware file name (\*.rom) and click the **Upgrade** button.

### SCP

1. Enter the SCP Server's IP address.
2. Input the firmware file name (\*.rom).
3. Input the user's account name of the SCP Server.
4. Input the corresponding password for the account, and then click the **Upgrade** button.

### Auto Backup Configurator (ABC-02)

1. Download the updated firmware (\*.rom) file from Moxa's website (www.moxa.com).
2. Save the file to the ABC-02's **Moxa** folder. The file name cannot be longer than 8 characters, and the file extension must be **.rom**.
3. Browse for the firmware (\*.rom) file from the ABC-02, and then click the **Upgrade** button.

The screenshot shows the 'Firmware Upgrade' section of a web interface. At the top, there are three radio buttons: 'Local', 'TFTP Server', and 'Auto Backup Configurator (ABC-02)' (selected). Below the radio buttons is a text input field labeled 'Upgrade Firmware From' with a 'Browse' button to its right. At the bottom right of the form is an 'Upgrade' button. Below the 'Upgrade' button is a file selection dialog box with a light green background. The dialog box shows the path '/MOXA /HIS\_INI' and a 'Select' button at the bottom right.

## Configuration Backup and Restore

There are four ways to back up and restore your Moxa switch's configuration: from a local configuration file, by remote TFTP server, by remote SCP server, and with Auto Backup Configurator (ABC-02).

### Configuration Backup and Restore

Local  TFTP Server  SCP  Auto Backup Configurator (ABC-02)

Back up Configuration File to Local Computer Backup

Restore Configuration From  Browse  
Restore

#### Configuration File Encryption Setting

Enable Password  Apply

---

Auto load configuration from ABC-02 to system when boot up i

Auto backup to ABC-02 when configuration changes i

Apply

### Local

1. Click the Backup button to back up the configuration file to a local drive.
2. Browse for a configuration on a local disk, and then click the Restore button.

### TFTP Server

1. Enter the TFTP Server's IP address.
2. Input the backup/restore file name and then click the Backup/Restore button.



### NOTE

The file name can be up to 54 characters long, including the file extension (.ini).

### SCP

1. Enter the SCP Server's IP address.
2. Input the backup/restore file name.
3. Input the user's account name of the SCP Server.
4. Input the corresponding password for the account, and then click the **Backup/Restore** button.

### Auto Backup Configurator (ABC-02)

1. Click **Backup** to save the configuration file to the ABC-02. The file will be saved in the ABC-02's **Moxa** folder as a \*.ini file (e.g., Sys.ini).  
Note that two files will be saved to the ABC-02-USB's **Moxa** folder: **Sys.ini** and **MAC.ini**. The purpose of saving the two files is to identify which file will be used when **Auto load configuration from ABC to system when boot up** is activated.



### NOTE

MAC.ini is named using the last 6 digits of the switch's MAC address, without spaces.

2. Click **Browse** to select the configuration file, and then click **Restore** to start loading the configuration into your switch.
3. **Configuration File Encryption Setting**  
Select the **Configuration File Encryption Setting** checkbox, input the password, and then click **Apply**.
4. **Auto load configuration from ABC to system when boot up**  
Select the **Auto load configuration from ABC to system when boot up** checkbox and then click **Apply**. Note that this function is enabled by default.  
Power off your switch first, and then plug in the ABC-02. When you power on your switch, the system will detect the configuration file on the ABC-02 automatically. The switch will recognize the file name, with the following sequence priority:  
First priority: MAC.ini  
Second priority: Sys.ini  
If no matching configuration file is found, the fault LED light will turn on, and the switch will boot up normally.



## NOTE

MAC.ini is named using the last 6 digits of the switch's MAC address, without spaces.

5. **Auto backup to ABC-02 when configuration changes**  
Select the **Auto backup to ABC-02 when configuration change** checkbox and then click **Apply**. This function is disabled by default.  
The ABC-02 is capable of backing up switch configuration files automatically. While the ABC-02 is plugged into the switch, enable the **Auto backup to ABC-02 when configuration change** option, and then click **Apply**. Once this configuration is modified, the switch will back up the current configuration to the **/His\_ini** folder on the ABC-02. The file name will be the system date/time (MMDDHHmm.ini).



## NOTE

MM=month, DD=day, HH=hour, mm=minutes, from the system time.

## Log File Backup

There are four ways to back up Moxa switch's log files: from a local drive, by remote TFTP server, by remote SCP server, or with Auto Backup Configurator (ABC-02).

### Log File Backup

Local  
  TFTP Server  
  SCP  
  Auto Backup Configurator (ABC-02)

Server IP  Max. 15 characters

File Name  Max. 64 characters

Account  Max. 16 characters

Password  Max. 48 characters

**Backup**

---

Auto backup event log to prevent overwrite

**Apply**

### Local

Click the **Backup** button to back up the log file to a local drive.

### TFTP Server

Enter the TFTP Server's IP address and file name and then click the Backup button.

### SCP

Enter the SCP server's IP address, file name, account name, and password, and then click the **Backup** button.

### Auto Backup Configurator (ABC-02)

Click **Backup** to save the configuration file to the ABC-02. The file will be saved in the ABC-02's **Moxa** folder with filename **Sys.ini**.

### Auto backup of event log to prevent overwrite

This function is designed to maintain a long-term record of the switch's log files. Moxa Ethernet switches are capable of saving 1000 event log entries. When the 1000-entry storage limit is reached, the switch will delete the oldest saved event log. The ABC-02 can be used to back up these event logs. When the number of switch log entries reaches 1000, the ABC-02 will save the oldest 100 entries from the switch.

Enable the **Auto backup of event log to prevent overwrite**, and then click **Apply**. After that, when the ABC-02 is plugged into the switch, the event logs will always be saved to the ABC-02 automatically when the number of switch log entries reaches 1000. Each backup action saves the oldest 100 logs to the ABC-02 in one file, with the filename generated by the current system time as **MMDDHHmm.ini**. The file is saved to the **His\_log** folder.



## NOTE

MM=month, DD=day, HH=hour, mm=minutes, from the system time.

The log file includes the following information:

<b>Index</b>	An event index assigned to identify the event sequence.
<b>Bootup Number</b>	This field shows how many times the Moxa switch has been rebooted or cold started.
<b>Date</b>	The date is updated based on how the current date is set on the System Settings page.
<b>Time</b>	The time is updated based on how the current time is set on the System Settings page.
<b>System Startup Time</b>	The system startup time related to this event.
<b>Event</b>	Events that have occurred.

## Switch Reset Button

The Moxa switch reset button can be used to quickly reset the switch's configuration, and save the current configuration and log files to the ABC-02. Press the Reset button on bottom of the TWS switch to back up the current system configuration files and event logs to the ABC-02.



### NOTE

DO NOT remove the ABC-02 drive when performing an upgrade, backup, or restore.



### NOTE

The Moxa switch reset button can only be used in the first 10 minutes after powering on. If the Moxa switch has been powered on for a longer period, the switch should be restarted before using the reset button.


## Restart

The **Restart** function provides users with a quick way to restart the switch's operating system.



## Factory Default

The **Factory Default** function provides users with a quick way of restoring the Moxa switch's configuration to factory defaults. The function can be activated from the serial interface, via Telnet, through the web-based console, or with the hardware reset button.

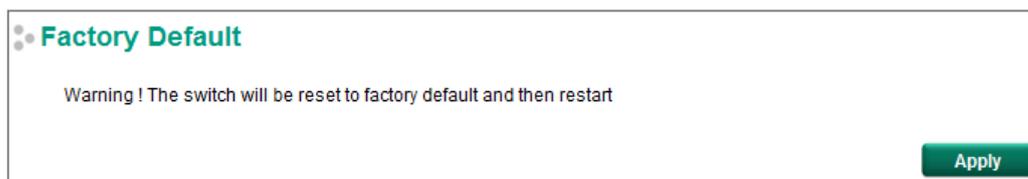

### NOTE

After restoring the factory default configuration, you will need to use the default network settings to re-establish the web or Telnet console connection with the Moxa switch.

## PoDL (PoDL Supported Models Only)

Power over Data Line (PoDL) is a technology that delivers both power and data over a single twisted pair cable. It enables easy connection of intelligent field devices in remote or space-limited areas while reducing installation effort and ensuring reliable long-distance communication.

In modern automation systems, PoDL provides a unified power and data infrastructure that supports the digitalization of field networks. Moxa's PoDL-enabled SPE switches support power classes 10, 11, and 12, empowering the next generation of field-level Ethernet connectivity.

## PoDL Settings

The PoDL Settings gives users control over the system's PoDL power output. The PoDL Settings page is divided into Three parts: PoDL System Configuration, PoDL Port Configuration, and PoDL Device Failure Check. Each part is discussed separately below.

**PoDL Settings**

**PoDL System Configuration**

PoDL Power Output:

PoDL Power Management Mode:

PoDL System Power Budget:  watts

Note: If a newly connected PD causes the total measured power to exceed the total power budget, the connected PD with the lowest priority will be denied power.

**PoDL Port Configuration**

Port	Power	Output Mode	Power Priority
P1	<input type="checkbox"/> Enable	Class 10	1
P2	<input type="checkbox"/> Enable	Class 10	2
P3	<input type="checkbox"/> Enable	Class 10	3
P4	<input type="checkbox"/> Enable	Class 10	4
P5	<input type="checkbox"/> Enable	Class 10	5
P6	<input type="checkbox"/> Enable	Class 10	6
P7	<input type="checkbox"/> Enable	Class 10	7
P8	<input type="checkbox"/> Enable	Class 10	8

Note: Please verify PD power class before enabling power output to avoid damage or safety hazards.

**PoDL Device Failure Check**

Port	Enable	PoDL Device Failure Check	No Response Timeout (Cycles 1 to 10)	Check Period (Seconds 5 to 300)	No Response Action
P1	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P2	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P3	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P4	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P5	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P6	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P7	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action
P8	<input type="checkbox"/>	IP: <input type="text"/>	3	10	No Action

# PoDL System Configuration



## NOTE

The configuration is different, depending on whether the “PoDL power output managed by” item is set to “Allocated Power” or “Measured Power.”

## PoDL Power Management by Allocated Power

**PoDL System Configuration**

PoDL Power Output Disable ▾

PoDL Power Management Mode Allocated Power ▾

PoDL System Power Budget 102 Watts

Note: If a newly connected PD causes the total allocated power to exceed the total power budget, the newly connected PD will be denied power.

Apply

## PoDL Power Management by Measured Power

**PoDL System Configuration**

PoDL Power Output Disable ▾

PoDL Power Management Mode Measured Power ▾

PoDL System Power Budget 102 watts

Note: If a newly connected PD causes the total measured power to exceed the total power budget, the connected PD with the lowest priority will be denied power.

Apply

## PoDL System Configuration Settings

### PoDL Power Output

Setting	Description	Factory Default
Enable	Enable PoDL power transmission to a PD.	Disable
Disable	Disable PoDL power transmission to a PD.	

### PoDL power management Mode

Setting	Description	Factory Default
Allocated Power	If a powered device is connected that would cause the total amount of power needed by all connected devices to exceed the total allocated power limit, the switch will not power up the device.	Measured Power
Measured Power	If a powered device is connected that would cause the total amount of power needed by all connected devices to exceed the total measured power limit, the switch will deny power to the device with the lowest priority.	

### PoDL system power budget

Setting	Description	Factory Default
wattage	Assigns the “Total measured power” limit for all PoDL ports combined.	TWS-3010-SPE-8PB-2GC-T: 102 W

## PoDL Port Configuration

**PoDL Port Configuration**

Port	Power	Output Mode	Power Priority
P1	<input type="checkbox"/> Enable	Class 10 ▼	1
P2	<input type="checkbox"/> Enable	Class 10 ▼	2
P3	<input type="checkbox"/> Enable	Class 10 ▼	3
P4	<input type="checkbox"/> Enable	Class 10 ▼	4
P5	<input type="checkbox"/> Enable	Class 10 ▼	5
P6	<input type="checkbox"/> Enable	Class 10 ▼	6
P7	<input type="checkbox"/> Enable	Class 10 ▼	7
P8	<input type="checkbox"/> Enable	Class 10 ▼	8

Note: Please verify PD power class before enabling power output to avoid damage or safety hazards.

### Power

Power Setting	Description	Factory Default
Checked	Allows data and power to be transmitted through the port.	Unchecked
Unchecked	Immediately shuts off power to that port.	

### Output Mode

Setting	Description
Class 10	Power transmission according to 802.3cg PoDL power class 10.
Class 11	Power transmission according to 802.3cg PoDL power class 11.
Class 12	Power transmission according to 802.3cg PoDL power class 12.

### Power Priority

Use **Power Priority** when managing PoDL power with measured power mode. The smaller the number, the higher the priority. You may set the same priority for different PoDL ports, but if you configure two ports with the same priority, then the port with the lower port number has the higher priority. The setting can range from 1 up to the total number of ports. When the PoDL measured power exceeds the assigned limit, the switch will disable the PoDL port with the lowest priority.

Setting	Description	Factory Default
1 to "number of PoDL ports"	The smaller the number, the higher the PoDL port priority. When the PoDL measured power exceeds the assigned limit, the switch will disable the PoDL port with the lowest priority.	The PoDL port index number

## PoDL Device Failure Check

The PoDL Ethernet switch can monitor the status of a PD via its IP address. If the PD fails, the switch will not receive a PD response after the defined period, and the authentication process will be restarted. This function is extremely useful for ensuring your network's reliability and reducing your management burden.

PoDL Device Failure Check

Port	Enable	PoDL Device Failure Check	No Response Timeout (Cycles 1 to 10)	Check Period (Seconds 5 to 300)	No Response Action
P1	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P2	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P3	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P4	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P5	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P6	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P7	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>
P8	<input type="checkbox"/>	IP: <input type="text"/>	3 <input type="text"/>	10 <input type="text"/>	No Action <input type="button" value="v"/>

**Enable**

Setting	Description	Factory Default
Checked	Enables the PD Failure Check function.	Unchecked
Unchecked	Disables the PD Failure Check function.	

**PoDL Device IP Address**

Setting	Description	Factory Default
Max. 15 Characters	Enter the PD's IPv4 address	None

**No Response Timeout**

Setting	Description	Factory Default
1 to 10	The maximum number of IP checking cycles.	3

**Check Period**

Setting	Description	Factory Default
5 to 300	Enter maximum time allowed for each IP checking cycle.	10

**No Response Action**

Setting	Description	Factory Default
No Action	No action on the PD.	No Action
Reboot PD	Reboot the PD after the PD Failure Check fail.	
Power Off PD	Power off the PD after the PD Failure Check fail.	

## PoDL Timetabling

The PoDL Ethernet switch provides a PoDL timetabling mechanism that lets users economize the system's power burden by setting a flexible working schedule for each PoDL port.

**PoDL Timetabling**

Port P1  Enable

	StartTime	EndTime	
<input type="checkbox"/> MON	0	~ 24	[ex : 00~24]
<input type="checkbox"/> TUE	0	~ 24	[ex : 00~24]
<input type="checkbox"/> WED	0	~ 24	[ex : 00~24]
<input type="checkbox"/> THU	0	~ 24	[ex : 00~24]
<input type="checkbox"/> FRI	0	~ 24	[ex : 00~24]
<input type="checkbox"/> SAT	0	~ 24	[ex : 00~24]
<input type="checkbox"/> SUN	0	~ 24	[ex : 00~24]

**Apply**

#### Port

Setting	Description	Factory Default
Port	Select which port you would like to configure.	Port 1

#### Enable

Setting	Description	Factory Default
Checked	Enables the PoDL function of the port for the defined time period.	Unchecked
Unchecked	Enables the PoDL function of the port all the time.	

#### MON, TUE, WED, THU, FRI, SAT, SUN

Setting	Description	Factory Default
Checked	Select those days on which you would like the port to be enabled (you will then be able to modify the StartTime and EndTime)	Unchecked
Unchecked	The port will not provide PoDL power on days that are not check marked.	

#### Start/End Time

Setting	Description	Factory Default
Configured time period	Enter the hour of the day the configuration will be enabled, and the hour of the day the configuration will be disabled.	0 to 24

## PoDL Warning Event Settings

Since industrial Ethernet devices are often located at the endpoints of a system, these devices do not always know what is happening elsewhere on the network. This means that a PoDL port connected to a PD must provide system administrators with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of the PD almost instantaneously when exceptions occur. The PoDL Ethernet switch supports different methods for warning engineers automatically, including SNMP trap, email, and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarms using email and relay output. The PoDL warning event settings are on the System Event Settings page.

### System Event Settings

Active	Event	Action				Severity
		Trap	E-Mail	Syslog	Relay1	
<input checked="" type="checkbox"/>	MAC Sticky Violation Port Disable	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Information
<input checked="" type="checkbox"/>	Tracking Status Changed	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	Port Enable Tracking Changed	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	MRP Multiple Managers	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	MRP Ring Open	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	PoDL Port Power On	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	PoDL Port Power Off	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	Over Measured Power Limitation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	Over Allocated Power Limitation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	PoDL Port Over Current	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	PD Failure Check	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert

**Apply**

#### Warning Type

Action	Description
Trap	The TWS series will send a notification to the trap server when an event is triggered.
E-Mail	The TWS series will send a notification to the email server defined in Email Settings.
Syslog	The TWS series will record a syslog to a syslog server defined in Syslog Server Settings.
Relay1	The TWS series supports digital inputs to integrate sensors. When an event is triggered, the device will automatically activate an alarm through the relay output.

#### Event Type

Port Events	Description
PoDL Port Power On	PoDL power is being output to the PD.
PoDL Port Power Off	The PoDL power output is cut off.
Over Measured Power Limitation	When the total PD power consumption exceeds the total measured power limit.
Over Allocated Power Limitation	When the total PD power consumption exceeds the total allocated power.
PoDL Port Over Current	The current of the port has exceeded the safety limit.
PD Failure Check	When the switch does not receive a PD response after the defined period.

## PoDL Port Status

PoDL Port Status helps users determine the PD conditions.

**PoDL Port Status**

**Monitoring Configuration**

Refresh Rate  seconds (5-300 seconds)

**PSE Status**

V<sub>EE</sub> Voltage  Volts

**Port Status**

Port	Status	Power Output	Current(mA)	Voltage (V)	Consumption (mW)	PD Failure Check Status
P1	Disable	OFF	N/A	N/A	N/A	Disabled
P2	Disable	OFF	N/A	N/A	N/A	Disabled
P3	Disable	OFF	N/A	N/A	N/A	Disabled
P4	Disable	OFF	N/A	N/A	N/A	Disabled
P5	Disable	OFF	N/A	N/A	N/A	Disabled
P6	Disable	OFF	N/A	N/A	N/A	Disabled
P7	Disable	OFF	N/A	N/A	N/A	Disabled
P8	Disable	OFF	N/A	N/A	N/A	Disabled

## Monitoring Configuration

### Refresh Rate

Setting	Description	Factory Default
5 to 300	The period of time for the system to refresh the PoDL Port Status (in seconds)	5

### PSE Status

#### V<sub>EE</sub> Voltage

Setting	Description	Factory Default
Read-only	The V <sub>EE</sub> voltage supplied by the PSE.	None

### Port Status

Item	Description
Status	Indicates if the PoDL function is enabled or disabled.
Power Output	Indicates the power output status of each PoDL port.
Current (mA)	Indicates the actual current consumed by each PoDL port.
Voltage (V)	Indicates the actual voltage consumed by each PoDL port.
Consumption (mW)	Indicates the actual Power consumed by each PoDL port.
PD Failure Check Status	Indicates the PD Failure Check status of each PoDL port. Alive: The system receives a response from all pings to the PD. Not Alive: The system receives no response from pings to the PD. Disabled: The PD Failure Check function is not activated.

# APL Power Supply (Ethernet-APL supported Models Only)

Ethernet-APL (Advanced Physical Layer) provides both power and data transmission over a single twisted pair cable, enabling direct Ethernet connectivity to field instruments in hazardous areas. This unified power and data infrastructure simplifies field wiring, reduces installation costs, and ensures reliable operation even in harsh process environments. Moxa's Ethernet-APL field switches support spur ports with power supplies to connect to PD devices, empowering the next generation of field-level Ethernet connectivity.

## APL Power Supply Settings

The APL Power Supply Settings page is divided into two parts: APL Port Power Supply Restoration and APL Powered Device Failure Check. Each part is discussed separately below.

### APL Power Supply Settings

**APL Port Power Supply Restoration**

Port	Select
S1	<input type="checkbox"/>
S2	<input type="checkbox"/>
S3	<input type="checkbox"/>
S4	<input type="checkbox"/>
S5	<input type="checkbox"/>
S6	<input type="checkbox"/>
S7	<input type="checkbox"/>
S8	<input type="checkbox"/>

Note: Please verify PD power class before restoring power output to avoid damage or safety hazards.

Apply

### APL Powered Device Failure Check

Port	Enable	Failure Check IP Address	No Response Timeout (Cycles 1 to 10)	Check Period (Seconds 5 to 300)	No Response Action
S1	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S2	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S3	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S4	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S5	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S6	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S7	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼
S8	<input type="checkbox"/>	IP: <input style="width: 80px;" type="text"/>	<input style="width: 40px;" type="text" value="3"/>	<input style="width: 40px;" type="text" value="10"/>	No Action ▼

Apply

### APL Port Power Supply Restoration

The APL Port Power Supply Restoration function provides users to restore the power output of an APL port. When a power overload occurs on a port, the port will automatically shut down to prevent damage. To restore power output, select the affected port and click Apply to re-enable it.

**APL Port Power Supply Restoration**

Port	Select
S1	<input type="checkbox"/>
S2	<input type="checkbox"/>
S3	<input type="checkbox"/>
S4	<input type="checkbox"/>
S5	<input type="checkbox"/>
S6	<input type="checkbox"/>
S7	<input type="checkbox"/>
S8	<input type="checkbox"/>

Note: Please verify PD power class before restoring power output to avoid damage or safety hazards.

**Apply**

**Select**

Setting	Description	Factory Default
Checked	Select this port to restore the power output.	Unchecked
Unchecked	Not select this port to restore the power output.	



**NOTE**

Please verify PD power class before restoring power output to avoid damage or safety hazards.

**APL Powered Device Failure Check**

The switch can monitor the status of a PD via its IP address. If the PD fails, the switch will not receive a PD response after the defined period, and the authentication process will be restarted. This function is extremely useful for ensuring your network's reliability and reducing your management burden.

**APL Powered Device Failure Check**

Port	Enable	Failure Check IP Address	No Response Timeout (Cycles 1 to 10)	Check Period (Seconds 5 to 300)	No Response Action
S1	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S2	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S3	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S4	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S5	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S6	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S7	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼
S8	<input type="checkbox"/>	IP: <input type="text"/>	<input type="text" value="3"/>	<input type="text" value="10"/>	No Action ▼

**Apply**

**Enable**

Setting	Description	Factory Default
Checked	Enables the PD Failure Check function.	Unchecked
Unchecked	Disables the PD Failure Check function.	

### Powered Device IP Address

Setting	Description	Factory Default
Max. 15 Characters	Enter the PD's IPv4 address.	None

### No Response Timeout

Setting	Description	Factory Default
1 to 10	The maximum number of IP checking cycles.	3

### Check Period

Setting	Description	Factory Default
5 to 300	Enter maximum time allowed for each IP checking cycle.	10

### No Response Action

Setting	Description	Factory Default
No Action	No action on the PD.	No Action
Reboot PD	Reboot the PD after the PD Failure Check fail.	

## APL Power Supply Warning Event Settings

Since industrial Ethernet devices are often located at the endpoints of a system, these devices do not always know what is happening elsewhere on the network. This means that an APL port connected to a PD must provide system administrators with real-time alarm messages. Even when control engineers are out of the control room for an extended period of time, they can still be informed of the status of the PD almost instantaneously when exceptions occur. The Ethernet-APL switch supports different methods for warning engineers automatically, including SNMP trap, email, and relay output. It also supports two digital inputs to integrate sensors into your system to automate alarms using email and relay output. The APL Power Supply Warning Event Settings are on the System Event Settings page.

### System Event Settings

Active	Event	Action				Severity
		Trap	E-Mail	Syslog	Relay1	
<input checked="" type="checkbox"/>	Configuration is Imported	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	SSL Certification is Imported			<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	Fiber Check Warning	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Warning
<input checked="" type="checkbox"/>	MAC Sticky Violation Port Disable	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		Information
<input checked="" type="checkbox"/>	Tracking Status Changed	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	Port Enable Tracking Changed	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	MRP Multiple Managers	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	MRP Ring Open	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		Warning
<input checked="" type="checkbox"/>	APL Port Overload	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	PD Failure Check	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alert
<input checked="" type="checkbox"/>	APL Port Power Restored	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		Alert

### Warning Type

Action	Description
Trap	The TWS series will send a notification to the trap server when an event is triggered.
E-Mail	The TWS series will send a notification to the email server defined in Email Settings.
Syslog	The TWS series will record a syslog to a syslog server defined in Syslog Server Settings.
Relay1	The TWS series supports digital inputs to integrate sensors. When an event is triggered, the device will automatically activate an alarm through the relay output.

### Event Type

Port Events	Description
APL Port Overload	The power output of the port has exceeded the safety limit.
PD Failure Check	When the switch does not receive a PD response after the defined period.
APL Port Power Restored	The power output of the APL port has been restored.

# APL Power Supply Status

APL Power Supply Status helps users determine the PD conditions.

**APL Power Supply Status**

**Monitoring Configuration**

Refresh Rate  seconds (5~300 seconds)

**Port Status**

Port	Power Output	Current (mA)	Voltage (V)	Consumption (mW)	PD Failure Check Status
S1	OFF	N/A	N/A	N/A	Disabled
S2	OFF	N/A	N/A	N/A	Disabled
S3	OFF	N/A	N/A	N/A	Disabled
S4	OFF	N/A	N/A	N/A	Disabled
S5	OFF	N/A	N/A	N/A	Disabled
S6	OFF	N/A	N/A	N/A	Disabled
S7	OFF	N/A	N/A	N/A	Disabled
S8	OFF	N/A	N/A	N/A	Disabled

## Monitoring Configuration

### Refresh Rate

Setting	Description	Factory Default
5 to 300	The period of time for the system to refresh the PoDL Port Status (in seconds)	5

### Port Status

Item	Description
Power Output	Indicates the power output status of each APL port.
Current (mA)	Indicates the actual current consumption by each APL port.
Voltage (V)	Indicates the actual voltage consumed by each APL port.
Consumption (mW)	Indicates the actual Power consumed by each APL port.
PD Failure Check Status	Indicates the PD Failure Check status of each APL port. Alive: The system receives a response from all pings to the PD. Not Alive: The system receives no response from pings to the PD. Disabled: The PD Failure Check function is not activated.

# VLAN


Setting up Virtual LANs (VLANs) on your Moxa switch increases the efficiency of your network by dividing the LAN into logical segments, as opposed to physical segments. In general, VLANs are easier to manage.

## The Virtual LAN (VLAN) Concept

### What is a VLAN?

A VLAN is a group of devices that can be located anywhere on a network, but which communicate as if they are on the same physical segment. With VLANs, you can segment your network without being restricted by physical connections—a limitation of traditional network design. With VLANs you can segment your network into:

- **Departmental groups**—You could have one VLAN for the marketing department, another for the finance department, and another for the product development department.
- **Hierarchical groups**—You could have one VLAN for directors, another for managers, and another for general staff.
- **Usage groups**—You could have one VLAN for email users and another for multimedia users.

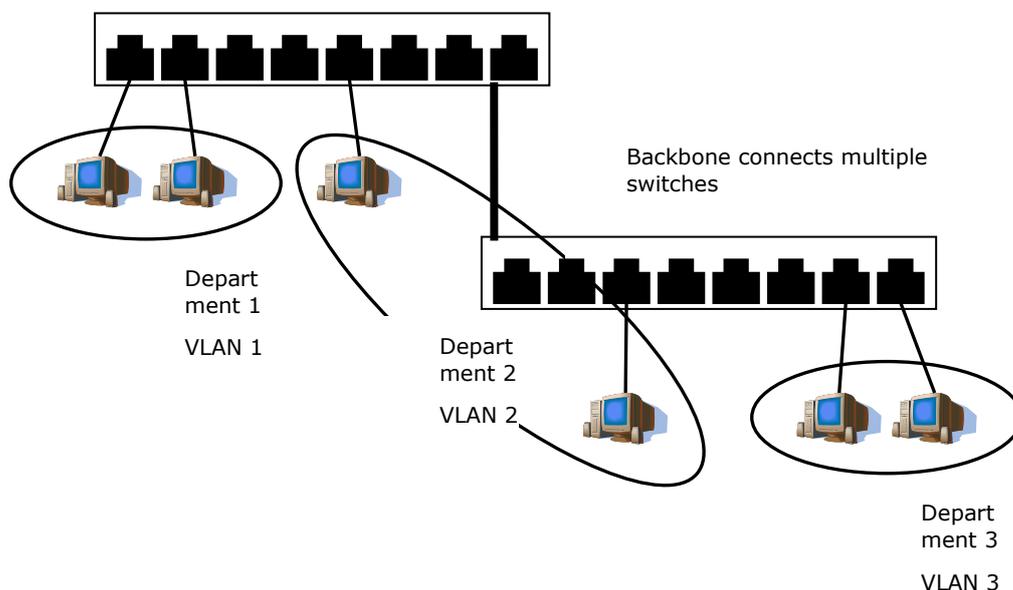

### Benefits of VLANs

The main benefit of VLANs is that they provide a network segmentation system that is far more flexible than traditional networks. Using VLANs also provides you with three other benefits:

- **VLANs ease the relocation of devices on networks:** With traditional networks, network administrators spend much of their time dealing with moves and changes. If users move to a different subnetwork, the addresses of each host must be updated manually. With a VLAN setup, if a host originally on the Marketing VLAN, is moved to a port on another part of the network, and retains its original subnet membership, you only need to specify that the new port is on the Marketing VLAN. You do not need to do any re-cabling.
- **VLANs provide extra security:** Devices within each VLAN can only communicate with other devices on the same VLAN. If a device on the Marketing VLAN needs to communicate with devices on the Finance VLAN, the traffic must pass through a routing device or Layer 3 switch.
- **VLANs help control traffic:** With traditional networks, congestion can be caused by broadcast traffic that is directed to all network devices, regardless of whether or not they need it. VLANs increase the efficiency of your network because each VLAN can be set up to contain only those devices that need to communicate with each other.

## VLANS and the Rackmount switch

Your Moxa switch provides support for VLANs using IEEE Std 802.1Q-1998. This standard allows traffic from multiple VLANs to be carried across one physical link. The IEEE Std 802.1Q-1998 standard allows each port on your Moxa switch to be placed as follows:

- On a single VLAN defined in the Moxa switch
- On several VLANs simultaneously using 802.1Q tagging

The standard requires that you define the 802.1Q VLAN ID for each VLAN on your Moxa switch before the switch can use it to forward traffic:

### Managing a VLAN

A new or initialized Moxa switch contains a single VLAN—the Default VLAN. This VLAN has the following definition:

- *VLAN Name*—Management VLAN
- *802.1Q VLAN ID*—1 (if tagging is required)

All the ports are initially placed on this VLAN, and it is the only VLAN that allows you to access the management software of the Moxa switch over the network.

### Communication Between VLANs

If devices connected to a VLAN need to communicate with devices on a different VLAN, a router or Layer 3 switching device with connections to both VLANs needs to be installed. Communication between VLANs can only take place if they are all connected to a routing or Layer 3 switching device.

### VLANS: Tagged and Untagged Membership

The Moxa switch supports 802.1Q VLAN tagging, a system that allows traffic for multiple VLANs to be carried on a single physical link (backbone, trunk). When setting up VLANs you need to understand when to use untagged or tagged membership of VLANs. Simply put, if a port is on a single VLAN it can be an untagged member, but if the port needs to be a member of multiple VLANs, a tagged membership must be defined.

A typical host (e.g., clients) will be an untagged member of one VLAN, defined as an **Access Port** in a Moxa switch, while an inter-switch connection will be a tagged member of all VLANs, defined as a **Trunk Port** in a Moxa switch.

The IEEE Std 802.1Q-1998 defines how VLANs operate within an open packet-switched network. An 802.1Q compliant packet carries additional information that allows a switch to determine which VLAN the port belongs to. If a frame is carrying the additional information, it is known as a tagged frame.


To carry multiple VLANs across a single physical link (backbone, trunk), each packet must be tagged with a VLAN identifier so that the switches can identify which packets belong in which VLAN. To communicate between VLANs, a router must be used.

The Moxa switch supports three types of VLAN port settings:

- **Access Port:** The port connects to a single device that is not tagged. The user must define the default port PVID that assigns which VLAN the device belongs to. Once the ingress packet of this Access Port egresses to another Trunk Port (the port needs all packets to carry tag information), the Moxa switch will insert this PVID into this packet so the next 802.1Q VLAN switch can recognize it.
- **Trunk Port:** The port connects to a LAN that consists of untagged devices, tagged devices, and/or switches and hubs. In general, the traffic of the Trunk Port must have a Tag. Users can also assign a PVID to a Trunk Port. The untagged packet on the Trunk Port will be assigned the default port PVID as its VID.
- **Hybrid Port:** The port is similar to a Trunk port, except users can explicitly assign tags to be removed from egress packets.

The following section illustrates how to use these ports to set up different applications.

## Sample Applications of VLANs Using Moxa Switches

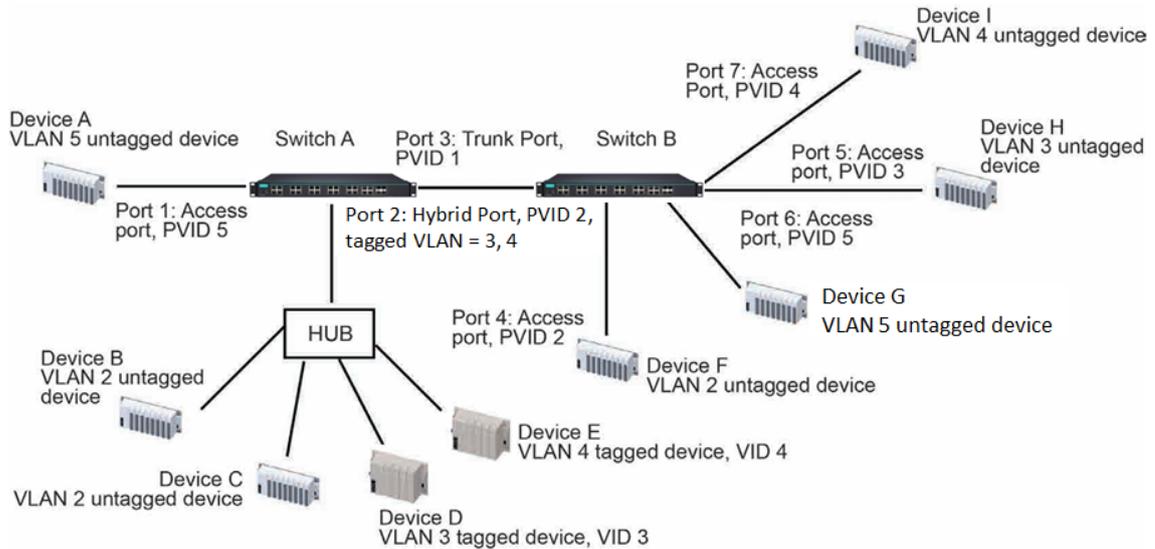

In this application:

- Port 1 connects a single untagged device and assigns it to VLAN 5; it should be configured as an **Access Port** with PVID 5.
- Port 2 connects a LAN with two untagged devices belonging to VLAN 2. One tagged device with VID 3 and one tagged device with VID 4. It should be configured as a **Hybrid Port** with PVID 2 for untagged device and Fixed VLAN (Tagged) with 3 and 4 for tagged device. Since each port can only have one unique PVID, all untagged devices on the same port must belong to the same VLAN.
- Port 3 connects with another switch. It should be configured as a **Trunk Port**. GVRP protocol will be used through the Trunk Port.
- Port 4 connects a single untagged device and assigns it to VLAN 2; it should be configured as an **Access Port** with PVID 2.
- Port 5 connects a single untagged device and assigns it to VLAN 3; it should be configured as an **Access Port** with PVID 3.
- Port 6 connect a single untagged device and assigns it to VLAN 5; it should be configured as an **Access Port** with PVID 5.
- Port 7 connects a single untagged device and assigns it to VLAN 4; it should be configured as an **Access Port** with PVID 4.

After the application is properly configured:

- Packets from Device A will travel through **Trunk Port 3** with tagged VID 5. Switch B will recognize its VLAN, pass it to port 6, and then remove tags received successfully by Device G, and vice versa.
- Packets from Devices B and C will travel through **Hybrid Port 2** with tagged VID 2. Switch B recognizes its VLAN, passes it to port 4, and then removes tags received successfully by Device F, and vice versa.
- Packets from Device D will travel through **Trunk Port 3** with tagged VID 3. Switch B will recognize its VLAN, pass to port 5, and then remove tags received successfully by Device H. Packets from Device H will travel through **Trunk Port 3** with PVID 3. Switch A will recognize its VLAN and pass it to port 2, but will not remove tags received successfully by Device D.
- Packets from Device E will travel through **Trunk Port 3** with tagged VID 4. Switch B will recognize its VLAN, pass it to port 7, and then remove tags received successfully by Device I. Packets from Device I will travel through **Trunk Port 3** with tagged VID 4. Switch A will recognize its VLAN and pass it to port 2, but will not remove tags received successfully by Device E.

# Configuring a Virtual LAN

To configure 802.1Q VLAN and port-based VLANs on the Moxa switch, use the **VLAN Settings** page to configure the ports for either an **802.1Q VLAN** or **Port-based VLAN**.

## VLAN Mode

Setting	Description	Factory Default
802.1Q VLAN	Sets VLAN mode to 802.1Q VLAN	802.1Q VLAN
Port-based VLAN	Sets VLAN mode to Port-based VLAN	

## VLAN Settings: 802.1Q

**VLAN Settings**

VLAN Mode: 802.1Q VLAN

**Quick Setting Panel**

Port	Type	PVID	Tagged VLAN	Untagged VLAN	Forbidden VLAN
G1,G4	Trunk	1	3		

Add

Note: Use port description such as "6", "G6", "1-6"  
 Note: 5,6,G1:G3 means the configuration will be copied to port 5,6,G1,G2,G3

**VLAN ID Configuration Table**

Enable GVRP:

Management VLAN ID: 1

Port	Type	PVID	Tagged VLAN	Untagged VLAN	Forbidden VLAN
G1	Trunk	1	3		
G2	Trunk	1	2		
G3	Trunk	1	2		
G4	Trunk	1	3		

When VLAN Mode is set to 802.1Q VLAN, the configuration options will be divided into the **Quick Setting Panel** and **VLAN ID Configuration Table**. The Quick Setting Panel is generally used to configure VLAN settings for groups of ports, with the settings pushed down to the VLAN ID Configuration Panel when the user clicks the Add button. The VLAN ID Configuration Table can be used to configure the settings for individual ports.

### Quick Setting Panel

The TWS series provides a **Quick Setting Panel** that administrators can use to quickly configure VLAN settings for single ports or groups of ports. To configure a group of ports, type the port names in the **Port** column, separated commas (,) for individual port names, or colons (:) to indicate a range of ports. For example, typing "G1,G3" applies the settings to ports G1 and G3, whereas typing "G1:G3" applies the settings to ports G1, G2, and G3. Next, if necessary configure **Type**, **PVID**, **Tagged VLAN**, **Untagged VLAN**, and **Forbidden VLAN**, and then click the **Add** button to move the settings down to the table at the bottom of the window.

### VLAN ID Configuration Table

#### Enable GVRP

Setting	Description	Factory Default
Checked/Unchecked	Check the checkbox to enable the GVRP function. Remove the checkmark to disable the GVRP function.	Disabled

#### Management VLAN ID

Setting	Description	Factory Default
1 to 4094	Assigns the VLAN ID to this Moxa switch.	1



## NOTE

Some of the following settings can be modified in the Quick Setting Panel.

### Port

Setting	Description	Factory Default
Port name	Read only	N/A

### Type

Setting	Description	Factory Default
Access	When this port is connected to a single device, without tags.	Access
Trunk	When this port is connected to another 802.1Q VLAN aware switch.	
Hybrid	When this port is connected to another Access 802.1Q VLAN aware switch or another LAN that combines tagged and/or untagged devices and/or other switches/hubs.	



## ATTENTION

For communication redundancy in the VLAN environment, set Redundant Port Coupling Ports and Coupling Control Ports to Trunk Port, since these ports act as the backbone for transmitting packets from different VLANs to different Moxa switch units.

### PVID

Setting	Description	Factory Default
1 to 4094	Sets the default VLAN ID for untagged devices connected to the port.	1

### Tagged VLAN

Setting	Description	Factory Default
1 to 4094	This field will be active only when selecting the Trunk or Hybrid port type. Set the other VLAN ID for tagged devices that connect to the port. Use commas to separate different VLANs.	None

### Untagged VLAN

Setting	Description	Factory Default
VID range from 1 to 4094	This field is only active when the Hybrid port type is selected. Set the other VLAN ID for tagged devices that connect to the port and tags that need to be removed in egress packets. Use commas to separate different VLANs.	None

### Forbidden VLAN

Setting	Description	Factory Default
1 to 4094	This field is only active when Trunk or Hybrid port type is selected. Set the other VLAN IDs that will not be supported by this port. Use commas to separate different VLANs.	None



## NOTE

The **Quick Setting Panel** provides a quick way of configuring multiple VLAN ports with the same setting.

## VLAN Settings: Port-based

When **VLAN Mode** is set to **Port-based VLAN**, the VLAN Settings window will appear as shown below. Select the appropriate checkbox under a port to assign the port to a VLAN. The maximum VLAN ID equals the number of switch ports. In the following example, all of the ports are assigned to VLAN 1.

**VLAN Settings**

VLAN Mode: Port-based VLAN ▾

VLAN	Port										
	1	2	3	4	5	6	7	G1	G2	G3	
1	<input checked="" type="checkbox"/>										
2	<input type="checkbox"/>										
3	<input type="checkbox"/>										
4	<input type="checkbox"/>										
5	<input type="checkbox"/>										
6	<input type="checkbox"/>										
7	<input type="checkbox"/>										
8	<input type="checkbox"/>										
9	<input type="checkbox"/>										
10	<input type="checkbox"/>										

Apply



### NOTE

When Port-based VLAN is configured, IGMP will be disabled.

## VLAN Name Setting

For the **802.1Q VLAN**, the user is able to set VLAN name of each VLAN ID (VID).

**VLAN Name Setting**

VID	Name
1	<input style="width: 95%;" type="text"/>

Apply

### VLAN Name Setting

Setting	Description	Factory Default
Name	The VLAN name can only include these characters, a-z/A-Z/0-9/-/_/	Null

# VLAN Table

**VLAN Table**

VLAN Mode: 802.1Q VLAN  
 Management VLAN: 1

Index	VID	Name	Joined Access Port	Joined Trunk Port	Joined Hybrid Port
1	1		1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, G1, G2, G3, G4,		

**VLAN Table**

VLAN Mode: Port-based VLAN

Index	VLAN	Joined Port
1	1	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, G1, G2, G3, G4,

Use the **802.1Q VLAN** table to review the VLAN groups that were created, VLAN Name, **Joined Access Ports, Trunk Ports,** and **Hybrid Ports,** and use the **Port-based VLAN** table to review the **VLAN groups** and **Joined Ports.**

# Port

## Port Settings

Port settings are included to give the user control over port access, port transmission speed, flow control, and port type (MDI or MDIX).

**Port Settings**

Port	Enable	Media Type	Description	Speed	Flow Ctrl	MDI/MDIX	Link Disable	TID
P3	<input checked="" type="checkbox"/>	10T1L,SPE		Auto	Disable	--	<input type="checkbox"/>	N/A
P4	<input checked="" type="checkbox"/>	10T1L,SPE		Auto	Disable	--	<input type="checkbox"/>	N/A
P5	<input checked="" type="checkbox"/>	10T1L,SPE		Auto	Disable	--	<input type="checkbox"/>	N/A
P6	<input checked="" type="checkbox"/>	10T1L,SPE		Auto	Disable	--	<input type="checkbox"/>	N/A
P7	<input checked="" type="checkbox"/>	10T1L,SPE		Auto	Disable	--	<input type="checkbox"/>	N/A
P8	<input checked="" type="checkbox"/>	10T1L,SPE		Auto	Disable	--	<input type="checkbox"/>	N/A
G1	<input checked="" type="checkbox"/>	1000TX,RJ45.		Auto	Disable	Auto	<input type="checkbox"/>	N/A
G2	<input checked="" type="checkbox"/>	1000TX,RJ45.		Auto	Disable	Auto	<input type="checkbox"/>	N/A

**Apply**

**Enable**

Setting	Description	Factory Default
Checked	Allows data transmission through the port.	Checked
Unchecked	Immediately shuts off port access.	

### Media Type

Setting	Description	Factory Default
Media type	Displays the media type for each module's port	N/A

### Description

Setting	Description	Factory Default
Max. 63 characters	Specifies an alias for the port to help administrators differentiate between different ports. Example: PLC 1	None

### Speed

Setting	Description	Factory Default
Auto	Allows the port to use the IEEE 802.3u protocol to negotiate with connected devices. The port and connected devices will determine the best speed for that connection.	Auto
100M-Full	Choose one of these fixed speed options if the connected Ethernet device has trouble auto-negotiating for line speed.	
100M-Half		
10M-Full		
10M-Half		

### FDX Flow Ctrl

This setting enables or disables flow control for the port when the port's Speed is set to Auto. The final result will be determined by the Auto process between the Moxa switch and connected devices. Flow control should be enabled on both the ingress and egress ports of the Moxa switch as well as being enabled between both ends of the Moxa switch and the connected devices.

Setting	Description	Factory Default
Enable	Enables flow control for this port when the port's Speed is set to Auto.	Disabled
Disable	Disables flow control for this port when the port's Speed is set to Auto.	

### MDI/MDIX

Setting	Description	Factory Default
Auto	Allows the port to auto-detect the port type of the connected Ethernet device and change the port type accordingly.	Auto
MDI	Choose MDI or MDIX if the connected Ethernet device has trouble auto-negotiating for port type.	
MDIX		



## NOTE

For Gigabit ports and 10Base-T1L ports, MDI/MDIX are only Auto mode.

## Port Status

The following table shows the status of each port, including the media type, link status, flow control, and port state.

Port Status					
Port	Media Type	Link Status	MDI/MDIX Status	Flow Control	Port State
P1	10T1L,SPE	Link Down	--	--	--
P2	10T1L,SPE	Link Down	--	--	--
P3	10T1L,SPE	Link Down	--	--	--
P4	10T1L,SPE	Link Down	--	--	--
P5	10T1L,SPE	Link Down	--	--	--
P6	10T1L,SPE	Link Down	--	--	--
P7	10T1L,SPE	Link Down	--	--	--
P8	10T1L,SPE	Link Down	--	--	--
G1	1000TX,RJ45.	Link Down	--	--	--
G2	1000TX,RJ45.	100M Full	MDI	Off	Forwarding

## Link Aggregation

Link aggregation involves grouping links into a link aggregation group. A MAC client can treat link aggregation groups as if they were a single link.

The Moxa switch's port trunking feature allows devices to communicate by aggregating up to 4 trunk groups, with a maximum of 8 ports for each group. If one of the 8 ports fails, the other seven ports will automatically provide backup and share the traffic.

Port trunking can be used to combine up to 8 ports between two Moxa switches. If all ports on both switches are configured as 100BaseTX and they are operating in full duplex, the potential bandwidth of the connection will be 1600 Mbps.

## The Port Trunking Concept

Moxa has developed a port trunking protocol that provides the following benefits:

- Greater flexibility in setting up your network connections, since the bandwidth of a link can be doubled, tripled, or quadrupled.
- Redundancy—if one link is broken, the remaining trunked ports share the traffic within this trunk group.
- Load sharing—MAC client traffic can be distributed across multiple links.

To avoid broadcast storms or loops in your network while configuring a trunk, first disable or disconnect all ports that you want to add to the trunk or remove from the trunk. After you finish configuring the trunk, enable or re-connect the ports.

If all ports on both switch units are configured as 100BaseTX and they are operating in full duplex mode, the potential bandwidth of the connection will be up to 1.6 Gbps. This means that users can double, triple, or quadruple the bandwidth of the connection by port trunking between two Moxa switches.

Each Moxa switch can set a maximum of 3 port trunking groups. When you activate port trunking, certain settings on each port will be reset to factory default values or disabled:

- Communication redundancy will be reset.
- 802.1Q VLAN will be reset.
- Multicast Filtering will be reset.
- Port Lock will be reset and disabled.
- Set Device IP will be reset.
- Mirror will be reset.

After port trunking has been activated, you can configure these items again for each trunking port.

## Port Trunking

The **Port Trunking Settings** page is where ports are assigned to a trunk group.

**Port Trunking**

Group Trk1 Type Static

Select	Port	Media Type	Description	Link Status
<input type="checkbox"/>	P4	10T1L,SPE		Link down
<input type="checkbox"/>	P5	10T1L,SPE		Link down
<input type="checkbox"/>	P6	10T1L,SPE		Link down
<input type="checkbox"/>	P7	10T1L,SPE		Link down
<input type="checkbox"/>	P8	10T1L,SPE		Link down
<input type="checkbox"/>	G1	1000TX,RJ45.		Link down
<input type="checkbox"/>	G2	1000TX,RJ45.		100M Full

**Apply**

Group	Type	Member Ports
-------	------	--------------

**Step 1:** Select the desired **Trunk Group**

**Step 2:** Select the **Trunk Type** (Static or LACP).

**Step 3:** Select the Trunk Group to modify the desired ports if necessary

### Trunk Group (maximum of 4 trunk groups)

Setting	Description	Factory Default
Trk1, Trk2, Trk3, Trk4 (depends on switching chip capability; some Moxa switches only support 3 trunk groups), TWS series support 4 trunk groups)	Specifies the current trunk group.	Trk1

### Trunk Type

Setting	Description	Factory Default
Static	Selects Moxa's static trunking protocol.	Static
LACP	Selects LACP (IEEE 802.3ad, Link Aggregation Control Protocol).	Static

## Trunking Status

The **Trunking Status table** shows the Trunk Group configuration status.

**Trunking Status**

Group	Type	Member Ports	Status
Trk1	Static	3	Success
		4	Success
Trk2	LACP	5	Fail
		6	Fail

# Link-Swap Fast Recovery

The Link-Swap Fast Recovery function, which is enabled by default, allows the Moxa switch to return to normal operation extremely quickly after devices are unplugged and then re-plugged into different ports. The recovery time is on the order of a few milliseconds (compare this with standard commercial switches for which the recovery time could be on the order of several minutes). To disable the Link-Swap Fast Recovery function, or to re-enable the function after it has already been disabled, access either the Console utility's **Link-Swap recovery** page, or the Web Browser interface's **Link-Swap fast recovery** page, as shown below.



## Link-Swap-Fast-Recovery

Setting	Description	Factory Default
Enable/Disable	Select the checkbox to enable the Link-Swap-Fast-Recovery function	Enable

# Multicast

Multicast filtering improves the performance of networks that carry multicast traffic. This section explains multicasts, multicast filtering, and how multicast filtering can be implemented on your Moxa switch.

## The Concept of Multicast Filtering

### What is an IP Multicast?

A multicast is a packet sent by one host to multiple hosts. Only those hosts that belong to a specific multicast group will receive the multicast. If the network is set up correctly, a multicast can only be sent to an end-station or a subset of end-stations on a LAN or VLAN that belong to the multicast group. Multicast group members can be distributed across multiple subnets, so that multicast transmissions can occur within a campus LAN or over a WAN. In addition, networks that support IP multicast send only one copy of the desired information across the network until the delivery path that reaches group members diverges. To make more efficient use of network bandwidth, it is only at these points that multicast packets are duplicated and forwarded. A multicast packet has a multicast group address in the destination address field of the packet's IP header.

### Benefits of Multicast

The benefits of using IP multicast are:


- It uses the most efficient, sensible method to deliver the same information to many receivers with only one transmission.
- It reduces the load on the source (for example, a server) since it will not need to produce several copies of the same data.
- It makes efficient use of network bandwidth and scales well as the number of multicast group members increases.
- Works with other IP protocols and services, such as Quality of Service (QoS).

Multicast transmission makes more sense and is more efficient than unicast transmission for some applications. For example, multicasts are often used for video-conferencing, since high volumes of traffic must be sent to several end-stations at the same time, but where broadcasting the traffic to all end-stations would cause a substantial reduction in network performance. Furthermore, several industrial automation protocols, such as Allen-Bradley, EtherNet/IP, Siemens Profibus, and Foundation Fieldbus HSE (High Speed Ethernet), use multicast. These industrial Ethernet protocols use publisher/subscriber communications models by multicasting packets that could flood a network with heavy traffic. IGMP Snooping is used to prune multicast traffic so that it travels only to those end destinations that require the traffic, reducing the amount of traffic on the Ethernet LAN.

## Multicast Filtering


Multicast filtering ensures that only end-stations that have joined certain groups receive multicast traffic. With multicast filtering, network devices only forward multicast traffic to the ports that are connected to registered end-stations. The following two figures illustrate how a network behaves without multicast filtering, and with multicast filtering.

### Network without multicast filtering

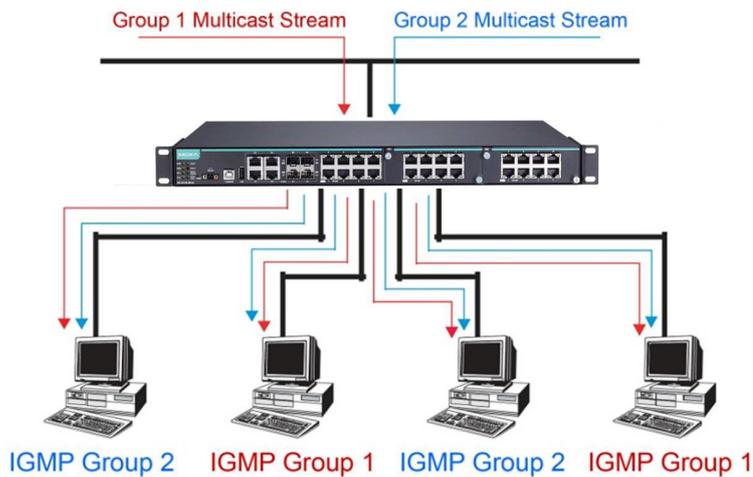

All hosts receive the multicast traffic, even if they don't need it.

### Network with multicast filtering

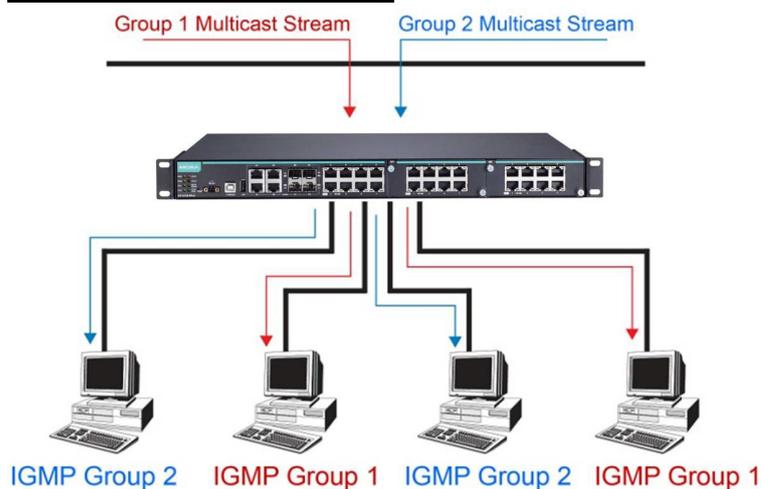

Hosts only receive dedicated traffic from other hosts belonging to the same group.

## Multicast Filtering and Moxa's Industrial Rackmount Switches

There are three ways to achieve multicast filtering with a Moxa switch: IGMP (Internet Group Management Protocol) Snooping, GMRP (GARP Multicast Registration Protocol), and adding a static multicast MAC manually to filter multicast traffic automatically.

### Snooping Mode

Snooping Mode allows your switch to forward multicast packets only to the appropriate ports. The switch snoops on exchanges between hosts and an IGMP device, such as a router, to find those ports that want to join a multicast group, and then configures its filters accordingly.

### Query Mode

Query mode allows the Moxa switch to work as the Querier if it has the lowest IP address on the subnetwork to which it belongs.



## NOTE

IGMP Snooping Enhanced mode is only provided in Layer 2 switches.

IGMP querying is enabled by default on the Moxa switch to ensure that query election is activated. Enable query mode to run multicast sessions on a network that does not contain IGMP routers (or queriers). Query mode allows users to enable IGMP snooping by VLAN ID. Moxa switches support IGMP snooping version 1, version 2, and version 3. Version 2 is compatible with version 1. The default setting is IGMP V1/V2.



## NOTE

Moxa Layer 3 switches are compatible with any device that conforms to the IGMP v2 and IGMP v3 device protocols. Layer 2 switches only support IGMP v1/v2.

## IGMP Multicast Filtering

IGMP is used by IP-supporting network devices to register hosts with multicast groups. It can be used on all LANs and VLANs that contain a multicast capable IP router, and on other network devices that support multicast filtering. Moxa switches support IGMP version 1, 2 and 3. IGMP version 1 and 2 work as follows:

- The IP router (or querier) periodically sends query packets to all end-stations on the LANs or VLANs that are connected to it. For networks with more than one IP router, the router with the lowest IP address is the querier. A switch with IP address lower than the IP address of any other IGMP queriers connected to the LAN or VLAN can become the IGMP querier.
- When an IP host receives a query packet, it sends a report packet back that identifies the multicast group that the end-station would like to join.
- When the report packet arrives at a port on a switch with IGMP Snooping enabled, the switch knows that the port should forward traffic for the multicast group, and then proceeds to forward the packet to the router.
- When the router receives the report packet, it registers that the LAN or VLAN requires traffic for the multicast groups.
- When the router forwards traffic for the multicast group to the LAN or VLAN, the switches only forward the traffic to ports that received a report packet.

IGMP version 3 supports "source filtering," which allows the system to define how to treat packets from specified source addresses. The system can either white-list or black-list specified sources.

### IGMP version comparison

IGMP Version	Main Features	Reference
V1	Periodic query	RFC-1112
V2	Compatible with V1 and adds: <ol style="list-style-type: none"> <li>1. Group-specific query</li> <li>2. Leave group messages</li> <li>3. Resends specific queries to verify leave message was the last one in the group</li> <li>4. Querier election</li> </ol>	RFC-2236
V3	Compatible with V1, V2, and adds: <p>Source filtering</p> <ul style="list-style-type: none"> <li>• accept multicast traffic from specified source</li> <li>• accept multicast traffic from any source except the specified source</li> </ul>	RFC-3376

## GMRP (GARP Multicast Registration Protocol)

Moxa switches support IEEE 802.1D-1998 GMRP (GARP Multicast Registration Protocol), which is different from IGMP (Internet Group Management Protocol). GMRP is a MAC-based multicast management protocol, whereas IGMP is IP-based. GMRP provides a mechanism that allows bridges and end stations to register or de-register Group membership information dynamically. GMRP functions similarly to GVRP, except that GMRP registers multicast addresses on ports. When a port receives a **GMRP-join** message, it will register the multicast address to its database if the multicast address is not registered, and all the multicast packets with that multicast address are able to be forwarded from this port. When a port receives a **GMRP-leave** message, it will de-register the multicast address from its database, and all the multicast packets with this multicast address will not be able to be forwarded from this port.

## Static Multicast MAC

Some devices may only support multicast packets, but not support either IGMP Snooping or GMRP. The Moxa switch supports adding multicast groups manually to enable multicast filtering.

## Enabling Multicast Filtering

Use the RS-232 console or web interface to enable or disable IGMP Snooping and IGMP querying. If IGMP Snooping is not enabled, then IP multicast traffic is always forwarded, flooding the network.

## IGMP Snooping

IGMP Snooping provides the ability to prune multicast traffic so that it travels only to those end destinations that require that traffic, thereby reducing the amount of traffic on the Ethernet LAN.



### NOTE

IGMP Snooping will be disabled when Port-Based VLAN is enabled.

## IGMP Snooping Setting

### IGMP Snooping Settings

Enable IGMP Snooping      Query Interval (sec)

Enable Multicast Fast Forwarding Mode

VID	Enable IGMP Snooping	Querier	Static Multicast Querier Port
1	<input checked="" type="checkbox"/>	V1/V2 ▾	<input type="checkbox"/> P1 <input type="checkbox"/> P2 <input type="checkbox"/> P3 <input type="checkbox"/> P4 <input type="checkbox"/> P5 <input type="checkbox"/> P6 <input type="checkbox"/> P7 <input type="checkbox"/> P8 <input type="checkbox"/> G1 <input type="checkbox"/> G2

### Enable IGMP Snooping (Global)

Setting	Description	Factory Default
Enable/Disable	Select the Enable IGMP Snooping checkbox near the top of the window to enable the IGMP Snooping function globally.	Disabled

### Query Interval (sec)

Setting	Description	Factory Default
Numerical value, input by the user	Sets the query interval of the Querier function globally. Valid settings are from 20 to 600 seconds.	125 seconds

### Enable Multicast Fast Forwarding Mode

Setting	Description	Factory Default
Enable/Disable	Select the Enable Multicast Fast Forwarding Mode checkbox to achieve fast multicast forwarding path re-learning while the ring redundant network is down. <b>NOTE:</b> This function is supported by switches supporting Turbo Ring V2 or Turbo Chain, and Turbo Ring V2 or Turbo Chain must be enabled.	Disabled

### Enable IGMP Snooping

Setting	Description	Factory Default
Enable/Disable	Enables or disables the IGMP Snooping function on that particular VLAN.	Enabled if IGMP Snooping is enabled globally

### Querier

Setting	Description	Factory Default
Disable	Disables the Moxa switch's querier function.	V1/V2
V1/V2 and V3 checkbox	V1/V2: Enables the switch to send IGMP queries that are compatible for both V1 and V2. V3: Enables the switch to send IGMP snooping version 3 queries	

### Static Multicast Querier Port

Setting	Description	Factory Default
Select/Deselect	Select the ports that will connect to the multicast routers. These ports will receive all multicast packets from the source. This option is only active when IGMP Snooping is enabled.	Disabled



### NOTE

If a router or layer 3 switch is connected to the network, it will act as the Querier, and consequently this Querier option will be disabled on all Moxa layer 2 switches.

If all switches on the network are Moxa layer 2 switches, then only one layer 2 switch will act as Querier.



### NOTE

Multicast Fast Forwarding Mode is one function of V-ON technology that should be enabled in layer 2 and layer 3 switches. For a detailed introduction, refer to *Moxa Managed Ethernet Switch Redundancy Protocol (UI 2.0) User Manual*.

## IGMP Group Status

The Moxa switch displays the current active IGMP groups that were detected. On this page, you can view IGMP group settings by VLAN ID.

### IGMP Group Status

VID:

Dynamic Router Port	Static Router Port	Querier Connected Port	Role
		G12 (192.168.127.252)	Non-Querier

Index	Group	Port	Version	Filter Mode	Sources
-------	-------	------	---------	-------------	---------

The information shown in the table includes:

- Dynamic Router Port: Indicates that a multicast router connects to or sends packets from these port(s).
- Static Router Port: Displays the static multicast querier port(s).
- Querier Connected Port: Displays the port that is connected to the querier and the connected querier IP address.
- Role: Indicates if the switch is a querier. Displays Querier or Non-Querier.
- Group: Displays the multicast group addresses.
- Port: Displays the port that receives the multicast stream or the port the multicast stream is forwarded to.
- Version: Displays the IGMP Snooping version.
- Filter Mode: Indicates that the multicast source address is included or excluded. Displays Include or Exclude when IGMP v3 is enabled.
- Sources: Displays the multicast source address when IGMP v3 is enabled.

## Static Multicast Address

**Static Multicast Address**

MAC Address  -  -  -  -  -

Member Port  P1  P2  P3  P4  P5  P6  P7  P8  
 G1  G2

All	MAC Address	Member Port
■		



### NOTE

The MAC address (01:00:5E:XX:XX:XX) will appear on the Static Multicast Address page. Activate IGMP Snooping to implement automatic classification.

#### MAC Address

Setting	Description	Factory Default
Integer	Type the MAC address in the MAC Address field to specify a static multicast address.	None

#### Member Port

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to define the join ports for this multicast group.	None

# GMRP

GMRP is a MAC-based multicast management protocol, whereas IGMP is IP-based. GMRP provides a mechanism that allows bridges and end stations to register or un-register Group membership information dynamically.

**GMRP Settings**

Port

Enable GMRP  P1  P2  P3  P4  P5  P6  P7  P8  G1  G2

Apply

**GMRP Status**

MAC Address	Static Port	Learned Port
-------------	-------------	--------------

## Enable GMRP

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to define which ports are to be GMRP enabled.	None

## GMRP Status

The Moxa switch displays the current active GMRP groups that were detected.

**MAC Address:** The Multicast MAC address

**Static Port:** This multicast address is defined by static multicast

**Learned Port:** This multicast address is learned by GMRP

# QoS

The Moxa switch's traffic prioritization capability provides Quality of Service (QoS) to your network by making data delivery more reliable. You can prioritize traffic on your network to ensure that high priority data is transmitted with minimum delay. Traffic can be controlled by a set of rules to obtain the required Quality of Service for your network. The rules define different types of traffic and specify how each type should be treated as it passes through the switch. The Moxa switch can inspect both IEEE 802.1p/1Q layer 2 CoS tags, and even layer 3 TOS information to provide consistent classification of the entire network. The Moxa switch's QoS capability improves the performance and determinism of industrial networks for mission-critical applications.

## The Traffic Prioritization Concept

Traffic prioritization allows you to prioritize data so that time-sensitive and system-critical data can be transferred smoothly and with minimal delay over a network. The benefits of using traffic prioritization are:

- Improve network performance by controlling a wide variety of traffic and by managing congestion.
- Assign priorities to different categories of traffic. For example, set higher priorities for time-critical or business-critical applications.
- Provide predictable throughput for multimedia applications, such as video conferencing or voice over IP, and minimize traffic delay and jitter.
- Improve network performance as the amount of traffic grows. Doing so will reduce costs since it will not be necessary to keep adding bandwidth to the network.

Traffic prioritization uses the four traffic queues that are present in your Moxa switch to ensure that high priority traffic is forwarded on a different queue from lower priority traffic. Traffic prioritization provides Quality of Service (QoS) to your network.

Moxa switch traffic prioritization depends on two industry-standard methods:

- *IEEE 802.1D*—a layer 2 marking scheme.
- *Differentiated Services (DiffServ)*—a layer 3 marking scheme.

### IEEE 802.1D Traffic Marking

The IEEE Std 802.1D, 1998 Edition marking scheme, which is an enhancement to IEEE Std 802.1D, enables Quality of Service on the LAN. Traffic service levels are defined in the IEEE 802.1Q 4-byte tag, which is used to carry VLAN identification as well as IEEE 802.1p priority information. The 4-byte tag immediately follows the destination MAC address and Source MAC address.

The IEEE Std 802.1D, 1998 Edition priority marking scheme assigns an IEEE 802.1p priority level between 0 and 7 to each frame. The priority marking scheme determines the level of service that this type of traffic should receive. Refer to the table below for an example of how different traffic types can be mapped to the eight IEEE 802.1p priority levels.

IEEE 802.1p Priority Level	IEEE 802.1D Traffic Type
0	Best Effort (default)
1	Background
2	Standard (spare)
3	Excellent Effort (business critical)
4	Controlled Load (streaming multimedia)
5	Video (interactive media); less than 100 milliseconds of latency and jitter
6	Voice (interactive voice); less than 10 milliseconds of latency and jitter
7	Network Control Reserved traffic

Even though the IEEE 802.1D standard is the most widely used prioritization scheme for LAN environments, it still has some restrictions:

- It requires an additional 4-byte tag in the frame, which is normally optional for Ethernet networks. Without this tag, the scheme cannot work.
- The tag is part of the IEEE 802.1Q header, so to implement QoS at layer 2, the entire network must implement IEEE 802.1Q VLAN tagging.
- It is only supported on a LAN and not across routed WAN links, since the IEEE 802.1Q tags are removed when the packets pass through a router.

### Differentiated Services (DiffServ) Traffic Marking

DiffServ is a Layer 3 marking scheme that uses the DiffServ Code Point (DSCP) field in the IP header to store the packet priority information. DSCP is an advanced intelligent method of traffic marking that allows you to choose how your network prioritizes different types of traffic. DSCP uses 64 values that map to user-defined service levels, allowing you to establish more control over network traffic.

The advantages of DiffServ over IEEE 802.1D are:

- You can configure how you want your switch to treat selected applications and types of traffic by assigning various grades of network service to them.
- No extra tags are required in the packet.
- DSCP uses the IP header of a packet to preserve priority across the Internet.
- DSCP is backwards compatible with IPV4 TOS, which allows operation with existing devices that use a layer 3 TOS enabled prioritization scheme.

## Traffic Prioritization

Moxa switches classify traffic based on layer 2 of the OSI 7 layer model, and the switch prioritizes received traffic according to the priority information defined in the received packet. Incoming traffic is classified based upon the IEEE 802.1D frame and is assigned to the appropriate priority queue based on the IEEE 802.1p service level value defined in that packet. Service level markings (values) are defined in the IEEE 802.1Q 4-byte tag, and consequently traffic will only contain 802.1p priority markings if the network is configured with VLANs and VLAN tagging. The traffic flow through the switch is as follows:

- A packet received by the Moxa switch may or may not have an 802.1p tag associated with it. If it does not, then it is given a default 802.1p tag (which is usually 0). Alternatively, the packet may be marked with a new 802.1p value, which will result in all knowledge of the old 802.1p tag being lost.
- Because the 802.1p priority levels are fixed to the traffic queues, the packet will be placed in the appropriate priority queue, ready for transmission through the appropriate egress port. When the packet reaches the head of its queue and is about to be transmitted, the device determines whether or not the egress port is tagged for that VLAN. If it is, then the new 802.1p tag is used in the extended 802.1D header.
- The Moxa switch will check a packet received at the ingress port for IEEE 802.1D traffic classification, and then prioritize it based on the IEEE 802.1p value (service levels) in that tag. It is this 802.1p value that determines which traffic queue the packet is mapped to.

## Traffic Queues

The hardware of Moxa switches has multiple traffic queues that allow packet prioritization to occur. Higher priority traffic can pass through the Moxa switch without being delayed by lower priority traffic. As each packet arrives in the Moxa switch, it passes through any ingress processing (which includes classification, marking/re-marking), and is then sorted into the appropriate queue. The switch then forwards packets from each queue.

Moxa switches support two different queuing mechanisms:

- **Weight Fair:** This method services all the traffic queues, giving priority to the higher priority queues. Under most circumstances, the Weight Fair method gives high priority precedence over low priority, but in the event that high priority traffic does not reach the link capacity, lower priority traffic is not blocked.
- **Strict:** This method services high traffic queues first; low priority queues are delayed until no more high priority data needs to be sent. The Strict method always gives precedence to high priority over low priority.

# Configuring Traffic Prioritization

Quality of Service (QoS) provides a traffic prioritization capability to ensure that important data is delivered consistently and predictably. The Moxa switch can inspect IEEE 802.1p/1Q layer 2 CoS tags, and even layer 3 TOS information, to provide a consistent classification of the entire network. The Moxa switch's QoS capability improves your industrial network's performance and determinism for mission critical applications.

## CoS Classification

**QoS Classification**

**Egress Scheduling Setting**

Scheduling Mechanism: Weight Fair(8:4:2:1)

**Ingress Classification Setting**

Port	ToS/DSCP Inspection	CoS Inspection	Priority
1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
8	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
9	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3
10	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3

Apply

### Scheduling Mechanism

Setting	Description	Factory Default
Weight Fair	The Moxa switch has 4 priority queues. In the weight fair scheme, an 8, 4, 2, 1 weighting is applied to the four priorities. This approach prevents the lower priority frames from being starved of opportunity for transmission with only a slight delay to the higher priority frames	Weight Fair
Strict	In the Strict-priority scheme, all top-priority frames egress a port until that priority's frames egress. This approach can cause the lower priorities to be starved of opportunity for transmitting frames but ensures that all high priority frames will egress the switch as soon as possible.	

### TOS/DSCP Inspection

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch for inspecting Type of Server (TOS) bits in the IPV4 frame to determine the priority of each frame.	Enable

### COS Inspection

Setting	Description	Factory Default
Enable/Disable	Enables or disables the Moxa switch for inspecting 802.1p COS tags in the MAC frame to determine the priority of each frame.	Enable

### Priority

Setting	Description	Factory Default
0 to 7	The port priority has 8 priority queues: from 0 (lowest) to 7 (highest)	3



### NOTE

The priority of an ingress frame is determined in the following order:

1. ToS/DSCP Inspection
2. CoS Inspection
3. Priority



### NOTE

The designer can enable these classifications individually or in combination. For instance, if a “hot” higher priority port is required for a network design, **TOS/DSCP Inspection** and **Cos Inspection** can be disabled. This setting leaves only port default priority active, which results in all ingress frames being assigned the same priority on that port.

## Priority Mapping

### Priority Mapping

CoS Priority	Queue
0	0 ▼
1	0 ▼
2	1 ▼
3	1 ▼
4	2 ▼
5	2 ▼
6	3 ▼
7	3 ▼

[Apply](#)

### CoS Priority and Queues

Setting	Description	Factory Default
0 to 3	Maps different CoS values to 4 different egress queues.	CoS 0, 1: 0 CoS 2, 3: 1 CoS 4, 5: 2 CoS 6, 7: 3

# DSCP Mapping

**DSCP Mapping**

DSCP	Priority	DSCP	Priority	DSCP	Priority	DSCP	Priority
0	0 ▼	1	0 ▼	2	0 ▼	3	0 ▼
4	0 ▼	5	0 ▼	6	0 ▼	7	0 ▼
8	1 ▼	9	1 ▼	10	1 ▼	11	1 ▼
12	1 ▼	13	1 ▼	14	1 ▼	15	1 ▼
16	2 ▼	17	2 ▼	18	2 ▼	19	2 ▼
20	2 ▼	21	2 ▼	22	2 ▼	23	2 ▼
24	3 ▼	25	3 ▼	26	3 ▼	27	3 ▼
28	3 ▼	29	3 ▼	30	3 ▼	31	3 ▼
32	4 ▼	33	4 ▼	34	4 ▼	35	4 ▼
36	4 ▼	37	4 ▼	38	4 ▼	39	4 ▼

**Apply**

### DSCP Value and Priority

Setting	Description	Factory Default
0 to 7	Different DSCP values map to one of 8 different priorities.	0
8 to 15		1
16 to 23		2
24 to 31		3
32 to 39		4
40 to 47		5
48 to 55		6
56 to 63		7

# Rate Limiting

In general, one host should not be allowed to occupy unlimited bandwidth, particularly when the device malfunctions. For example, so-called “broadcast storms” could be caused by an incorrectly configured topology, or a malfunctioning device. Moxa industrial Ethernet switches supports to be configured to a different ingress rate for all packets, giving administrators full control of their limited bandwidth to prevent undesirable effects caused by unpredictable faults.

The **Control Mode** setting on the **Rate Limiting** page can be set to **Normal** or **Port Disable**.

### Control Mode

Setting	Description	Factory Default
Normal	Set the max. ingress rate limit for different packet types	Normal
Port Disable	When the ingress multicast and broadcast packets exceed the ingress rate limit, the port will be disabled for a certain period. During this period, all packets from this port will be discarded.	

## Rate Limiting: Normal

### Ingress Rate Limit

**Rate Limiting**

Control Mode:

Port	Policy	Ingress Priority Queue Rate			
		Low	Normal	Medium	High
1	Limit All	8M	8M	8M	8M
2	Limit Broadcast	8M	8M	8M	8M
3	Limit Broadcast	8M	8M	8M	8M
4	Limit Broadcast	8M	8M	8M	8M
5	Limit Broadcast	8M	8M	8M	8M
6	Limit Broadcast	8M	8M	8M	8M
7	Limit Broadcast	8M	8M	8M	8M

Policy	Description	Factory Default
Limit All	Select the ingress rate limit for different packet types from the following options: Unlimited, 128K, 256K, 512K, 1M, 2M, 4M, 8M	Limit Broadcast 8M
Limit Broadcast, Multicast, Flooded Unicast		
Limit Broadcast, Multicast		
Limit Broadcast		

### Egress Rate Limit

Port	Egress Rate
1	Unlimited
2	Unlimited
3	Unlimited
4	Unlimited
5	Unlimited
6	Unlimited
7	Unlimited

Setting	Description	Factory Default
Egress rate (% of max. throughput)	Select the egress rate limit (% of max. throughput) for all packets from the following options: Not Limited, 3%, 5%, 10%, 15%, 25%, 35%, 50%, 65%, 85%	Unlimited

## Rate Limiting: Port Disable

### Rate Limiting

Control Mode Port Disable ▾

Port Disable Duration (1~65535s)

Port	Ingress(fps of multicast and broadcast packets.)
4	Unlimited ▾
6	Unlimited ▾
7	Unlimited ▾
G1	Unlimited ▾
G2	Unlimited ▾
G3	Unlimited ▾

Setting	Description	Factory Default
Port disable duration (1-65535 seconds)	When the ingress multicast and broadcast packets exceed the ingress rate limit, the port will be disabled for this period of time. During this time, all packets from this port will be discarded.	30 seconds
Ingress (frames per second)	Select the ingress rate (fps) limit for all packets from the following options: Not Limited, 4464, 7441, 14881, 22322, 37203, 52084, 74405	Unlimited



### NOTE

The **Rate Limiting** function is for broadcast packets only.

## Security

Security can be categorized into two levels: the user name/password level, and the port access level. Moxa switches provide many kinds of security functions, including Management Interface, Trusted Access, SSL/SSH Authentication certificate, Login Authentication, IEEE 802.1X, MAC Authentication Bypass, Port Security, Loop Protection, and Access Control List.

## Management Interface

### Management Interface

<input checked="" type="checkbox"/> Enable HTTP	TCP Port	<input type="text" value="80"/>	
<input checked="" type="checkbox"/> Enable HTTPS	TCP Port	<input type="text" value="443"/>	
<input checked="" type="checkbox"/> Enable Telnet	TCP Port	<input type="text" value="23"/>	
<input checked="" type="checkbox"/> Enable SSH	TCP Port	<input type="text" value="22"/>	
<input type="checkbox"/> Enable SNMP	UDP Port	<input type="text" value="161"/>	
<input checked="" type="checkbox"/> Enable Moxa Service	TCP Port	<input type="text" value="4000"/>	UDP Port <input type="text" value="4000"/>
<input checked="" type="checkbox"/> Enable Moxa Service(Encrypted)	TCP Port	<input type="text" value="443"/>	UDP Port <input type="text" value="40404"/>
Max. No. of Login Users For HTTP+HTTPS	<input type="text" value="5"/>		(1~10)
Max. No. of Login Users For Telnet+SSH	<input type="text" value="1"/>		(1~5)
Auto Logout Setting (min)	<input type="text" value="5"/>		(0~1440; 0 for Disable)

**Enable HTTP**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable HTTP.	TCP Port: 80

**Enable HTTPS**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable HTTPS.	TCP Port: 443

**Enable Telnet**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable Telnet.	TCP Port: 23

**Enable SSH**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable SSH.	TCP Port: 22

**Enable SNMP**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable SNMP.	UDP Port: 161

**Enable Moxa Service**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable Moxa Service. NOTE: Moxa Service is only for Moxa network management software suite.	TCP Port: 4000 UDP Port: 4000

**Enable Moxa Service (Encrypted)**

Setting	Description	Factory Default
Select/Deselect	Select the appropriate checkboxes to enable Moxa Service (Encrypted). NOTE: Moxa Service (Encrypted) is only for Moxa network management software suite.	TCP Port: 443 UDP Port: 40404

**Maximum Login Users for HTTP+HTTPS**

Setting	Description	Factory Default
Integer (1 to 10)	Sets the maximum number of login users for HTTP and HTTPS	5

**Maximum Login Users for Telnet+SSH**

Setting	Description	Factory Default
Integer (1 to 5)	Sets the maximum number of login users for Telnet and SSH	1

**Auto Logout Setting (min)**

Setting	Description	Factory Default
Integer (0 to 1440)	Sets the web auto logout period. (Enter 0 to disable this function.)	5

**NOTE**

The SNMP function is turned off by default. When using management software, the SNMP function should be manually turned on. Otherwise, the management software will not be able to detect the switch and access any data.

# Trusted Access

The Moxa switch uses an IP address-based filtering method to control access.

You may add or remove IP addresses to limit access to the Moxa switch. When the Trusted Access list is enabled, only addresses on the list will be allowed access to the Moxa switch. Each IP address and netmask entry can be tailored for different situations:

- Grant access to one host with a specific IP address**  
 For example, enter IP address 192.168.1.1 with netmask 255.255.255.255 to allow access to 192.168.1.1 only.
- Grant access to any host on a specific subnetwork**  
 For example, enter IP address 192.168.1.0 with netmask 255.255.255.0 to allow access to all IPs on the subnet defined by this IP address/subnet mask combination.
- Grant access to all hosts**  
 Make sure the Trusted Access list is not enabled by removing the checkmark from Enable trusted access.

The following table shows additional configuration examples:

Hosts That Need Access	Input Format
Any host	Disable
192.168.1.120	192.168.1.120 / 255.255.255.255
192.168.1.1 to 192.168.1.254	192.168.1.0 / 255.255.255.0
192.168.0.1 to 192.168.255.254	192.168.0.0 / 255.255.0.0
192.168.1.1 to 192.168.1.126	192.168.1.0 / 255.255.255.128
192.168.1.129 to 192.168.1.254	192.168.1.128 / 255.255.255.128

# SSL Certificate Management

## SSL Certificate Management

CA Name	Expiry Date
Moxa Networking Co., Ltd.	Nov 12 08:18:23 2032 GMT

**Certificate Import**

PKCS#12 Upload  **Browse**

Import Password  **Import**

**Certificate Re-generate**

Re-generate **Apply**

### Certificate Import

1. Click **Browse** and select Public-Key Cryptography Standard (PKCS) #12 certificate file
2. Enter the **Import Password** and click **Import**
3. The SSL certificate is updated

### Regenerate SSL Certificate

Setting	Description	Factory Default
Select/Deselect	Enable the SSL Certificate Regeneration	Deselect

# SSH Key Management

## SSH Key Management

**SSH Key**

Re-generate

Note: Few minutes may be required. Web will be unavailable temporarily until it finish.

**Apply**

### SSH Key Re-generate

Setting	Description	Factory Default
Select/Deselect	Enable SSH Key Re-generate	Deselect

# Authentication

## Login Authentication

Moxa switches provide three different user login authentications: TACACS+ (Terminal Access Controller Access-Control System Plus), RADIUS (Remote Authentication Dial In User Service), and Local. The TACACS+ and RADIUS mechanisms are centralized "AAA" (Authentication, Authorization and Accounting) systems for connecting to network services. The fundamental purpose of both TACACS+ and RADIUS is to provide an efficient and secure mechanism for user account management.

There are five combinations for users:

1. **TACACS+, Local:** Check TACACS+ database first. If the TACACS+ server is not reachable, then the switch will check the local database.
2. **RADIUS, Local:** Check RADIUS database first. If the RADIUS server is not reachable, then the switch will check the local database.
3. **TACACS+:** Only check TACACS+ database
4. **RADIUS:** Only check the RADIUS database
5. **Local:** Only check the Local database

### •• Login Authentication

Authentication Protocol:

Server IP/Name:

TCP Port:

Shared Key:

Authentication Type:

Timeout (sec):

[Apply](#)

### •• Login Authentication

Authentication Protocol:

Server IP/Name:

UDP Port:

Shared Key:

Authentication Type:

Timeout (sec):

[Apply](#)

### •• Login Authentication

Authentication Protocol:

[Apply](#)

Setting	Description	Factory Default
Authentication Protocol	Authentication protocol selection.	Local
Server IP/Name	Sets the IP address of an external TACACS+/RADIUS server as the authentication database.	None
TCP/UDP Port	Sets the communication port of an external TACACS+/RADIUS server as the authentication database.	TACACS+: 49 RADIUS: 1812
Shared Key	Sets specific characters for server authentication verification.	None
Authentication Type	Authentication mechanism selection. ASCII, PAP, CHAP, and MSCHAP are for TACACS+; PAP, CHAP, and MSCHAPv2 are for RADIUS.	ASCII for TACACS+ PAP for RADIUS
Timeout (sec)	The timeout period for waiting for a server response.	3



## NOTE

The account privilege level is authorized under service type settings in RADIUS, and the privilege level is under TACACS+.

RADIUS Server

- RADIUS Service type = 6 = read/write = administrator
- RADIUS Service type = 1 = read only = user

TACACS+ Server

- TACACS+ privilege level= 15 = read/write = administrator
- TACACS+ privilege level= 1 to 14 = read only = user



## NOTE

When switching to a different login authentication method, the original shared key setting of RADIUS and TACACS+ will be cleared. Therefore, when setting the RADIUS and TACACS+ login authentication method, users must enter the shared key setting again.

## IEEE 802.1X Settings

The IEEE 802.1X standard defines a protocol for client/server-based access control and authentication. The protocol restricts unauthorized clients from connecting to a LAN through ports that are open to the Internet, and which otherwise would be readily accessible. The purpose of the authentication server is to check each client that requests access to the port. The client is only allowed access to the port if the client's permission is authenticated.

Three components are used to create an authentication mechanism based on 802.1X standards: Client/Supplicant, Authentication Server, and Authenticator.

**Client/Supplicant:** The end station that requests access to the LAN and switch services and responds to the requests from the switch.

**Authentication Server:** The server that performs the actual authentication of the supplicant.

**Authenticator:** Edge switch or wireless access point that acts as a proxy between the supplicant and the authentication server, requesting identity information from the supplicant, verifying the information with the authentication server, and relaying a response to the supplicant.

The Moxa switch acts as an authenticator in the 802.1X environment. A supplicant and an authenticator exchange EAPOL (Extensible Authentication Protocol over LAN) frames with each other. We can either use an external RADIUS server as the authentication server, or implement the authentication server in the Moxa switch by using a Local User Database as the authentication look-up table. When we use an external RADIUS server as the authentication server, the authenticator and the authentication server exchange EAP frames.

Authentication can be initiated either by the supplicant or the authenticator. When the supplicant initiates the authentication process, it sends an **EAPOL-Start** frame to the authenticator. When the authenticator initiates the authentication process or when it receives an **EAPOL Start** frame, it sends an **EAP Request/Identity** frame to ask for the username of the supplicant.

**IEEE 802.1X Settings**

Authentication Protocol: 802.1X Local ▼  
 Re-Auth: Enable ▼  
 Re-Auth Period (sec): 3600

Port	Enable 802.1X	Re-Auth
1	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="checkbox"/>	<input type="checkbox"/>
6	<input type="checkbox"/>	<input type="checkbox"/>
7	<input type="checkbox"/>	<input type="checkbox"/>

**Apply**

**Authentication Protocol**

Setting	Description	Factory Default
802.1X Local (Max. of 32 users)	Select this option when setting the 802.1X Local User Database as the authentication database.	802.1X Local
RADIUS	Select this option to set an external RADIUS server as the authentication database. The authentication mechanism includes EAP-TLS, and PEAP-MSCHAPv2.	
RADIUS, 802.1X Local	Select this option to make using an external RADIUS server as the authentication database the first priority. The authentication mechanism is EAP-MD5. The second priority is to set the 802.1X Local User Database as the authentication database.	

**Re-Auth (Global)**

Setting	Description	Factory Default
Enable/Disable	Select enable to require re-authentication of the client after a preset time period of no activity has elapsed.	Enable

**Re-Auth Period (sec)**

Setting	Description	Factory Default
60 to 65535	Sets the Re-Auth period	3600

**Enable 802.1X**

Setting	Description	Factory Default
Select/Deselect	Select the checkbox under the 802.1X column to enable IEEE 802.1X for one or more ports. All end stations must enter usernames and passwords before access to these ports is allowed.	Deselect

**Re-Auth**

Setting	Description	Factory Default
Select/Deselect	Select enable to require re-authentication of the client by port	Deselect

## IEEE 802.1X Local Database

When selecting the 802.1X Local as the authentication protocol, set the IEEE 802.1X Local Database first.

### IEEE 802.1X Local Database

User Name

Password

Confirm Password

Description

All	User Name	Password	Description

### IEEE 802.1X Local Database Setup

Setting	Description	Factory Default
User Name (Max. of 30 characters)	User Name for the Local User Database	None
Password (Max. of 16 characters)	Password for the Local User Database. Input the MAC address without ":", while using MAC Authentication Bypass with the Local database.	None
Confirm Password (Max. of 16 characters)	Confirm Password for the Local User Database. Input the MAC address without ":", while using MAC Authentication Bypass with the Local database.	None
Description (Max. of 30 characters)	Description for the Local User Database	None



### NOTE

The user name for the IEEE 802.1X Local Database is not case sensitive.

## RADIUS Server Settings

### RADIUS Server Settings

Apply Login Authentication Settings

1<sup>st</sup> Server IP/Name

UDP Port

Shared Key

2<sup>nd</sup> Server IP/Name

UDP Port

Shared Key

### Apply Login Authentication Setting

Setting	Description	Factory Default
Select/Deselect	Enables using the same setting as Auth Server.	Deselect

### Server Setting

Setting	Description	Factory Default
Server IP/Name	Specifies the IP/name of the server	None
Server Port	Specifies the port of the server	1812
Server Shared Key	Specifies the shared key of the server	None

## Port Security

Moxa switches provide a Port Security function that lets packets with allowed MAC Addresses access the switch's ports. Two Port Security modes are supported: **Static Port Lock** and **MAC Address Sticky**.

**Static Port Lock:** Allows users to configure specific MAC addresses that are allowed to access the port.

**MAC Address Sticky:** Allows users to configure the maximum number of MAC addresses (the Limit) that a port can "learn." Users can configure what action should be taken (under Violation Port Disable) when a new MAC address tries to access a port after the maximum number of MAC addresses have already been learned. The total number of allowed MAC addresses cannot exceed 1024.

## Port Security Mode

### Port Security Mode

Port	Mode	Limit	Disable Port upon Violation
P1	---	1	Disabled ▾
P2	---	1	Disabled ▾
P3	---	1	Disabled ▾
P4	---	1	Disabled ▾
P5	---	1	Disabled ▾
P6	---	1	Disabled ▾
P7	---	1	Disabled ▾
P8	---	1	Disabled ▾
G1	---	1	Disabled ▾
G2	---	1	Disabled ▾

**Mode**

Setting	Description	Factory Default
Static Port Lock	The switch will block unauthorized MAC addresses and allow access to packets with a MAC address defined in the Static Unicast MAC Address Table.	None
MAC Address Sticky	If Limit is set to n, the switch will learn the first n MAC addresses that access the port, and automatically store them in the MAC Address Control Table.	

**Limit (only active for MAC Address Sticky)**

Setting	Description	Factory Default
1 to 1024	The maximum number of learned MAC addresses allowed for that port.	1

**Violation Port Disable (only active for MAC Address Sticky)**

Setting	Description	Factory Default
Disable	When the port limit is reached and the port receives a packet with an unknown MAC address (unlearned by the port), the packet will be discarded.	Disable
Enable	When the port limit is reached and the port receives a packet with an unknown MAC address (unlearned by the port), the port will be disabled.	

**Static Port Lock**

### Static Port Lock

**Add Static Unicast MAC Address**

Port

VID

MAC Address  -  -  -  -  -

**Static Unicast MAC Address Table**

Port

All	Mac Address	Vid	Type

**Port Number**

Setting	Description	Factory Default
Port Number	Associates the static address to a dedicated port	None

**VID**

Setting	Description	Factory Default
VLAN ID	Associates the static address to a dedicated VLAN on the port	None

**MAC Address**

Setting	Description	Factory Default
MAC Address	Adds the static unicast MAC address into the address table	None

## MAC Address Sticky

### MAC Address Sticky

**Add Static Unicast MAC Address**

Port

VID

MAC Address  -  -  -  -  -

**MAC Access Control Table**

Port

Number: 0

Total/MAX: 0/1024

All	Index	MAC Address	VID	Status
-----	-------	-------------	-----	--------

**Port Number**

Setting	Description	Factory Default
Port Number	Associates the static address to a dedicated port	None

**VID**

Setting	Description	Factory Default
VLAN ID	Associates the static address to a dedicated VLAN on the port	None

### MAC Address

Setting	Description	Factory Default
MAC Address	Adds the static unicast MAC address into the address table	None

## Port Access Control Table

### Port Access Control Table

Port

Total Entries:0

All	MAC Address	Status
-----	-------------	--------

The port status will be indicated as **authorized** or **unauthorized**.

## Loop Protection

The switch is designed with a loop checking mechanism whereby it sends a control BPDU from the Ethernet port and check if this control PBDU will be sent back to the switch again. If the looping occurs, the switch will automatically block the Ethernet port to prevent looping.

### Loop Protection

Enable

### Enable Loop Protection

Setting	Description	Factory Default
Enable	Select the Enable checkbox to enable the loop protection function.	Disable
Disable	Deselect the Enable checkbox to disable the loop protection function.	

# DHCP

## IP-Port Binding

With IP-Port Binding, the Moxa switch will act as a server that always assigns the same IP address to any device that connects to a specific port, even if the device is replaced with another. Each port can only designate an IP address to one device at a time. If there are several devices connecting to the same port, the IP address will be assigned to the device whose request was received first by the server while the other devices connecting to the port will retain their original IP address.

After the device is assigned the specific IP address, the subnet mask of the device will automatically be changed to the default value 255.255.255.0. Please make sure that before configuring IP-Port Binding settings, the Moxa switch and the connected device are configured to be in VLAN(s) that are able to communicate with each other, otherwise the system will be unable to designate the IP address.

To configure IP-Port Binding entries, do the following:

1. In the Designated IP Address field, enter the IP address that will be assigned to the device connecting to the corresponding port.
2. Click **Apply**.
3. Configure the connected device to receive its IP address through DHCP.
4. Connect the device to the Moxa switch.

If successful, the IP address of the connected device will be shown in the Current IP Address field.

### IP-Port Binding

Port	Current IP Address	Designated IP Address
P1	NA	<input type="text"/>
P2	NA	<input type="text"/>
P3	NA	<input type="text"/>
P4	NA	<input type="text"/>
P5	NA	<input type="text"/>
P6	NA	<input type="text"/>
P7	NA	<input type="text"/>
P8	NA	<input type="text"/>
G1	NA	<input type="text"/>
G2	NA	<input type="text"/>

### Designated IP Address

Setting	Description	Factory Default
IP Address	Set the desired IP of connected devices.	None

# DHCP Relay Agent

The DHCP Relay Agent makes it possible for DHCP broadcast messages to be sent over routers. The DHCP Relay Agent enables DHCP clients to obtain IP addresses from a DHCP server on a remote subnet, or those that are not located on the local subnet.

## DHCP Relay Agent (Option 82)

Option 82 is used by the relay agent to insert additional information into the client's DHCP request. The Relay Agent Information option is inserted by the DHCP relay agent when forwarding client-originated DHCP packets to a DHCP server. Servers can recognize the Relay Agent Information option and use the information to implement IP addresses to Clients.

When Option 82 is enabled on the switch, a subscriber device is identified by the switch port through which it connects to the network (in addition to its MAC address). Multiple hosts on the subscriber LAN can be connected to the same port on the access switch and are uniquely identified.

The Option 82 information contains 2 sub-options, Circuit ID and Remote ID, which define the relationship between the end device IP and the DHCP Option 82 server. The **Circuit ID** is a 4-byte number generated by the Ethernet switch—a combination of physical port number and VLAN ID. The format of the **Circuit ID** is shown below:

### FF-VV-VV-PP

This is where the first byte "FF" is fixed to "01", the second and the third byte "VV-VV" is formed by the port VLAN ID in hex, and the last byte "PP" is formed by the port number in hex. For example:

01-00-0F-03 is the "Circuit ID" of port number 3 with port VLAN ID 15.

The "Remote ID" identifies the relay agent itself and can be one of the following:

1. The IP address of the relay agent.
2. The MAC address of the relay agent.
3. A combination of IP address and MAC address of the relay agent.
4. A user-defined string.

### DHCP Relay Agent

1st Server

2nd Server

3rd Server

4th Server

Enable Option 82

Assign Remote-ID by

Remote-ID

Port	Circuit-ID	Option 82
1	01000101	<input type="checkbox"/> Enable
2	01000102	<input type="checkbox"/> Enable
3	01000103	<input type="checkbox"/> Enable
4	01000104	<input type="checkbox"/> Enable
5	01000105	<input type="checkbox"/> Enable
6	01000106	<input type="checkbox"/> Enable
7	01000107	<input type="checkbox"/> Enable

## Server IP Address

### 1st Server

Setting	Description	Factory Default
IP address for the 1st DHCP server	Assigns the IP address of the 1st DHCP server that the switch tries to access.	None

### 2nd Server

Setting	Description	Factory Default
IP address for the 2nd DHCP server	Assigns the IP address of the 2nd DHCP server that the switch tries to access.	None

### 3rd Server

Setting	Description	Factory Default
IP address for the 3rd DHCP server	Assigns the IP address of the 3rd DHCP server that the switch tries to access.	None

### 4th Server

Setting	Description	Factory Default
IP address for the 4th DHCP server	Assigns the IP address of the 4th DHCP server that the switch tries to access.	None

## DHCP Option 82

### Enable Option 82

Setting	Description	Factory Default
Enable or Disable	Enable or disable the DHCP Option 82 function.	Disable

### Assign Remote-ID by

Setting	Description	Factory Default
IP	Uses the switch's IP address as the remote ID sub.	IP
MAC	Uses the switch's MAC address as the remote ID sub.	IP
Client-ID	Uses a combination of the switch's MAC address and IP address as the remote ID sub.	IP
Other	Uses the user-designated ID sub.	IP

### Value

Setting	Description	Factory Default
Max. of 12 characters	Displays the value that was set. Complete this field if type is set to Other.	Switch IP address

### Remote-ID

Setting	Description	Factory Default
read-only	The actual hexadecimal value configured in the DHCP server for the Remote-ID. This value is automatically generated according to the Value field. Users cannot modify it.	COA87FFD

## DHCP Function Table

### Enable

Setting	Description	Factory Default
Enable or Disable	Enable or disable the DHCP Option 82 function for this port.	Disable

# SNMP

The Moxa switch supports SNMP V1, V2c, and V3. SNMP V1 and SNMP V2c use a community string match for authentication, which means that SNMP servers access all objects with read-only or read/write permissions using the community strings public and private by default. SNMP V3 requires that you select an authentication level of MD5 or SHA, and is the most secure protocol. You can also enable data encryption to enhance data security.

Supported SNMP security modes and levels are shown in the following table. Select the security mode and level that will be used to communicate between the SNMP agent and manager.

Protocol Version	UI Setting	Authentication	Encryption	Method
SNMP V1, V2c	V1, V2c Read Community	Community string	No	Uses a community string match for authentication.
	V1, V2c Write/Read Community	Community string	No	Uses a community string match for authentication.
SNMP V3	No-Auth	No	No	Uses an account with admin or user to access objects
	MD5 or SHA	Authentication based on MD5 or SHA	No	Provides authentication based on HMAC-MD5, or HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.
	MD5 or SHA	Authentication based on MD5 or SHA	DES or AES Data encryption key	Provides authentication based on HMAC-MD5 or HMAC-SHA algorithms, and DES or AES data encryption key. 8-character passwords and a data encryption key are the minimum requirements for authentication .and encryption.



## NOTE

The username and password of SNMP V3 are the same as the username and password of User Account. Accounts with admin privilege have read/write access to all configuration parameters. Accounts with user authority only have read access to configuration parameters.



## NOTE

When changing the SNMP version, the settings of the data encryption key will be cleared. Therefore, when changing to v3 settings, the data encryption key should be entered again.

These parameters are configured on the SNMP page. A more detailed explanation of each parameter is given below the figure.

The screenshot shows the SNMP configuration interface with the following settings:

- SNMP Versions:** V1, V2c
- Admin Auth. Type:** No-Auth
- Encrypt. Type (Admin):** No-Encrypt
- Data Encryption Key (Admin):** [Empty field]
- User Auth. Type:** No-Auth
- Encrypt. Type (User):** No-Encrypt
- Data Encryption Key (User):** [Empty field]
- Community:**
  - V1,V2c Read Community: public
  - V1,V2c Write/Read Community: private
- Trap/Inform Recipient:**
  - Mode: Trap V1
  - Host IP Address 1: [Empty field]
  - 1st Trap Community: public
  - Host IP Address 2: [Empty field]
  - 2nd Trap Community: public

An **Apply** button is located at the bottom right of the configuration area.

## SNMP Read/Write Settings

### SNMP Versions

Setting	Description	Factory Default
V1, V2c, V3, or V1, V2c, or V3 only	Specifies the SNMP protocol version used to manage the switch.	V1, V2c

### V1, V2c Read Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to authenticate the SNMP agent for read-only access. The SNMP agent will access all objects with read-only permissions using this community string.	Public

### V1, V2c Write/Read Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to authenticate the SNMP agent for read/write access. The SNMP server will access all objects with read/write permissions using this community string.	Private

For SNMP V3, two levels of privilege are available for accessing the Moxa switch. **Admin** privilege provides access and authorization to read and write the MIB file. **User** privilege only allows reading the MIB file.

### Admin Auth. Type (for SNMP V1, V2c, V3, and V3 only)

Setting	Description	Factory Default
No-Auth	Allows the admin account to access objects without authentication.	No
MD5-Auth	Authentication will be based on the HMAC-MD5 algorithms. 8-character passwords are the minimum requirement for authentication.	No
SHA-Auth	Authentication will be based on the HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.	No

**Enable Admin Data Encryption Key (for SNMP V1, V2c, V3, and V3 only)**

Setting	Description	Factory Default
Enable	Enables data encryption (via the DES algorithm) using the specified data encryption key (between 8 and 30 characters).	No
Disable	Specifies that data will not be encrypted.	No

**User Auth. Type (for SNMP V1, V2c, V3 and V3 only)**

Setting	Description	Factory Default
No-Auth	Allows the admin account and user account to access objects without authentication.	No
MD5-Auth	Authentication will be based on the HMAC-MD5 algorithms. 8-character passwords are the minimum requirement for authentication.	No
SHA-Auth	Authentication will be based on the HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.	No

**Enable User Data Encryption Key (for SNMP V1, V2c, V3 and V3 only)**

Setting	Description	Factory Default
Enable	Enables data encryption using the specified data encryption key (between 8 and 30 characters).	No
Disable	No data encryption	No

## Trap Settings

SNMP traps allow an SNMP agent to notify the NMS of a significant event. The switch supports two SNMP modes: Trap mode and Inform mode.

### SNMP Trap Mode—Trap

In Trap mode, the SNMP agent sends an SNMP trap PDU to the NMS. No acknowledgment is sent back from the NMS so the agent has no way of knowing if the trap reached the NMS.

**SNMP Trap V1, Trap V2c**

Trap/Inform Recipient	
Mode	Trap V1
Host IP Address 1	
1st Trap Community	public
Host IP Address 2	
2nd Trap Community	public

Trap/Inform Recipient	
Mode	Trap V2c
Host IP Address 1	
1st Trap Community	public
Host IP Address 2	
2nd Trap Community	public

**Host IP Address 1**

Setting	Description	Factory Default
IP or name	Specifies the IP address or name of the primary trap server used by your network.	None

### 1st Trap Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to use for authentication.	Public

### Host IP Address 2

Setting	Description	Factory Default
IP or name	Specifies the IP address or name of the secondary trap server used by your network.	None

### 2nd Trap Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to use for authentication.	Public

## SNMP Trap V3

**Trap/Inform Recipient**

Mode

User Name

Auth. Type

Auth. Password

Enable Data Encryption

Data Encryption Key

Host IP Address 1

Host IP Address 2

### User Name

Setting	Description	Factory Default
Max. 30 characters	Specifies the user name for authentication.	NA

### Auth. Type

Setting	Description	Factory Default
No-Auth	Allows the admin account to access objects without authentication.	No-Auth
MD5-Auth	Authentication will be based on the HMAC-MD5 algorithms. 8-character passwords are the minimum requirement for authentication.	
SHA-Auth	Authentication will be based on the HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.	

### Enable Data Encryption Key

Setting	Description	Factory Default
Enable	Enables data encryption using the specified data encryption key (between 8 and 30 characters).	NA
Disable	No data encryption	NA

### Data Encryption Key

Setting	Description	Factory Default
Max. 30 characters	Specifies the string to use for authentication.	NA

## SNMP Trap Mode—Inform

SNMPv2c, SNMPv3 provides an inform mechanism. When an inform message is sent from the SNMP agent to the NMS, the receiver sends a response to the sender acknowledging receipt of the event. This behavior is similar to that of the get and set requests. If the SNMP agent does not receive a response from the NMS for a set period of time, the agent will resend the trap to the NMS agent. The maximum timeout time is 300 sec (default is 10 sec), and the maximum number of retries is 99 times (default is 3 times). When the SNMP agent receives acknowledgement from the NMS, it will stop resending the inform messages.

### SNMPv2C Inform

Trap/Inform Recipient	
Mode	Inform V2c
Retries(1~99)	3
Timeout(1~300s)	10
Host IP Address 1	
1st Trap Community	public
Host IP Address 2	
2nd Trap Community	public

#### Host IP Address 1

Setting	Description	Factory Default
IP or name	Specifies the IP address or name of the primary trap server used by your network.	NA

#### 1st Trap Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to use for authentication.	Public

#### Host IP Address 2

Setting	Description	Factory Default
IP or name	Specifies the IP address or name of the secondary trap server used by your network.	None

#### 2nd Trap Community

Setting	Description	Factory Default
Max. 30 characters	Specifies the community string to use for authentication.	Public

SNMP V3 version is based on SNMP V2c enhance security features, through the identification and encryption of data, providing the following security features:

1. Ensure that the information must be sent from a legal source.
2. Encrypt the transmitted data to ensure the confidentiality of the data.
3. Use the password principle to ensure that the data of transmission process will not be tampered with.

## SNMPv3 Inform

Trap/Inform Recipient	
Mode	Inform V3
User Name	<input type="text"/>
Auth. Type	No-Auth
Auth. Password	<input type="password"/>
<input type="checkbox"/> Enable Data Encryption	Data Encryption Key <input type="password"/>
Retries(1~99)	3
Timeout(1~300s)	10
Host IP Address 1	<input type="text"/>
Host IP Address 2	<input type="text"/>

### User Name

Setting	Description	Factory Default
Max. 30 characters	Specifies the user name for authentication.	NA

### Auth. Type

Setting	Description	Factory Default
No-Auth	Allows the admin account to access objects without authentication.	No-Auth
MD5-Auth	Authentication will be based on the HMAC-MD5 algorithms. 8-character passwords are the minimum requirement for authentication.	
SHA-Auth	Authentication will be based on the HMAC-SHA algorithms. 8-character passwords are the minimum requirement for authentication.	

### Enable Data Encryption Key

Setting	Description	Factory Default
Enable	Enables data encryption using the specified data encryption key (between 8 and 30 characters).	NA
Disable	No data encryption	NA

### Data Encryption Key

Setting	Description	Factory Default
Max. 30 characters	Specifies the string to use for authentication.	NA

# Industrial Protocols

The Moxa switch supports 3 industrial protocols, EtherNet/IP, Modbus TCP, and PROFINET I/O. All three protocols can be enabled or disabled by checking the appropriate checkbox. All three protocols are disabled by default.

## Industrial Protocol

### EtherNet/IP

Enable EtherNet/IP

**Note:** IGMP snooping will be automatically enabled when EtherNet/IP is activated.

### Modbus TCP

Enable Modbus TCP

### PROFINET I/O

Enable PROFINET I/O

**Note:** SNMP will be automatically enabled (SNMP V1, V2c by default, recommend changing to V3 mode for security reasons) and LLDP settings will be modified to comply with the PROFINET specification when PROFINET I/O is activated.

PROFINET Device Name:

Apply

Setting	Description	Factory Default
PROFINET Device Name	Specifies the PROFINET Device Name. PROFINET Device Name is default empty and can be set according to below rules: 1. The maximum number of characters is 240. 2. The device name cannot be in IP address format. 3. The device name cannot start with "port-" followed by 3 or more digits. 4. Each label must be between 1 and 63 characters long. 5. Labels cannot start or end with a period (.). 6. Labels cannot start or end with a dash (-). 7. Only a-z, 0-9 . - are allowed.	None



## NOTE

1. IGMP Snooping and IGMP Query functions will be enabled automatically to be properly integrated in Rockwell systems for multicast Implicit (I/O) Messaging for efficient EtherNet/IP communication.
2. EtherNet/IP can't be enabled while IGMP snooping is disabled due to VLAN setting.
3. SNMP will be automatically enabled (SNMP V1, V2c by default, recommend changing to V3 mode for security reasons) and LLDP settings will be modified to comply with the PROFINET specification when PROFINET I/O is activated.


## Diagnostics

The Moxa switch provides three important tools for administrators to diagnose network systems: LLDP, Ping, Port Mirror, and Signal Quality.

# LLDP

## Overview

LLDP is an OSI Layer 2 protocol defined by IEEE 802.11AB. LLDP standardizes the self-identification advertisement method, and allows each networking device, such as a Moxa managed switch, to periodically send its system and configuration information to its neighbors. Because of this, all LLDP devices are kept informed of each other's status and configuration, and with SNMP, this information can be transferred to Moxa's MXview for auto-topology and network visualization. From the switch's web interface, you can enable or disable LLDP, and set the LLDP transmit interval. In addition, you can view each switch's neighbor-list, which is reported by its network neighbors. Most importantly, enabling the LLDP function allows Moxa's MXview to automatically display the network's topology and system setup details, such as VLAN and Trunking, for the entire network.

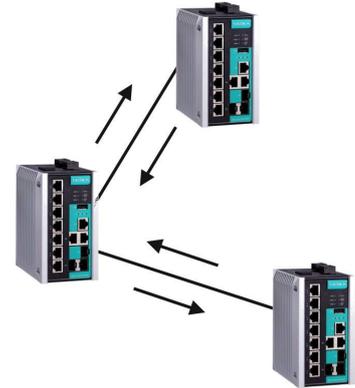

## Configuring LLDP Settings

**LLDP**

Enable LLDP

Message Transmit Interval (sec)

**Apply**

Port	Neighbor ID	Neighbor Port	Neighbor Port Description	Neighbor System
------	-------------	---------------	---------------------------	-----------------

### General Settings

#### LLDP

Setting	Description	Factory Default
Enable or Disable	Enables or disables the LLDP function.	Enable

#### Message Transmit Interval

Setting	Description	Factory Default
5 to 32768 sec.	Sets the transmit interval of LLDP messages, in seconds.	5 (seconds)

### LLDP Table

The LLDP Table displays the following information:

<b>Port</b>	The port number that connects to the neighbor device.
<b>Neighbor ID</b>	A unique entity (typically the MAC address) that identifies a neighbor device.
<b>Neighbor Port</b>	The port number of the neighbor device.
<b>Neighbor Port Description</b>	A textual description of the neighbor device's interface.
<b>Neighbor System</b>	Hostname of the neighbor device.

# Ping

The Ping function uses the ping command to give users a simple but powerful tool for troubleshooting network problems. The function's most unique feature is that even though the ping command is entered from the user's PC keyboard, the actual ping command originates from the Moxa switch itself. In this way, the user can essentially sit on top of the Moxa switch and send ping commands out through its ports.

To use the Ping function, type in the desired IP address, and then press Enter from the Console utility, or click Ping when using the Web Browser interface.



# Port Mirroring

The Port Mirroring function can be used to monitor data being transmitted through a specific port. This is done by setting up other port(s) (the mirror port) to receive the same data being transmitted from, or both to and from, the port under observation. Using a mirror port allows the network administrator to sniff the observed port to keep tabs on network activity.

The mirror port can be set to one port (many-to-one).



Setting	Description
Monitored Port	Select which ports will be monitored
Sniffer Mode	Select one of the following options: <ul style="list-style-type: none"><li>RX: Select this option to monitor only those data packets coming into Moxa's switch.</li><li>TX: Select this option to monitor only those data packets being sent out through Moxa's switch.</li><li>TX/RX: Select this option to monitor data packets both coming in, and being sent out through, Moxa's switch.</li></ul>
Mirror Port	Select the number of the port that will be used to monitor the activity of the monitored port.

# Signal Quality

The Signal Quality function provides continuous monitoring of port signal quality parameters, including SQI, SNR, and BER, providing valuable insights into the physical layer condition of field connections.

Signal Quality				
Port	Media Type	SQI	SNR(dB)	BER
P1	10T1L,SPE	--	--	--
P2	10T1L,SPE	--	--	--
P3	10T1L,SPE	--	--	--
P4	10T1L,SPE	--	--	--
P5	10T1L,SPE	--	--	--
P6	10T1L,SPE	--	--	--
P7	10T1L,SPE	--	--	--
P8	10T1L,SPE	--	--	--


Item	Description
Media Type	Displays the media type for each port
SQI	indicates the SQI (Signal Quality Indicator) of a port.
SNR (dB)	indicates the SNR (Signal-to-Noise Ratio) of a port.
BER	Indicates the BER (Bit Error Rate) of a port.

# Monitoring

You can monitor statistics in real time from the Moxa switch's web console and RS-232 console.

## CPU/Memory Utilization

The CPU/Memory Utilization page displays the status of system resources. Monitor this information to quickly and easily understand the working status of the switch.

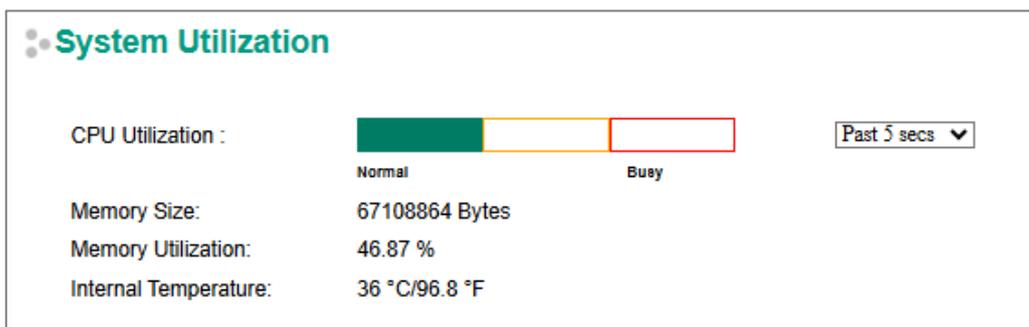

### CPU Utilization

Setting	Description	Factory Default
Read-only	The CPU usage volume in the past 5 seconds, 30 seconds, and 5 minutes. When the system is using less than 50% of CPU usage, the first green bar will fill up. When the CPU usage is between 51% and 75%, the green and yellow bars will be filled. When it exceeds 75%, the system will be considered busy and all green, yellow, and red bars will be filled.	Past 5 secs

### Memory Size and Memory Utilization

Setting	Description	Factory Default
Read-only	The switch's current free memory	None

### Internal Temperature

Setting	Description	Factory Default
Read-only	The internal temperature of the switch.	None


## Statistics

Access the Monitor by selecting **Monitoring** from the left selection bar. Monitor by System allows the user to view a graph that shows the combined data transmission activity of all of the Moxa switch's 18 ports. Click one of the four options—**Total Packets**, **TX Packets**, **RX Packets**, or **Error Packets**—to view transmission activity of specific types of packets. Recall that TX Packets are packets sent out from the Moxa switch, RX Packets are packets received from connected devices, and Error Packets are packets that did not pass TCP/IP's error checking algorithm. The Total Packets option displays a graph that combines TX, RX, and TX Error, RX Error Packet activity. The graph displays data transmission activity by showing **Packets/s** (i.e., packets per second, or pps) versus sec. (i.e., seconds). In fact, three curves are displayed on the same graph: **Uni-cast** packets (in red color), **Multi-cast** packets (in green color), and **Broad-cast** packets (in blue color). The graph is updated every few seconds, allowing the user to analyze data transmission activity in real-time.



### NOTE


All the statistics are extracted from main chip's registers sequentially. Therefore, for a few time stamps the total packet count may not align accurately (e.g. Total  $\neq$  sum of Tx + Rx).

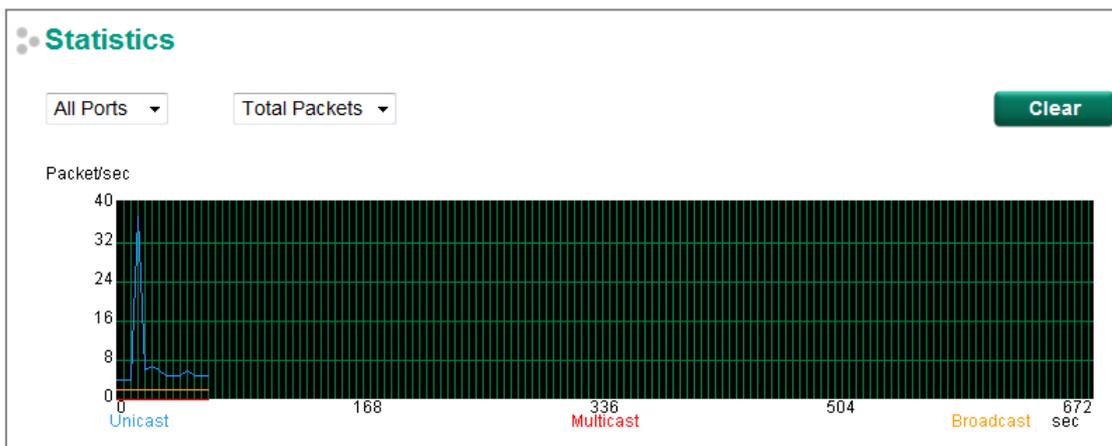

[Format] Total Packets + Packets in past 5 secs				Update Interval: every 5 secs
Port	Tx	Tx Error	Rx	Rx Error
1	0+0	0+0	0+0	0+0
2	16927+54	0+0	25077+50	0+0
3	0+0	0+0	0+0	0+0
4	0+0	0+0	0+0	0+0
5	0+0	0+0	0+0	0+0
6	0+0	0+0	0+0	0+0
7	1375+1	0+0	184+0	0+0
G1	0+0	0+0	0+0	0+0
G2	0+0	0+0	0+0	0+0

### Monitor by Port

Access the Monitor by Port function by selecting **FE** or **GE Ports** or **Port *i***, in which ***i* = 1, 2, ..., G2**, from the left pull-down list. The **Port *i*** options are identical to the Monitor by System function discussed above, in that users can view graphs that show All Packets, TX Packets, RX Packets, or Error Packets activity, but in this case, only for an individual port. The **All Ports** option is essentially a graphical display of the individual port activity that can be viewed with the Console Monitor function discussed above. The All Ports option shows three vertical bars for each port. The height of the bar represents **Packets/s** at the instant the bar is being viewed. That is, as time progresses, the height of the bar moves up or down so that the user can view the change in the rate of packet transmission. The blue colored bar shows **Uni-cast** packets, the red colored bar shows **Multi-cast** packets, and the orange colored bar shows **Broad-cast** packets. The graph is updated every few seconds, allowing the user to analyze data transmission activity in real-time.

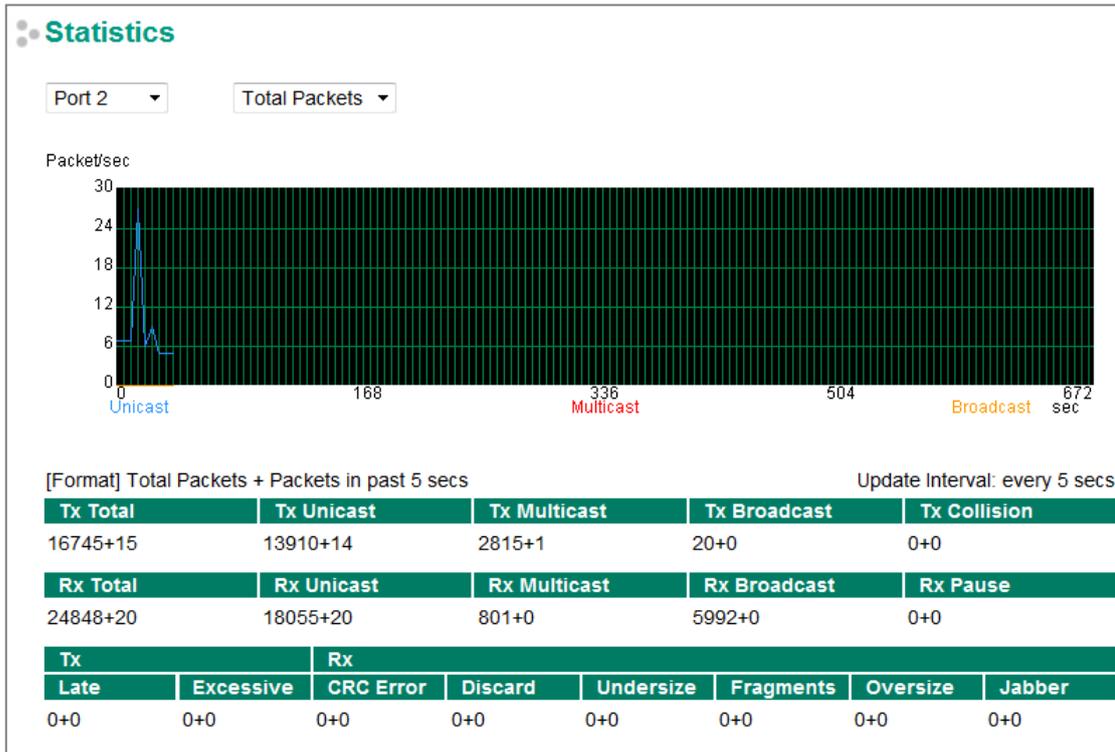

## Fiber Digital Diagnostics Monitoring (SFP DDM and Fiber Check)

Optical fiber is commonly used for long distance data transmission. However, when link issues occur, it is very costly to troubleshoot fiber cables and fiber transceivers at remote sites. To solve this problem, Moxa industrial Ethernet switches provide digital diagnostics and monitoring (DDM) functions on Moxa SFP's and/or fixed type (multi-mode SC/ST and single-mode SC connectors) optical fiber links and allow users to measure optical parameters and its performance from a central site. This function can greatly facilitate the troubleshooting process for optical fiber links and reduce costs for onsite debugging. Two different categories of Moxa switches support Fiber Digital Diagnostics Monitoring functions: SFP DDM and Fiber Check.

Type	Models Supported
SFP DDM	IKS-6726A, IKS-6728A, IKS-6728A-8PoE, IKS-G6524A, IKS-G6824A, ICS-G7526A, ICS-G7826A, ICS-G7528A, ICS-G7828A, ICS-G7748A, ICS-G7848A, ICS-G7750A, ICS-G7850A, ICS-G7752A, ICS-G7852A Series
Fiber Check	TWS-3010-SPE, TWS-3010-APL, EDS-510E, EDS-518E, EDS-528E, EDS-G508E, EDS-G512E, EDS-G516E

## SFP Digital Diagnostic Monitor

 SFP Digital Diagnostic Monitor

Port	Model Name	Temperature (°C)	Voltage (V)	Tx Power (dBm)	Rx Power (dBm)
G2	SFP-1GLXLC-T	31.5	3.3	-7.5	-29.7
G3	SFP-1GLXLC-T	35.6	3.3	-6.7	-35.4

Parameter	Description
Port	Switch port number that the SFP is plugged into
Model Name	Moxa SFP model name
Temperature (°C)	SFP casing temperature
Voltage (V)	Voltage supplied to the SFP
Tx power (dBm)	The amount of light being transmitted into the fiber optic cable
Rx power (dBm)	The amount of light being received from the fiber optic cable



### NOTE

Certain tolerances exist between real data and measured data.

Parameters	Tolerance
Temperature (°C)	±3°C
Voltage (V)	±0.1 V
Tx power (dBm)	±3 dB
Rx power (dBm)	±3 dB

## Threshold Settings

Manually set the upper and lower bounds of each parameter, including temperature, Tx power, and Rx power, according to specific application needs.

### Threshold Settings

Port	Enable	Temperature (°C)	Tx Power(dBm)		Rx Power(dBm)
		Upper Bound	Upper Bound	Lower Bound	Lower Bound
G1	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
G2	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Parameter	Description
Port	Switch port number with a fiber connection.
Enable	Enable the setting into the SFP status table.
Temperature (°C) - Upper Bound	The maximum temperature of the fiber connection.
Tx Power(dBm) - Upper Bound	The maximum threshold of light being transmitted into the fiber optic cable.
Tx Power(dBm) - Lower Bound	The minimum threshold of light being transmitted into the fiber optic cable.
Rx Power(dBm) - Lower Bound	The maximum threshold of light being received from the fiber optic cable.

## SFP Status

SFP Status is used to diagnose the link status of fiber connectors, including SFP and fixed type (Multi-mode SC/ST & Single-mode SC) connectors. Monitor the temperature, TX/RX power, and other parameters on fiber ports to determine if the ports are working properly. Enable the trap, email warning, and/or relay warning functions on the System Event Settings page to receive an alarm or relay if one of the fiber ports exceeds the threshold for that port.

### SFP Status

Port	Model Name	SN	Wavelength (nm)	Vcc (V)	Temperature (°C)		Tx Power (dBm)		Rx Power (dBm)	
					Current	Max.	Current	Max./Min.	Current	Min.
G16	SFP-1GLXLC-T	JC16070118	1310	3.3	33.7	120.00	-6.0	0.00/-12.50	-6.5	-20.00

Parameter	Description
Port	Switch port number with a fiber connection.
Model Name	Moxa SFP/fixed type fiber model name.
SN	Fiber connector production serial number
Wavelength (nm)	Wavelength of the fiber connection.
Vcc (V)	Voltage supply to the fiber connection.
Temperature (°C) - Current	Fiber connection current temperature.
Temperature (°C) - Max.	Fiber connection Max. temperature threshold.
Tx power (dBm) - Current	The current amount of light being transmitted into the fiber optic cable.
Tx power (dBm) - Max.	The Max. threshold of light being transmitted into the fiber optic cable.
Tx power (dBm) - Min.	The Min. threshold of light being transmitted into the fiber optic cable.
Rx power (dBm) - Current	The current amount of light being received from the fiber optic cable.
Rx power (dBm) - Max.	The Max. threshold of light being received from the fiber optic cable.

## SFP Status Threshold Values

Model Name	Temperature Threshold (°C)	Tx Power (Max./Min.) (dBm)	Rx Power (Min.) (dBm)
FEMST	120	-11.0/-23.0	-31.0
FEMSC	120	-11.0/-23.0	-31.0
FESSC	120	3.0/-8.0	-34.0
SFP-1FEMLC-T	120	-5.0/-21.0	-37.0
SFP-1FESLC-T	120	3.0/-8.0	-37.0
SFP-1FELLC-T	120	3.0/-8.0	-37.0
SFP-1GSXLC-T	110	-1.0/-12.5	-18.0
SFP-1GLSXLC-T	120	2.0/-12.0	-19.0
SFP-1GLXLC-T	120	0.0/-12.5	-20.0
SFP-1GLHLC-T	120	1.0/-11.0	-23.0
SFP-1GLHXLC-T	120	4.0/-7.0	-24.0
SFP-1GZXLC-T	120	8.0/-3.0	-24.0
SFP-1G10ALC-T	120	0.0/-12.0	-21.0
SFP-1G10BLC-T	120	-5.0/-21.0	-34.0
SFP-1G20ALC-T	120	1.0/-11.0	-23.0
SFP-1G20BLC-T	120	-5.0/-21.0	-34.0
SFP-1G40ALC-T	120	5.0/-6.0	-23.0
SFP-1G40BLC-T	120	-5.0/-21.0	-34.0
SFP-1GSXLC	100	-1.0/-12.5	-18.0
SFP-1GLSXLC	100	2.0/-12.0	-19.0
SFP-1GLXLC	100	0.0/-12.5	-20.0
SFP-1GLHLC	100	1.0/-11.0	-23.0
SFP-1GLHXLC	100	4.0/-7.0	-24.0
SFP-1GZXLC	100	8.0/-3.0	-24.0
SFP-1GEZXLC	100	8.0/-3.0	-30.0
SFP-1GEZXLC-120	100	6.0/-5.0	-33.0
SFP-1G10ALC	100	0.0/-12.0	-21.0
SFP-1G10BLC	100	-5.0/-21.0	-34.0
SFP-1G20ALC	100	1.0/-11.0	-23.0
SFP-1G20BLC	100	-5.0/-21.0	-34.0
SFP-1G40ALC	100	5.0/-6.0	-23.0
SFP-1G40BLC	100	-5.0/-21.0	-34.0



### NOTE

Certain tolerances exist between real data and measured data.

# Event Log

 **Event Log**

Page 48/48 ▾

Index	Bootup Number	Date	Time	System Startup Time	Event
706	125	--	--	0d2h52m41s	Port 2 link on
707	125	--	--	0d3h0m49s	192.168.127.66 admin Auth. ok
708	125	--	--	0d3h6m4s	192.168.127.66 admin Auth. ok
709	125	--	--	0d3h11m56s	Port 7 link on
710	125	--	--	0d3h12m14s	Port 7 link off
711	125	--	--	0d3h12m16s	Port 7 link on
712	125	--	--	0d3h12m18s	Port 7 link off
713	125	--	--	0d3h12m19s	Port 7 link on
714	125	--	--	0d3h30m39s	192.168.127.66 admin Auth. ok

Clear
Refresh

The Event Log Table displays the following information:

Index	Event index assigned to identify the event sequence.
Bootup Number	This field shows how many times the Moxa switch has been rebooted or cold started.
Date	The date is updated based on how the current date is set in the Basic Setting page.
Time	The time is updated based on how the current time is set in the Basic Setting page.
System Startup Time	The system startup time related to this event.
Event	Events that have occurred.

## Session Monitor

Session Monitor					
Session ID	UserName	Type	Login Date	Login Time	Login IP
3597238739	admin	web	2022/01/20	11:04:53	192.168.127.87
10005552	admin	telnet	2022/01/20	11:05:41	192.168.127.87
10006432	admin	console	2022/01/20	11:05:34	N/A

[Refresh](#)

The Session Monitor page displays current connected management session. The Table contains the following information:

Parameter	Description
Session ID	To identify different login session.
Username	The user account that is used to login by the management session.
Type	This field shows the type of management session, including web and console such as Telnet, serial and SSH.
Login Date	The date is updated based on how the current date is set in the Basic Setting page.
Login Time	The time is updated based on how the current date is set in the Basic Setting page.
Login IP	The IP address of the device used to login web console.

## Tracking

The tracking function can monitor the status of a port, the status of an interface, and the availability of a host by pinging it. The status of tracking (up/down) is the result of the monitored target. The tracking function can bind a tracking entry and perform a specific action according to the status of the tracking entry.

### Tracking Function

Tracking Function	
<input type="checkbox"/> Enable	<a href="#">Apply</a>

#### Enable Tracking Function

Setting	Description	Factory Default
Enable	Select the Enable checkbox to enable the Tracking Function.	Disabled
Disable	Deselect the Enable checkbox to disable the Tracking Function.	

# Interface Tracking

Monitor a port interface. If the status of interface tracking entry is down, it means that the port interface is down. Alternatively, the status of the interface tracking entry is up.

### Interface Tracking

Enable   
 Tracking ID   
 Port   
 Interval (ms)   
 Up Delay (ms)  100,000 means the status does not change from down to up  
 Down Delay (ms)  100,000 means the status does not change from up to down

All	TID	Interface	Interval (ms)	Up Delay (ms)	Down Delay (ms)	Enable
-----	-----	-----------	---------------	---------------	-----------------	--------

### Enable Interface Tracking

Setting	Description	Factory Default
Enable	Select the Enable checkbox to enable the interface tracking entry.	Enabled
Disable	Deselect the Enable checkbox to disable the interface tracking entry.	

### Tracking ID

Setting	Description	Factory Default
1 to 64	The tracking ID of the interface tracking entry.	No



## NOTE

The tracking ID has to be unique.

### Interface Type

Setting	Description	Factory Default
Port	The type of the monitored interface.	Port



## NOTE

The port cannot be modified if the configuration is applied.

### Port / VID

Setting	Description	Factory Default
All the existing ports / All the existing layer 3 interfaces	The monitored interface.	The first port

### Interval (ms)

Setting	Description	Factory Default
100 to 100,000 ms	The interval that the interface tracking checks the status of the monitored port or layer 3 interface.	1,000 ms

### Up Delay (ms)

Setting	Description	Factory Default
0 to 100,000 ms	The threshold that the status of interface tracking changes from down to up when the status of the monitored port or layer 3 interface is greater than or equal to the up delay.	1,000 ms

If the **Up Delay** is 0 ms, then the status of the interface tracking changes immediately when the status of a monitored interface changes from down to up. On the other hand, if the Up Delay is 100,000 ms, then the status of the interface tracking entry would never change from down to up.

#### Down Delay (ms)

Setting	Description	Factory Default
0 to 100,000 ms	The threshold that the status of interface tracking changes from up to down when the status of the monitored port or layer 3 interface is down greater than or equal to the down delay.	1,000 ms

If the **Down Delay** is 0 ms, then the status of interface tracking changes immediately when the status of a monitored interface changes from up to down. On the other hand, if the **Down Delay** is 100,000 ms, then the status of the interface tracking entry never changes from up to down.

## Ping Tracking

### Ping Tracking

Enable

Tracking ID

IP Address

Interval (ms)

Timeout (ms)

Received

Lost

All	TID	IP Address	Interval (ms)	Timeout (ms)	Received	Lost	Enable
<input type="checkbox"/>	3	192.168.2.1	1000	10	3	3	Enable

Monitor an IP address. If the status of ping tracking is down, it means that the IP address is disconnected. Otherwise, the status of ping tracking is up.

#### Enable Ping Tracking

Setting	Description	Factory Default
Enable	Select the Enable checkbox to enable ping tracking.	Enable
Disable	Deselect the Enable checkbox to disable ping tracking.	

#### Tracking ID

Setting	Description	Factory Default
1 to 64	The tracking ID of ping tracking.	No



### NOTE

The tracking ID has to be unique.

#### IP Address

Setting	Description	Factory Default
Valid IP address	The monitored IP address.	No

#### Interval (ms)

Setting	Description	Factory Default
100 to 100,000 ms	The interval that ping tracking pings the monitored IP address.	1,000 ms

### Timeout (ms)

Setting	Description	Factory Default
1 to 100,000 ms	The interval that ping tracking pings the monitored IP address before timing out.	100 ms

### Received

Setting	Description	Factory Default
1 to 100	The threshold that the status of ping tracking changes from down to up when the switch continuously receives ping replies greater than or equal to the received value.	3



## NOTE

If the Received is equal to or greater than 100 (times), then the status of ping tracking never changes from down to up.

### Lost

Setting	Description	Factory Default
1 to 100	The threshold that the status of ping tracking changes from up to down when the switch continuously loses the ping replies greater than or equal to the lost value.	3



## NOTE

If the Lost value is 100 (times), then the status of the Ping Tracking entry never changes from down to up.

## Logic Tracking

Logic Tracking can monitor all of the tracking entries. There are three operator modes: NOT, AND, and OR. With operator AND, if all the statuses of the entries in the Logical List are up, then the status of the logic tracking entry is up. Otherwise, the status of the logic tracking entry is down. With operator OR, if all the statuses of the entries in the Logical List are down, the status of the logic tracking entry is down. Otherwise, the status of the logic tracking entry is up. Operator NOT means the status of the logic tracking entry will be reversed after AND or OR logic operator.

**Logical Tracking**

Enable

Tracking ID

Logical List

Logical Operator  NOT  AND  OR

All	TID	Logic List	Enable
-----	-----	------------	--------

### Enable Logic Tracking

Setting	Description	Factory Default
Enable	Select the Enable checkbox to enable logic tracking.	Enable
Disable	Deselect the Enable checkbox to disable logic tracking.	

### Tracking ID

Setting	Description	Factory Default
1 to 64	The tracking ID of the logic tracking feature	No



## NOTE

The Tracking ID has to be unique.

### Logic List

Setting	Description	Factory Default
NULL	Two to four monitored tracking entries, and the logic tracking ID must be bigger than all monitored tracking entries.	NULL
All of the existing tracking entries		



## NOTE

Select at least two monitored tracking entries in the Logical List.

### Logic Operator

Setting	Description	Factory Default
AND	The logic operator is used to operate the status of the logic tracking.	AND
OR		
NOT		



## NOTE

The Logic Operator cannot be modified if the configuration is applied.

## Tracking Table

**Tracking Table**

All Tracking ▾ Page 1/1 ▾ 4/64

TID	Type	Interface / IP Address / Logic List	Status	Time Since Last Change	No. of Change	Enable
1	Interface	Port 1-1	Down	0d0h12m39s	1	Enable
2	Interface	VLAN 2	Down	0d0h12m39s	1	Enable
3	Ping	192.168.2.1	Up	0d0h12m30s	0	Enable
4	Logical	[AND] TID 1, TID 2, TID 3	Down	0d0h12m17s	0	Enable

The Tracking Table shows all the information of the different types of tracking.

### Drop Down List

<b>All Tracking</b>	Select this item to show all of the tracking information.
<b>Interface Tracking</b>	Select this item to show all the interface tracking information.
<b>Ping Tracking</b>	Select this item to show the ping tracking information.
<b>Logical Tracking</b>	Select this item to show the logical tracking information.

The table displays the following information:

<b>TID</b>	This field shows the Tracking ID.
<b>Type</b>	This field shows the tracking entry type.
<b>Interface / IP Address / Logic List</b>	This field shows the monitored target.
<b>Status</b>	This field shows the status of the tracking entry.
<b>Time Since Last Change</b>	This field shows the time that has passed since the last status change.
<b>No. of Change</b>	This field shows the number of changes that have happened under the tracking feature.
<b>Enable</b>	This field shows whether the tracking entry is enabled or disabled.

# A. MIB Groups

---

The Moxa switch comes with built-in SNMP (Simple Network Management Protocol) agent software that supports cold/warm start trap, line up/down trap, and RFC 1213 MIB-II.

The standard MIB groups that the Moxa switch supports are as follows:

## **MIB II.1—System Group**

sysORTable

## **MIB II.2—Interfaces Group**

ifTable

## **MIB II.4 – IP Group**

ipAddrTable

ipNetToMediaTable

IpGroup

IpBasicStatsGroup

IpStatsGroup

## **MIB II.5—ICMP Group**

IcmpGroup

IcmpInputStatus

IcmpOutputStats

## **MIB II.6—TCP Group**

tcpConnTable

TcpGroup

TcpStats

## **MIB II.7—UDP Group**

udpTable

UdpStats

## **MIB II.10—Transmission Group**

dot3

dot3StatsTable

## **MIB II.11—SNMP Group**

SnmpBasicGroup

SnmpInputStats

SnmpOutputStats

## **MIB II.17—dot1dBridge Group**

dot1dBase

dot1dBasePortTable

dot1dStp

```

        dot1dStpPortTable
dot1dTp
        dot1dTpFdbTable
        dot1dTpPortTable
        dot1dTpHCPortTable
        dot1dTpPortOverflowTable
pBridgeMIB
        dot1dExtBase
        dot1dPriority
        dot1dGarp
qBridgeMIB
        dot1qBase
        dot1qTp
                dot1qFdbTable
                dot1qTpPortTable
                dot1qTpGroupTable
                dot1qForwardUnregisteredTable
        dot1qStatic
                dot1qStaticUnicastTable
                dot1qStaticMulticastTable
        dot1qVlan
                dot1qVlanCurrentTable
                dot1qVlanStaticTable
                dot1qPortVlanTable

```

The private MIB file can be downloaded from Moxa's website: [www.moxa.com](http://www.moxa.com).

### Public Traps

- Cold Start
- Link Up
- Link Down
- Authentication Failure
- dot1dBridge New Root
- dot1dBridge Topology Changed

### Private Traps

- Configuration Changed
- Power On
- Power Off
- Traffic Overloaded
- PoDL Status Changed
- APL Power Supply Status Changed
- PortLoopDetectedTrap
- RateLimitedOnTrap
- LLDPChgTrap