

NPort W2150A/W2250A 系列

1 和 2 埠 RS-232/422/485 IEEE 802.11a/b/g 無線串列設備伺服器



特色與優點

- 可將任何串列裝置連接至 IEEE 802.11a/b/g 網路
- 透過內建乙太網路或 WLAN 執行 Web-based 設定
- 強化的區域網路、串列和電力突波保護
- 利用 HTTPS 和 SSH 強化遠端設定
- 透過 WEP、WPA 和 WPA2 保護存取資料的安全性
- 快速漫遊，可在存取點之間快速自動切換
- 具備離線埠緩衝和串列資料記錄功能
- 雙電源輸入 (1 螺旋式電源接頭、1 端子台)

認證



簡介

NPort® W2150A 和 W2250A 是將串列和乙太網路裝置 (例如 PLC、儀表和感測器) 連接到無線 LAN 的理想選擇。您的通訊軟體將能夠透過無線 LAN 隨處存取串列裝置。此外，無線裝置伺服器需要較少纜線，相當適合不便佈線的應用。在基礎架構模式或 Ad-Hoc 模式中，NPort® W2150A 和 NPort® W2250A 可以連接辦公室和工廠的 Wi-Fi 網路，以便使用者在多個 AP (存取點) 之間移動或漫遊，並且對於經常在不同的地點之間移動的裝置提供絕佳的解決方案。

規格

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	1
Magnetic Isolation Protection	1.5 kV (built-in)
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X)

Ethernet Software Features

Configuration Options	Web Console (HTTP/HTTPS), Windows Utility
Management	DHCP Option 82, HTTP, IPv4, SMTP, SNMPv1/v2c/v3, Syslog, Telnet, Web Console
Windows Real COM Drivers	Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2/2016/2019 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded
Linux Real TTY Drivers	Kernel versions: 2.4.x, 2.6.x, 3.x, 4.x, and 5.x
Fixed TTY Drivers	SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X
Android API	Android 3.1.x and later
MIB	Device Settings MIB, RFC1213, RFC1317

Security	HTTPS/SSL, User Authentication Management: local database, RADIUS, Secure Protocols: HTTPS (TLSv1.2), SSH, SNMPv3, Cryptography: HMAC, SHA-1, SHA-256, SHA-384, RSA-1024, AES-128, AES-256
Time Management	NTP Client, SNTP Client

WLAN Interface

WLAN Standards	802.11a/b/g/n
Receiver Sensitivity for 802.11a (measured at 5.680 GHz)	Typ. -91 @ 6 Mbps Typ. -74 @ 54 Mbps
Receiver Sensitivity for 802.11b (measured at 2.437 GHz)	Typ. -92 dBm @ 1 Mbps Typ. -84 dBm @ 11 Mbps
Receiver Sensitivity for 802.11g (measured at 2.437 GHz)	Typ. -91 dBm @ 6 Mbps Typ. -73 dBm @ 54 Mbps
Receiver Sensitivity for 802.11n (2.4 GHz; measured at 2.437 GHz)	Typ. -89 dBm @ 6.5 Mbps (20 MHz) Typ. -71 dBm @ 72.2 Mbps (20 MHz)
Receiver Sensitivity for 802.11n (5 GHz; measured at 5.680 GHz)	Typ. -89 dBm @ 6.5 Mbps (20 MHz) Typ. -71 dBm @ 72.2 Mbps (20 MHz) Typ. -85 dBm @ 13.5 Mbps (40 MHz) Typ. -67 dBm @ 150 Mbps (40 MHz)
Modulation Type	DSSS OFDM
Transmission Distance	Up to 100 meters (in open areas)
Transmission Rate	802.11a/g: 54 Mbps 802.11b: 11 Mbps 802.11n: 6.5 to 150 Mbps
Transmitter Power for 802.11b	16±1.5 dBm @ 1 Mbps 16±1.5 dBm @ 11 Mbps
Transmitter Power for 802.11g	16±1.5 dBm @ 6 Mbps 14±1.5 dBm @ 54 Mbps
Transmitter Power for 802.11a	15±1.5 dBm @ 6 Mbps 14±1.5 dBm @ 54 Mbps
Transmitter Power for 802.11n (2.4 GHz)	16 dBm @ 1.5 Mbps (6.5 MHz) 12 dBm @ 1.5 Mbps (72.2 MHz)
Transmitter Power for 802.11n (5 GHz)	15 dBm @ 1.5 Mbps (6.5 MHz) 12 dBm @ 1.5 Mbps (150 MHz)
Frequency Band for CN (20 MHz operating channels)	2.412 to 2.472 GHz (13 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ¹ 5.745 to 5.825 GHz (5 channels)
Frequency Band for EU (20 MHz operating channels)	2.412 to 2.472 GHz (13 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ¹ 5.500 to 5.700 GHz (11 channels) ¹
Frequency Band for JP (20 MHz operating channels)	2.412 to 2.484 GHz (14 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ¹ 5.500 to 5.700 GHz (11 channels) ¹
Frequency Band for US (20 MHz operating channels)	2.412 to 2.462 GHz (11 channels)

1. 支援 DFS (動態頻率選擇) 頻道：在 AP 模式下，當設備偵測到一個雷達信號，會自動切換到另一個頻道。然而，根據規定，當頻道切換後，若要重啟服務，需要 60 秒的可用性檢查期。

	5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ² 5.500 to 5.700 GHz (11 channels) ² 5.745 to 5.825 GHz (5 channels)
Wireless Security	WEP encryption (64-bit and 128-bit) WPA/WPA2-Enterprise (IEEE 802.1X/RADIUS, TKIP, AES) WPA/WPA2-Personal
WLAN Modes	Ad-hoc Mode, Infrastructure mode

Serial Interface

Connector	DB9 male
No. of Ports	NPort W2150A/W2150A-T: 1 NPort W2250A/W2250A-T: 2
Serial Standards	RS-232, RS-422, RS-485
Operation Modes	Real COM mode, TCP Server mode, TCP Client mode, UDP mode, RFC2217 mode, Pair Connection mode, Ethernet Modem mode, Disabled
Baudrate	50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, RTS/CTS, XON/XOFF
RS-485 Data Direction Control	ADDC® (automatic data direction control)
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	120 ohms
Surge	1 kV

Physical Characteristics

Housing	Metal
Installation	Desktop, DIN-rail mounting (with optional kit), Wall mounting
Dimensions (with ears, without antenna)	77 x 111 x 26 mm (3.03 x 4.37 x 1.02 in)
Dimensions (without ears or antenna)	100 x 111 x 26 mm (3.94 x 4.37 x 1.02 in)
Weight	NPort W2150A/W2150A-T: 547 g (1.21 lb) NPort W2250A/W2250A-T: 557 g (1.23 lb)
Antenna Length	109.79 mm (4.32 in)

Environmental Limits

Operating Temperature	Standard Models: 0 to 55°C (32 to 131°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 75°C (-40 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

2. 支援 DFS (動態頻率選擇) 頻道：在 AP 模式下，當設備偵測到一個雷達信號，會自動切換到另一個頻道。然而，根據規定，當頻道切換後，若要重啟服務，需要 60 秒的可用性檢查期。

Power Parameters

Input Current	NPort W2150A/W2150A-T: 179 mA @ 12 VDC NPort W2250A/W2250A-T: 200 mA @ 12 VDC
Input Voltage	12 to 48 VDC

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11
Radio Frequency	CE (ETSI EN 301 893, ETSI EN 300 328, ETSI EN 301 489-17, ETSI EN 301 489-1), ARIB RCR STD-33, ARIB STD-66

Reliability

Alert Tools	RTC (real-time clock)
Automatic Reboot Trigger	Built-in WDT

MTBF

Time	NPort W2150A/W2150A-T: 383,187 hrs NPort W2250A/W2250A-T: 363,327 hrs
Standards	Telcordia (Bellcore) Standard TR/SR

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x NPort W2150A/W2250A Series device server
Power Supply	1 x power adapter, suitable for your region (standard temp. models only)
Antenna	1 x 2.4/5 GHz antenna
Documentation	1 x quick installation guide 1 x warranty card

尺寸

單位：公釐（英吋）

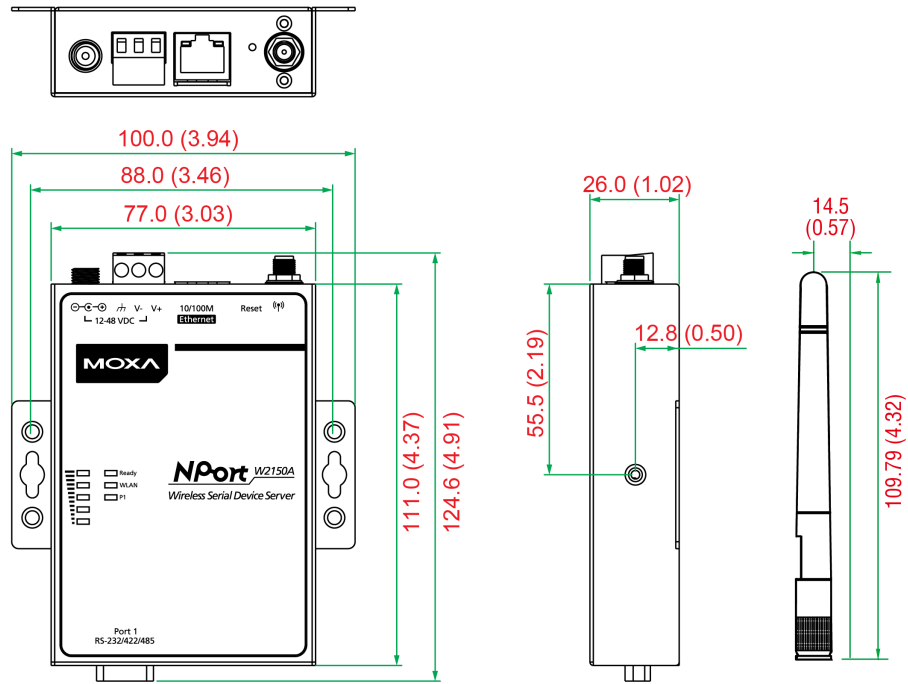

訂購資訊

Model Name	No. of serial ports	WLAN Channels	Input Current	Operating Temp.	Power Adapter in Box	Notes
NPort W2150A-CN	1	China bands	179 mA @ 12 VDC	0 to 55°C	Yes (CN plug)	—
NPort W2150A-EU	1	Europe bands	179 mA @ 12 VDC	0 to 55°C	Yes (EU/UK/AU plug)	—
NPort W2150A-EU/KC	1	Europe bands	179 mA @ 12 VDC	0 to 55°C	Yes (EU plug)	KC certificate
NPort W2150A-JP	1	Japan bands	179 mA @ 12 VDC	0 to 55°C	Yes (JP plug)	—
NPort W2150A-US	1	US bands	179 mA @ 12 VDC	0 to 55°C	Yes (US plug)	—
NPort W2150A-T-CN	1	China bands	179 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2150A-T-EU	1	Europe bands	179 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2150A-T-JP	1	Japan bands	179 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2150A-T-US	1	US bands	179 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2250A-CN	2	China bands	200 mA @ 12 VDC	0 to 55°C	Yes (CN plug)	—
NPort W2250A-EU	2	Europe bands	200 mA @ 12 VDC	0 to 55°C	Yes (EU/UK/AU plug)	—
NPort W2250A-EU/KC	2	Europe bands	200 mA @ 12 VDC	0 to 55°C	Yes (EU plug)	KC certificate
NPort W2250A-JP	2	Japan bands	200 mA @ 12 VDC	0 to 55°C	Yes (JP plug)	—
NPort W2250A-US	2	US bands	200 mA @ 12 VDC	0 to 55°C	Yes (US plug)	—
NPort W2250A-T-CN	2	China bands	200 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2250A-T-EU	2	Europe bands	200 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2250A-T-JP	2	Japan bands	200 mA @ 12 VDC	-40 to 75°C	No	—
NPort W2250A-T-US	2	US bands	200 mA @ 12 VDC	-40 to 75°C	No	—

配件 (選購)

Antennas

ANT-WDB-ARM-02	2.4/5 GHz, omni-directional rubber duck antenna, 2 dBi, RP-SMA (male)
----------------	---

Cables

CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm

Connectors

ADP-RJ458P-DB9F	DB9 female to RJ45 connector
Mini DB9F-to-TB	DB9 female to terminal block connector

DIN-Rail Mounting Kits

DK35A	DIN-rail mounting kit, 35 mm
-------	------------------------------

Power Adapters

PWR-12050-WPAU-S1	Locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, Australia (AU) plug, 0 to 40°C operating temperature
PWR-12050-WPCN-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, China (CN) plug, 0 to 40°C operating temperature
PWR-12050-WPEU-S1	Locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, Continental Europe (EU) plug, 0 to 40°C operating temperature
PWR-12050-WPUK-S1	Locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, United Kingdom (UK) plug, 0 to 40°C operating temperature
PWR-12050-WPUSJP-S1	Locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, United States/Japan (US/JP) plug, 0 to 40°C operating temperature
PWR-12150-AU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100-240 VAC, Australia (AU) plug, -40 to 75°C operating temperature Applicable Models: NPort W2150A-T NPort W2250A-T
PWR-12150-CN-SA-T	Wide-temperature (-40 to 75°C) locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, China (CN) plug Applicable Models: NPort W2150A-T NPort W2250A-T
PWR-12150-EU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100-240 VAC, Continental Europe (EU) plug, -40 to 75°C operating temperature Applicable Models: NPort W2150A-T NPort W2250A-T
PWR-12150-UK-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100-240 VAC, United Kingdom (UK) plug, -40 to 75°C operating temperature Applicable Models: NPort W2150A-T NPort W2250A-T
PWR-12150-USJP-SA-T	Locking barrel plug, 12 VDC 1.5 A, 100-240 VAC, United States/Japan (US/JP) plug, -40 to 75°C operating temperature Applicable Models: NPort W2150A-T NPort W2250A-T

Power Cords

CBL-PJ21NOPEN-BK-30	Locking barrel plug to bare-wire cable
---------------------	--

© Moxa Inc. 版權所有.2021 年 1 月 25 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。